


86

PRE-MIUM

ANNAPOLIS PBA

<19
LOW UGR

5
YEARS
WARRANTY



155 actual lm/W
155 lm/W réels

NEW



87

PRE-MIUM

**ACROPOLIS
P6060EUGR65**

IP65

<19
LOW UGR

5
YEARS
WARRANTY

88

PRE-MIUM

METROPOLIS P60X60EUGR9

CRI>90

<19
LOW UGR

5
YEARS
WARRANTY



89

PRO

TRIPOLIS

P6060UGR / P30120UGR / P60120UGR

<19
LOW UGR

IP20
IP40



90

PRO

MICROPOLIS P3030 / P3060

IP20
IP40

5
YEARS
WARRANTY



92


ECO

**NEAPOLIS
PBN2.**

<19
LOW UGR



NEW





93

ECO

EXAPOLIS PBE2.

BACKLIGHT



ANNAPOLIS

PREMIUM

PBA

4000K

3000K

220-240Vac
50/60Hz

FLICKER FREE

<19

LOW UGR

CRI >80

COS ϕ >0,9

50.000 h

OFF ON
x 20.000

IP20

DE

BL

RAL 9003

90°

5 YEARS WARRANTY

• Material

PS

AL

PET

DIFFUSER

BODY

REFLECTOR

• Certif.

CE

• Dimming Options

0-10V

DALI

PUSH

CASAMBI

• Optional

UE DRIVER

Ref. KEU603

1-10V
Ref. SL20

ON-OFF
Ref. SP20

• Accessories

PBA6060U

Ref. ASM60X60V3

Ref. AEM60X60
Ref. AEP60X60V3

Ref. AS60X60V3

Ref. ATP6060

PBA30120U

Ref. ASM30X120V3

Ref. AEM30X120
Ref. AEP120V3


Ref. AS120V3

Ref. ATP30120

Ref. CS2G



BACKLIGHT
UGR<19
155 actual lm/W
155 lm/W réels

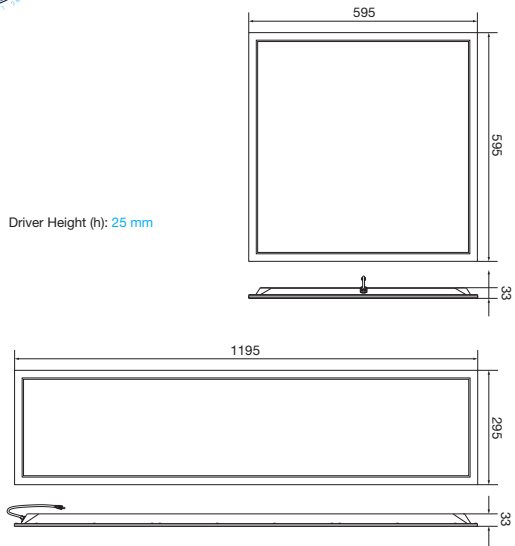

Measures (mm).

	OPTIONS	K		W		
PBA6060U40	*	 4000K	595x595x33 mm	26 W	4550 lm	4030 lm
PBA6060U30	*	 3000K	595x595x33 mm	26 W	4140 lm	3750 lm
PBA30120U40	*	 4000K	1195x295x33 mm	26 W	4550 lm	4030 lm
PBA30120U30	*	 3000K	1195x295x33 mm	26 W	4140 lm	3750 lm

ACROPOLIS

PREMIUM

P6060EUGR65

6000K

4000K

180-265Vac
50/60Hz

FLICKER FREE

<19

LOW UGR

CRI >80

COS ϕ >0,95

50.000 h

OFF ON
x 30.000

IP65

BL

DE

RAL 9003

120°

5 YEARS WARRANTY

• Material

PS

AL

DIFFUSER

BODY

• Dimming Options

0-10V

DALI

PUSH

• Accessories

Ref. ASC60X60


Ref. AEM60X60

• Certif.

CE



IP65
UGR<19

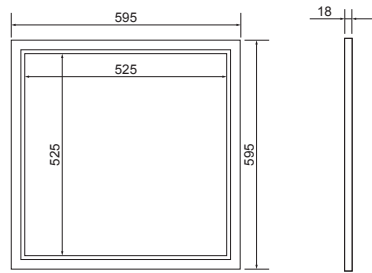


Measures (mm).

	K		W		
P6060EUGR65*BF	6000K	595x595x18 mm	40 W	5200 lm	4400 lm
P6060EUGR65*BN	4000K	595x595x18 mm	40 W	5120 lm	4280 lm
* Dimming Opt.					
DT 0-10V, DALI, PUSH					

METROPOLIS

PREMIUM P60X60EUGR9

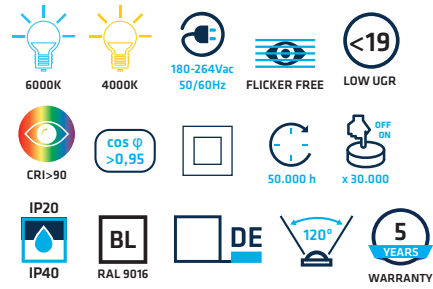

• Material

PS AL

DIFFUSER BODY

• Certif.

CE CB

• Dimming Options

0-10V DALI PUSH CASAMBI 0-10V Ref. MDRF


• Optional

UE DRIVER IP44 KE Ref. KEU2403V2 1-10V Ref. SL20 ON-OFF Ref. SP20

• Accessories


Ref. ASC60X60 Ref. ASM60X60V2 Ref. ASE60X60 Ref. AEM60X60 Ref. ASP60X60 Ref. AS60X60 Ref. ATP6060 Ref. CS2G

	K		W		
P60X60EUGR9*BF	6000K	595x595x10 mm	40 W	5200 lm	4400 lm
P60X60EUGR9*BN	4000K	595x595x10 mm	40 W	5120 lm	4280 lm
* Dimming Opt.			* Optional		
DT	0-10V, DALI, PUSH	D2	DALI / PUSH (● 4000K)	UE	UE DRIVER
CS	CASAMBI			44	IP44

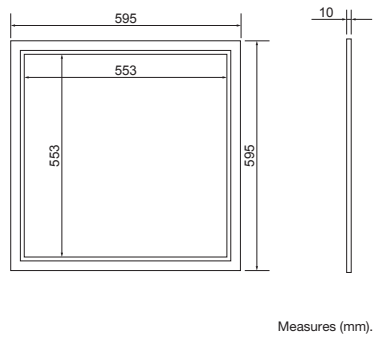

TRIPOLIS

PRO P6060UGR / P30120UGR / P60120UGR

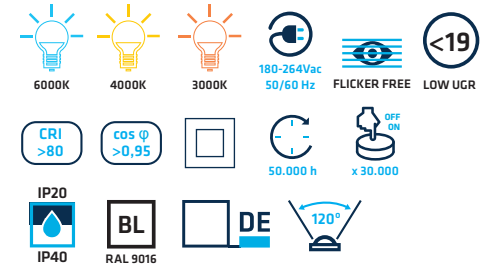

• Material

PS AL

DIFFUSER BODY

• Certif.

CE ENAC CB

• Dimming Options




0-10V DALI PUSH CASAMBI 0-10V Ref. MDRF

• Optional

UE DRIVER IP44 KE Ref. KEU2403V2 1-10V Ref. SL20 ON-OFF Ref. SP20

• Accessories

Ref. ASC60X60 Ref. ASM60X60V2 Ref. ASE60X60 Ref. AEM60X60 Ref. ASP60X60 Ref. AS60X60 Ref. ATP6060 Ref. CS2G

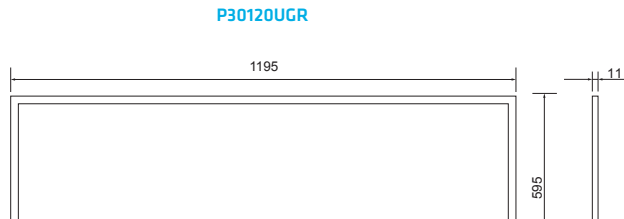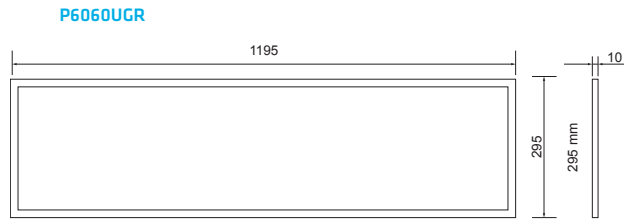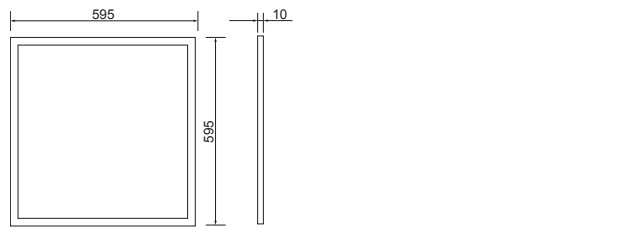

Measures (mm).

	K		W		
P6060UGR*BF	6000K	595x595x10 mm	40 W	5200 lm	4040 lm
P6060UGR*BN	4000K	595x595x10 mm	40 W	5120 lm	4010 lm
P6060UGR*BC	3000K	595x595x10 mm	40 W	4920 lm	3800 lm
P30120UGR*BF	6000K	1195x295x10 mm	40 W	5200 lm	4040 lm
P30120UGR*BN	4000K	1195x295x10 mm	40 W	5120 lm	4010 lm
P30120UGR*BC	3000K	1195x295x10 mm	40 W	4920 lm	3800 lm
P60120UGR*BF	6000K	1195x595x11 mm	50 W	6500 lm	5050 lm
P60120UGR*BN	4000K	1195x595x11 mm	50 W	6400 lm	5010 lm
P60120UGR*BC	3000K	1195x595x11 mm	50 W	6150 lm	4750 lm

* Dimming Opt.

DT 0-10V, DALI, PUSH D2 DALI / PUSH (● 4000K) CS CASAMBI

* Optional

UE UE DRIVER 44 IP44

MICROPOLIS

PRO P3030 / P3060



4000K



220-240Vac
50/60Hz



FLICKER FREE



5
YEARS
WARRANTY



CRI
>80



cos φ
>0,9





50.000 h



OFF
ON



IP20
IP40



BL
RAL 9003



DE



110°

• Material



PMMA
DIFFUSER



AL
BODY

• Dimming Options



0-10V



DALI



PUSH



CASAMBI



0-10V
Ref. MDRF

• Optional



UE DRIVER



IP44



KE
Ref. KEU603



1-10V
Ref. SL20



ON-OFF
Ref. SP20

• Accessories



Ref. ASM3030
Ref. ASE60X60



Ref. AEM3030
Ref. ASP60X60



Ref. ASE60X60



Ref. ATP3030



Ref. CS2G



Ref. ASM3060
Ref. ASE60X60



Ref. AEM3060
Ref. ASP60X60



Ref. ASE60X60



Ref. ATP3060

• Certif.




	K		W		
P3030*BN	4000K	295x295x10,7 mm	12 W	1200 lm	960 lm
P3060*BN	4000K	595x295x9,6 mm	18 W	1980 lm	1620 lm

* Dimming Opt.


DT 0-10V, DALI, PUSH CS CASAMBI

* Optional

UE UE DRIVER 44 IP44



P3030

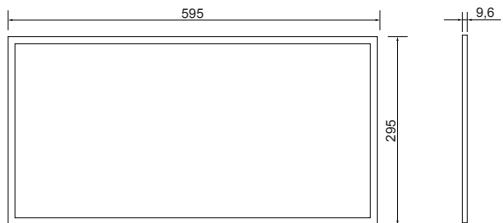

P3060

Measures (mm).

MICROPOLIS. ACCESSORIES / ACCESSOIRES

SURFACE MOUNTING / SURFACE

LED panel surface mounting frame.
Accessoire surface cadre.



ASM3030 (301 x 301 x 45 mm)
ASM3060 (301 x 601 x 45 mm)

LED panel surface mounting brackets.
Accessoire surface équerres.



ASE60X60 (4 units)

TRACK LIGHT / TRACKLIGHT

Track Light Accessories.
Accessoire Tracklight.



ATP3030 (2 units)
ATP3060 (2 units)

RECESSED MOUNTING / ENCASTRÉ

LED panel recessed mounting frame.
Accessoire encastré cadre.



AEM3030
AEM3060

LED panel recessed mounting clips.
Accessoire encastré pinces.



ASP60X60 (4 units)

SUSPENSION / SUSPENSION

LED panel suspension kit / Accessoire suspension



AS60X60 (4 units)

SECURITY / SÉCURITÉ

Security cable / Câble sécurité



CS2G (1 ud.)

MICROPOLIS ACCESSORIES 30x30 / 30x60



MICROPOLIS			
		P3030	P3060
	ASM3030	✓	✗
	ASM3060	✗	✓
	ASE60X60	✓	✓
	AEM3030	✓	✗
	AEM3060	✗	✓
	ASP60X60	✓	✓
	AS60X60	✓	✓
	ATP3030	✓	✗
	ATP3060	✗	✓
	CS2G	✓	✓

NEAPOLIS

PRO PBN2.

6000K

4000K

3000K

220-240Vac
50/60Hz

LOW UGR

CRI
>80

cos φ
>0,9

40.000 h

x 20.000

IP20

DE

BL
RAL 9003

90°

FLICKER FREE

• Material

PS

AL

DIFFUSER BODY

CE

• Dimming Options

0-10V

DALI

PUSH

CASAMBI

TRIAC

• Optional

EU DRIVER

KE
Ref. KEU603

0-10V
Ref. SL20

ON-OFF
Ref. SP20

• Accessories

Ref. ASM60X60V3

Ref. AEM60X60
Ref. AEP60X60V3

Ref. AS60X60V3

Ref. ATP6060

Ref. ASM30X120V3

Ref. AEM30X120
Ref. AEP120V3

Ref. AS120V3

Ref. ATP30120

Ref. ASM60X120V3

Ref. AEM60X120
Ref. AEP120V3

Ref. AS120V3

Ref. ATP60120

Ref. CS2G

	OPTIONS	K		W		
PBN2.6060U60	*	6000K	595x595x33 mm	40 W	4680 lm	3880 lm
PBN2.6060U40	*	4000K	595x595x33 mm	40 W	4680 lm	3880 lm
PBN2.6060U30	*	3000K	595x595x33 mm	40 W	4200 lm	3605 lm
PBN2.30120U60	*	6000K	1195x295x33 mm	40 W	4680 lm	3880 lm
PBN2.30120U40	*	4000K	1195x295x33 mm	40 W	4680 lm	3880 lm
PBN2.30120U30	*	3000K	1195x295x33 mm	40 W	4200 lm	3605 lm
PBN2.60120U60	*	6000K	1195x595x34 mm	58 W	6426 lm	5626 lm
PBN2.60120U40	*	4000K	1195x595x34 mm	58 W	6426 lm	5626 lm
PBN2.60120U30	*	3000K	1195x595x34 mm	58 W	5820 lm	5220 lm

★ Dimming Opt.

D1 0-10V

D2 DALI / PUSH

D5 CASAMBI

TC TRIAC

★ Optional

UE UE DRIVER

EXAPOLIS

ECO PBE2.

6000K

4000K

220-240Vac
50/60Hz

FLICKER FREE

CRI
>80

cos φ
>0,9

40.000 h

x 20.000

IP20

DE

BL
RAL 9003

110°

• Material

PS

AL

DIFFUSER BODY

• Accessories

Ref. ASM60X60V3

Ref. AEM60X60
Ref. AEP60X60V3

Ref. AS60X60V3

Ref. ATP6060

Ref. CS2G

NEW

BACKLIGHT

Driver Height (h): 30 mm


Measures (mm).

	K		W		
PBE2.606060	6000K	595x595x33 mm	40 W	4800 lm	4000 lm
PBE2.606040	4000K	595x595x33 mm	40 W	4800 lm	4000 lm

PANELS. ACCESSORIES / ACCESSOIRES.

SURFACE MOUNTING / SURFACE

LED panel surface mounting box.
Accessoire surface tiroir.



ASC60X60 (601 x 601 x 57 mm)
ASC30X120 (301 x 1205 x 57 mm)
ASC60X120 (601 x 1205 x 57 mm)

LED panel surface mounting brackets.
Accessoire surface équerres.



ASE60X60 (4 units)
ASE120 (6 units)

LED panel surface mounting frame.
Accessoire surface cadre.



ASM60X60V2 (600 x 600 x 45 mm)
ASM30X120V2 (300 x 1200 x 45 mm)
ASM60X120V2 (600 x 1200 x 45 mm)

LED panel surface mounting frame.
Accessoire surface cadre.



ASM60X60V3 (600 x 600 x 70 mm)
ASM30X120V3 (300 x 1200 x 70 mm)
ASM60X120V3 (600 x 1200 x 70 mm)

TRACK LIGHT/ TRACKLIGHT

Track Light Accessories.
Accessoire Tracklight.



ATP6060 (2 units)
ATP30120 (2 units)
ATP60120 (2 units)

RECESSED MOUNTING / ENCASTRÉ

LED panel recessed mounting frame.
Accessoire encastré cadre.



AEM60X60
AEM30X120
AEM60X120

LED panel recessed mounting clips.
Accessoire encastré pinces.



APE60X60 (4 units)
AEP120 (6 units)

LED panel recessed mounting clips.
Accessoire encastré pinces.



APE60X60V3 (4 units)
AEP120V3 (6 units)

SUSPENSION / SUSPENSION

LED panel suspension kit
Accessoire suspension.



AS60X60 (4 units)
AS120 (6 units)

LED panel suspension kit.
Accessoire suspension.



AS60X60V3 (4 units)
AS120V3 (6 units)

SECURITY / SICUREZZA

Security cable / Câble sécurité.



CS2G (1 ud.)

PANELES. ACCESSORIES / ACCESSOIRES.

60x60 PANELS ACCESORIES / ACCESSOIRES PANNEAUX 60x60

		SLIM PANELS		
		ACROPOLIS	METROPOLIS	TRIPOLIS
		P6060EUGR65	P60X60EUGR9	P6060UGR
	ASC60X60	✓	✓	✓
	ASM60X60V2	✗	✓	✓
	ASE60X60	✗	✓	✓
	AEM60X60	✓	✓	✓
	ASP60X60	✗	✓	✓
	AS60X60	✗	✓	✓
	ATP6060	✗	✓	✓
	CS2G	✗	✓	✓

		BACKLIGHT PANELS		
		ANNAPOLIS	NEAPOLIS	EXAPOLIS
		PBA6060U	PBN2.6060U	PBE2.6060
	ASM60X60V3	✓	✓	✓
	AEM60X60	✓	✓	✓
	AEP60X60V3	✓	✓	✓
	AS60X60V3	✓	✓	✓
	ATP6060	✓	✓	✓
	CS2G	✓	✓	✓

30x120 AND 60x120 PANELS ACCESORIES / ACCESSOIRES PANNEAUX 30x120 E 60x120

		SLIM PANELS	
		TRIPOLIS	
		P30120UGR	P60120UGR
	ASC30X120	✓	✗
	ASC60X120	✗	✓
	ASM30X120V2	✓	✗
	ASM60X120V2	✗	✓
	ASE120	✓	✓
	AEM30X120	✓	✗
	AEM60X120	✗	✓
	AEP120	✓	✓
	AS120	✓	✓
	ATP30120	✓	✗
	ATP60120	✗	✓
	CS2G	✓	✓

		BACKLIGHT PANELS		
		ANNAPOLIS	NEAPOLIS	
		PBA30120U	PBN2.30120U	PBN2.60120U
	ASM30X120V3	✓	✓	✗
	ASM60X120V3	✗	✗	✓
	AEM30X120	✓	✓	✗
	AEM60X120	✗	✗	✓
	AEP120V3	✓	✓	✓
	AS120V3	✓	✓	✓
	ATP30120	✓	✓	✗
	ATP60120	✗	✗	✓
	CS2G	✓	✓	✓