


Indoor Lighting / Éclairage Intérieur

Ceiling Lights

Plafonniers

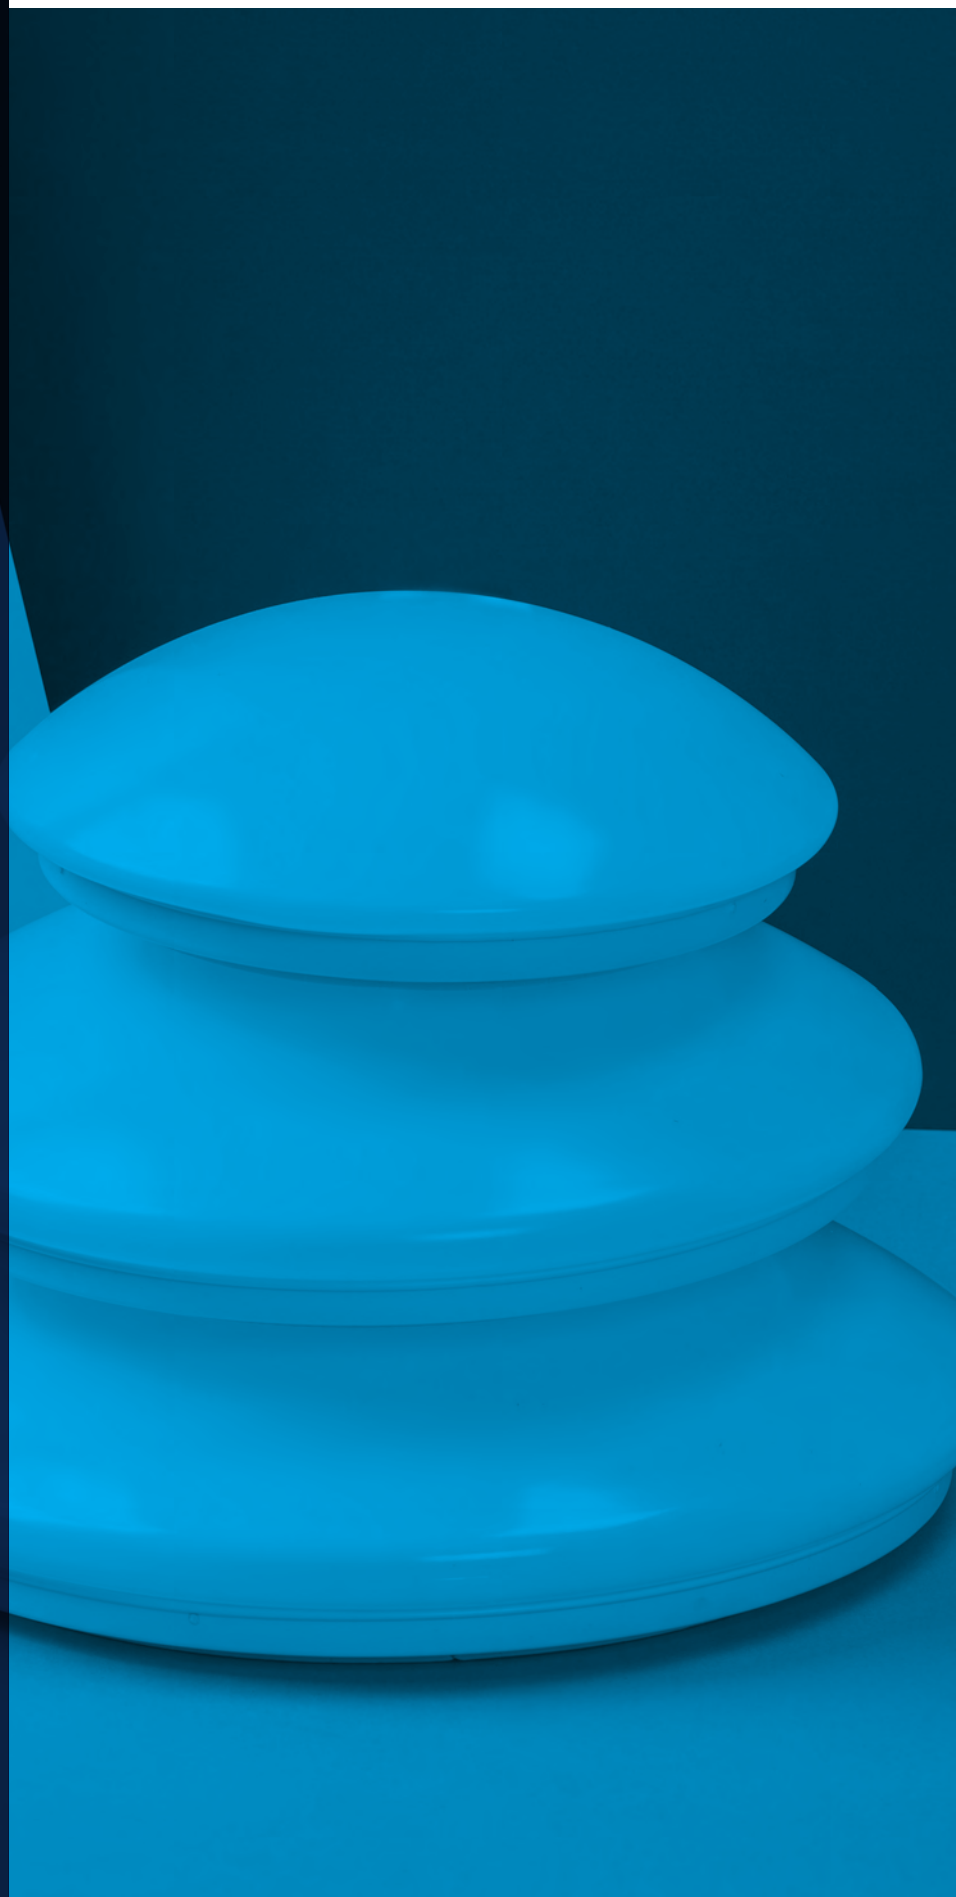

122

PRO SEREN SRN



CCT SWITCH



POWER SWITCH



DALI / PUSH



KE



NEW



NEW



124

PRO LUNA LNA



CCT SWITCH



POWER SWITCH



KE

126

PRO CEILING+ CEL



CCT SWITCH



KE



127

PRO TECTUM+ TCT



4000K



CCT SWITCH



POWER SWITCH

SEREN

PRO

SRN

CCT SWITCH

POWER SWITCH

220-240Vac
50/60Hz

FLICKER FREE

110°

CRI >80

cos φ >0,9

30.000 h

OFF ON
x 15.000

IP55

IK08

DI

BL
RAL 9016

• Material

• Certif.

PP
DIFFUSER
BODY

CE

• Dimming Opt.

• Optional

DALI
PUSH


KE
Ref. KES20SRN
ON-OFF

CCT SWITCH

POWER SWITCH



POLYVALENT

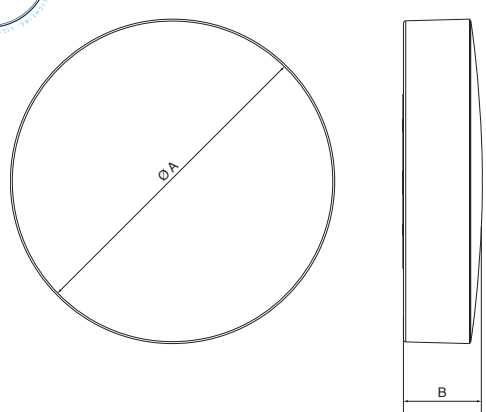

	A	B
SRN1318	280	68
SRN1724	360	72
SRN2232	410	76

Measures (mm).

	OPTIONS	W	CCT		
SRN1318CCT0	*	13 W	5700K	1745 lm	1485 lm
			4000K	1805 lm	1545 lm
			3000K	1615 lm	1420 lm
		18 W	5700K	2329 lm	1970 lm
			4000K	2409 lm	2050 lm
			3000K	2150 lm	1880 lm
SRN1724CCT0	*	17 W	5700K	2380 lm	2040 lm
			4000K	2465 lm	2125 lm
			3000K	2210 lm	1955 lm
		24 W	5700K	3240 lm	2760 lm
			4000K	3360 lm	2880 lm
			3000K	3000 lm	2640 lm
SRN2232CCT0	*	22 W	5700K	2970 lm	2530 lm
			4000K	3080 lm	2640 lm
			3000K	2750 lm	2420 lm
		32 W	5700K	4160 lm	3520 lm
			4000K	4320 lm	3680 lm
			3000K	3840 lm	3360 lm

★ Dimming Opt.

★ Optional

D2 DALI / PUSH

S1 Motion Sensor

E Emergency Kit

SEREN. ACCESSORIES / ACCESSOIRES.

ROTATING SURFACE / SURFACE ROTATIVE



ASR-SRN0

Rotating surface mounting accessory for SRN.
(Luminaire not included).

Accessoire surface rotative pour SRN.
(Luminaire non compris).



SUSPENSION / SUSPENSION



AS-SRN0

Suspension accessory for SRN.
(Luminaire not included).

Accessoire suspension pour SRN.
(Luminaire non compris).



TRACK LIGHT / TRACKLIGHT



ATR-SRN0

Track Light accessory for SRN.
(Luminaire not included).

Accessoire tracklight pour SRN.
(Luminaire non compris).



LUNA

PRO LNA

CCT SWITCH

POWER SWITCH

220-240Vac
50/60Hz

FLICKER FREE

110°

CRI >80

cos φ >0,9

50.000 h

OFF ON
x 20.000

IP66

IK10


DI

BL
RAL 9016

- Material
- PC + ABS
- Optional
- KE

• Certif.

CE

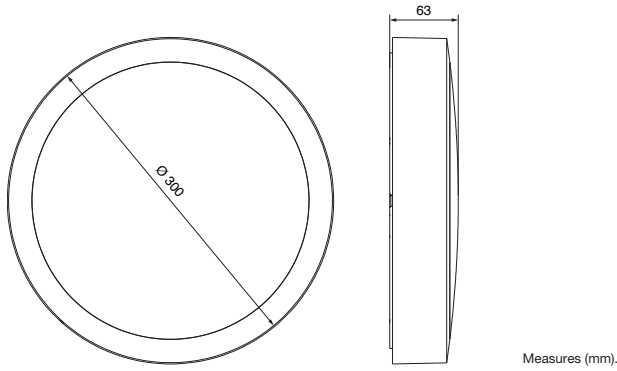

3000K

4000K

CCT SWITCH

22 W

15 W

78 W

POWER SWITCH

	OPTIONS	W	CCT		
LNA1522CCT0	★	15 W	 4000K	2300 lm	2000 lm
			 3000K	2075 lm	1850 lm
		18 W	 4000K	2760 lm	2400 lm
			 3000K	2520 lm	2250 lm
		22 W	 4000K	3240 lm	2800 lm
			 3000K	2980 lm	2650 lm
		★ Optional			
		Emergency Kit			

LUNA. ACCESSORIES / ACCESSOIRES.

BLACK FRAME / CADRE NOIR



AM2-LNA

Black frame for LNA.
(Luminaire not included).

Cadre noir pour LNA.
(Luminaire non compris).

NE

BLACK HALF-MOON FRAME / CADRE DEMI-LUNE



AML2-LNA

Black half-moon frame for LNA.
(Luminaire not included).

Cadre demi-lune noir pour LNA.
(Luminaire non compris).

NE

CEILING+

PRO

CEL

CCT SWITCH

220-240Vac
50/60Hz

FLICKER FREE

CRI >80

cos φ >0,9

50.000 h

OFF ON
x 15.000

IP64

DI

BL

120°

• Material

PMMA

Fe INOX

DIFFUSER

BODY

• Optional

KE

ON-OFF

• Certif.

CE

THREELINE

IP64

NEW COMPACT DESIGN

NOUVEAU CONCEPTION COMPACT

SP

KE

CCT SWITCH

	A	B
CEL12W	Ø 280 mm	80 mm
CEL18W	Ø 360 mm	92 mm
CEL32W	Ø 410 mm	103 mm

Ø A

B

3000K

5000K

4000K

CCT SWITCH

	OPTIONS	W	CCT		
CEL12CCT	*	12 W	5700K 4000K 3000K	1320 lm 1320 lm 1260 lm	1020 lm 1020 lm 960 lm
CEL18CCT	*	18 W	5700K 4000K 3000K	1980 lm 1980 lm 1890 lm	1530 lm 1530 lm 1440 lm
CEL32CCT	*	32 W	5700K 4000K 3000K	3680 lm 3680 lm 3360 lm	2720 lm 2720 lm 2560 lm
* Optional					
E Emergency Kit		S3 Motion Sensor		ES3 Emergency Kit + Motion Sensor	

TECTUM+

PRO

TCT

CCT SWITCH

POWER SWITCH

4000K

220-240Vac
50/60Hz

FLICKER FREE

CRI >80

cos φ >0,9

30.000 h

OFF ON
x 15.000

IP65

IK10

DI

BL

120°

• Material

PC

PC

DIFFUSER

BODY

• Certif.

CE

THREELINE

IP65

TCT1318

TCT24

280 mm

280 mm

300 mm

50 mm

50 mm

50 mm

TCT1318CCCT

TCT1318RCCT

TCT24HBN

3000K

5000K

4000K

CCT SWITCH

18 W

73 W

POWER SWITCH

	W	CCT		
TCT1318CCCT	13 W	5700K 4000K 3000K	1680 lm 1742 lm 1554 lm	1420 lm 1482 lm 1359 lm
TCT1318RCCT	18 W	5700K 4000K 3000K	2327 lm 2412 lm 2151 lm	1967 lm 2052 lm 1881 lm
TCT24HBN	24 W	4000K	2760 lm	2400 lm