


PLAIN RGBW

INCASSO RGBW Ø200

RECESSED RGBW Ø200

RGBW



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3200R/RCRCNB99	 STRETTO/15° NARROW/15°	12W with Algorithm	1650 lm	1420 lm	24 Vdc	III	67	10	
3200R/RCRCMB99	 MEDIO/24° MEDIUM/24°	12W with Algorithm	1650 lm	1420 lm	24 Vdc	III	67	10	
3200R/RCRCWB99	 LARGO/35° WIDE/35°	12W with Algorithm	1650 lm	1420 lm	24 Vdc	III	67	10	
3200R/RCRCW99	 MOLTO LARGO/60° SUPER WIDE/60°	12W with Algorithm	1650 lm	1420 lm	24 Vdc	III	67	10	

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM


DIMMERABILE - DIMMABLE

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO RGBW L. 200

RECESSED RGBW L. 200

RGBW



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3210R/RCRCNB99	 STRETTO/15° NARROW/15°	12W with Algorithm	1650 lm	1420 lm	24 Vdc	III	67	10	
3210R/RCRCMB99	 MEDIO/24° MEDIUM/24°	12W with Algorithm	1650 lm	1420 lm	24 Vdc	III	67	10	
3210R/RCRCWB99	 LARGO/35° WIDE/35°	12W with Algorithm	1650 lm	1420 lm	24 Vdc	III	67	10	
3210R/RCRCW99	 MOLTO LARGO/60° SUPER WIDE/60°	12W with Algorithm	1650 lm	1420 lm	24 Vdc	III	67	10	

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

DIMMERABILE - DIMMABLE

CARRABILE 2000 KG - DRIVEWAY 2000 KG

ACCESSORI

ACCESSORIES

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.CNT.001	TASTIERA RGBW 16DMX CH.12-24VDC RGBW CONTROLLER 16DMX CH.12-24VDC
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	E.CNT.002	TASTIERA RGBW 1024DMX CH. 5-15VDC RGBW CONTROLLER 1024DMX CH. 5-15VDC
E.TRA.579 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67	E.TRA.594	SPLITTER DMX-RDM 2 CANALI SPLITTER DMX-RDM 2 CHANNELS
E.TRA.592 1 DRIVER FOR 5-9 LAMPS	ALIMENTATORE ON/OFF ELG 240W 24VDC IP67 DRIVER ON/OFF ELG 240W 24VDC IP67		

ACCESSORI

ACCESSORIES

CONNETTORI

CONNECTORS



MOR685P/2V

Connettore IP68 5Poli/2Vie 5 x 2.5 mm²
Connector IP68 5Poles/2Ways 5 x 2.5 mm²
L 109 x Ø 31



MOR685P/3V

Connettore a Y IP68 5Poli/3Vie 5 x 2.5 mm²
Connector Y IP68 5Poles/3Ways 5 x 2.5 mm²
L 140 x W 72 x H 33

ALIMENTATORI 24Vdc

DRIVER 24Vdc



E.TRA.579

1 Driver for 1-4 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
L 140 x W 63 x H 32



E.TRA.592

1 Driver for 5-9 Lamps

Alimentatore ON/OFF ELG 240W 24Vdc IP67
Driver ON/OFF ELG 240W 24Vdc IP67
L 244 x W 71 x H 38

CENTRALINE RGBW

RGBW CONTROL UNITS



E.TRA.594

Splitter DMX-RDM 2 Canali
Splitter DMX-RDM 2 Channels
L 88 x W 54 x H 26

CONTROLLER TOUCH

TOUCH CONTROLLER




E.CNT.001

Tastiera RGBW 16DMX Ch.12-24Vdc
RGBW Controller 16DMX Ch.12-24Vdc
L 75 x W 29.5 x H 120



E.CNT.002

Tastiera RGBW 1024DMX Ch.5-15Vdc
RGBW Controller 1024DMX Ch.5-15Vdc
L 146 x W 10 x H 106

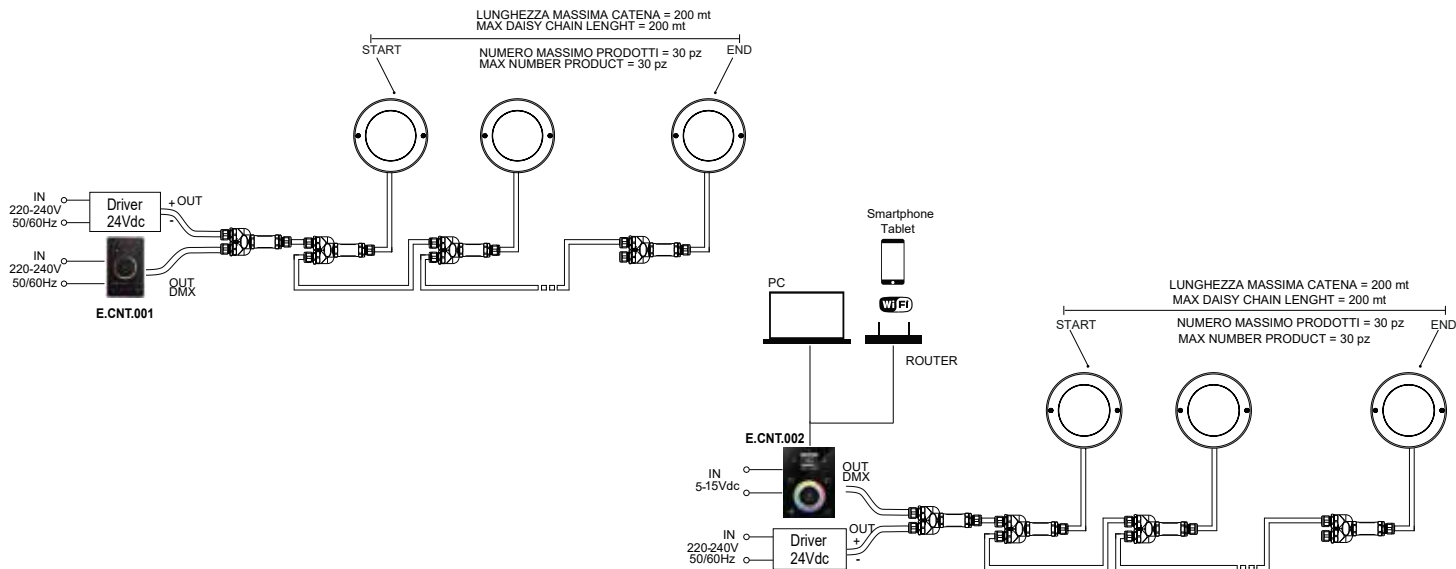




MATRIX RECESSED RGBW

INCASSO LINEARE RGBW L. 340

LINEAR RECESSED RGBW L. 340

RGBW



FORO / HOLE (LxH) 83x105x5mm

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2800R/RCRC.MB99	MEDIO/24° MEDIUM/24°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	67	09	RGBW
2800R/RCRC.O499	OVALE/40°X20° OVAL/40°X20°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	67	09	RGBW
2800R/RCRC.WB99	LARGO/35° WIDE/35°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	67	09	RGBW
2800R/RCRC.SW99	MOLTO LARGO/54° SUPER WIDE/54°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	67	09	RGBW

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM


DIMMERABILE - DIMMABLE

CALPESTATBILE 500 KG - WALKABLE 500KG

INCASSO LINEARE RGBW L. 620

LINEAR RECESSED RGBW L. 620

RGBW



FORO / HOLE (LxH) 83x105x5mm

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2801R/RCRC.MB99	MEDIO/24° MEDIUM/24°	24W with Algorithm	3300 lm	2840 lm	24Vdc	III	67	09	RGBW
2801R/RCRC.O499	OVALE/40°X20° OVAL/40°X20°	24W with Algorithm	3300 lm	2840 lm	24Vdc	III	67	09	RGBW
2801R/RCRC.WB99	LARGO/35° WIDE/35°	24W with Algorithm	3300 lm	2840 lm	24Vdc	III	67	09	RGBW
2801R/RCRC.SW99	MOLTO LARGO/54° SUPER WIDE/54°	24W with Algorithm	3300 lm	2840 lm	24Vdc	III	67	09	RGBW

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

CALPESTATBILE 500 KG - WALKABLE 500KG


ACCESSORI

ACCESSORIES

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.CNT.001	TASTIERA RGBW 16DMX CH.12-24VDC RGBW CONTROLLER 16DMX CH.12-24VDC
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	E.CNT.002	TASTIERA RGBW 1024DMX CH. 5-15VDC RGBW CONTROLLER 1024DMX CH. 5-15VDC
E.TRA.579	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67	E.TRA.594	SPLITTER DMX-RDM 2 CANALI SPLITTER DMX-RDM 2 CHANNELS
E.TRA.592	ALIMENTATORE ON/OFF ELG 240W 24VDC IP67 DRIVER ON/OFF ELG 240W 24VDC IP67		

INCASSO LINEARE RGBW L. 900**LINEAR RECESSED RGBW L. 900**

RGBW

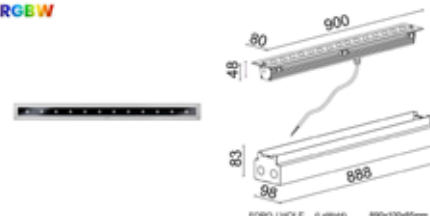

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2802R/RCRC.MB99	MEDIO/24° MEDIUM/24°	36W with Algorithm	4950 lm	4260 lm	24Vdc	III	67	09	RGBW
2802R/RCRC.O499	OVALE/40°X20° OVAL/40°X20°	36W with Algorithm	4950 lm	4260 lm	24Vdc	III	67	09	RGBW
2802R/RCRC.WB99	LARGO/35° WIDE/35°	36W with Algorithm	4950 lm	4260 lm	24Vdc	III	67	09	RGBW
2802R/RCRC.SW99	MOLTO LARGO/54° SUPER WIDE/54°	36W with Algorithm	4950 lm	4260 lm	24Vdc	III	67	09	RGBW


VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

CALPESTATBILE 500 KG - WALKABLE 500KG

INCASSO LINEARE RGBW L. 1180**LINEAR RECESSED RGBW L. 1180**

RGBW

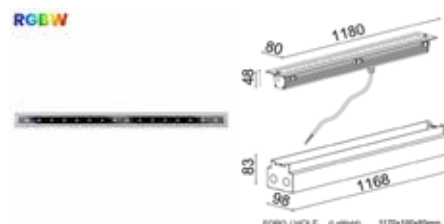

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2803R/RCRC.MB99	MEDIO/24° MEDIUM/24°	48W with Algorithm	6600 lm	5680 lm	24Vdc	III	67	09	RGBW
2803R/RCRC.O499	OVALE/40°X20° OVAL/40°X20°	48W with Algorithm	6600 lm	5680 lm	24Vdc	III	67	09	RGBW
2803R/RCRC.WB99	LARGO/35° WIDE/35°	48W with Algorithm	6600 lm	5680 lm	24Vdc	III	67	09	RGBW
2803R/RCRC.SW99	MOLTO LARGO/54° SUPER WIDE/54°	48W with Algorithm	6600 lm	5680 lm	24Vdc	III	67	09	RGBW

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

CALPESTATBILE 500 KG - WALKABLE 500KG

ACCESSORI**ACCESSORIES**

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.CNT.001	TASTIERA RGBW 16DMX CH. 12-24VDC RGBW CONTROLLER 16DMX CH. 12-24VDC
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	E.CNT.002	TASTIERA RGBW 1024DMX CH. 5-15VDC RGBW CONTROLLER 1024DMX CH. 5-15VDC
E.TRA.579	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67	E.TRA.594	SPLITTER DMX-RDM 2 CANALI SPLITTER DMX-RDM 2 CHANNELS
E.TRA.592	ALIMENTATORE ON/OFF ELG 240W 24VDC IP67 DRIVER ON/OFF ELG 240W 24VDC IP67		

ACCESSORI

ACCESSORIES

CONNETTORI

CONNECTORS



MOR685P/2V

Connettore IP68 5Poli/2Vie 5 x 2.5 mm²
Connector IP68 5Poles/2Ways 5 x 2.5 mm²
 L 109 x Ø 31



MOR685P/3V

Connettore a Y IP68 5Poli/3Vie 5 x 2.5 mm²
Connector Y IP68 5Poles/3Ways 5 x 2.5 mm²
 L 140 x W 72 x H 33

ALIMENTATORI 24Vdc

DRIVER 24Vdc



E.TRA.579

Cod. 2800R - 1 Driver for 1-4 Lamps
 Cod. 2801R - 1 Driver for 1-2 Lamps
 Cod. 2802R - 1 Driver for 1 Lamp
 Cod. 2803R - 1 Driver for 1 Lamp

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
 L 140 x W 63 x H 32



E.TRA.592

Cod. 2800R - 1 Driver for 5-9 Lamps
 Cod. 2801R - 1 Driver for 3-5 Lamps
 Cod. 2802R - 1 Driver for 2-3 Lamps
 Cod. 2803R - 1 Driver for 1 Lamps

Alimentatore ON/OFF ELG 240W 24Vdc IP67
Driver ON/OFF ELG 240W 24Vdc IP67
 L 244 x W 71 x H 38

CENTRALINE RGBW

RGBW CONTROL UNITS



E.TRA.594

Splitter DMX-RDM 2 Canali
Splitter DMX-RDM 2 Channels
 L 88 x W 54 x H 26

CONTROLLER TOUCH

TOUCH CONTROLLER




E.CNT.001

Tastiera RGBW 16DMX Ch. 12-24Vdc
RGBW Controller 16DMX Ch. 12-24Vdc
 L 75 x W 29.5 x H 120



E.CNT.002

Tastiera RGBW 1024DMX Ch. 5-15Vdc
RGBW Controller 1024DMX Ch. 5-15Vdc
 L 146 x W 10 x H 106

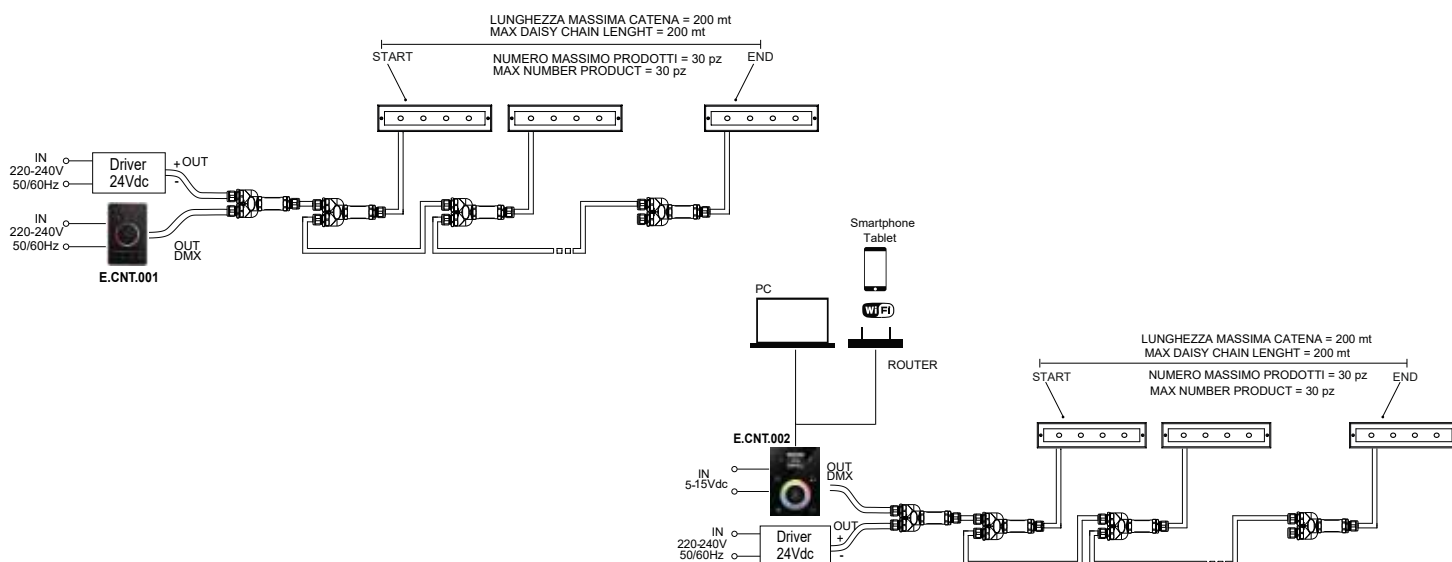

KUBO12-B RGBW

RGBW

PROIETTORE ORIENTABILE RGBW

24VDC

ADJUSTABLE FLOODLIGHT RGBW

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2112W/RCRC.NB	 STRETTO/10° NARROW/10°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	66	07	RGBW
2112W/RCRC.MB	 MEDIO/20° MEDIUM/20°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	66	07	RGBW
2112W/RCRC.WB	 LARGO/30° WIDE/30°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	66	07	RGBW
2112W/RCRC.SW	 MOLTO LARGO/60° SUPER WIDE/60°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	66	07	RGBW

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

AC2112	VISIERA ANTIABBAGLIAMENTO PER KUBO12 ANTI-GLARE VISOR FOR KUBO12	E.CNT.001	TASTIERA RGBW 16DMX CH. 12-24VDC RGBW CONTROLLER 16DMX CH. 12-24VDC
KIT.036	BRACCIO PER ESTENSIONE A PARETE EXTENSION ARM FOR WALL	E.CNT.002	TASTIERA RGBW 1024DMX CH. 5-15VDC RGBW CONTROLLER 1024DMX CH. 5-15VDC
E.TRA.579 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67	E.TRA.594	SPLITTER DMX-RDM 2 CANALI SPLITTER DMX-RDM 2 CHANNELS
E.TRA.592 1 DRIVER FOR 5-9 LAMPS	ALIMENTATORE ON/OFF ELG 240W 24VDC IP67 DRIVER ON/OFF ELG 240W 24VDC IP67		

ACCESSORI

ACCESSORIES

FISSAGGIO

FIXING



KIT.036
Braccio per estensione a parete
Extension arm for wall
L 500

VISIERE

VISORS



AC2112
Visiera antiabbagliamento per Kubo12
Anti-glare visor for Kubo12
L 125 x H 125

ALIMENTATORI 24Vdc

DRIVER 24Vdc



E.TRA.579
1 Driver for 1-4 Lamps
Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
L 140 x W 63 x H 32



E.TRA.592
1 Driver for 5-9 Lamps
Alimentatore ON/OFF ELG 240W 24Vdc IP67
Driver ON/OFF ELG 240W 24Vdc IP67
L 244 x W 71 x H 38

CENTRALINE RGBW

RGBW CONTROL UNITS



E.TRA.594
Splitter DMX-RDM 2 Canali
Splitter DMX-RDM 2 Channels
L 88 x W 54 x H 26

CONTROLLER TOUCH


TOUCH CONTROLLER



E.CNT.001
Tastiera RGBW 16DMX Ch.12-24Vdc
RGBW Controller 16DMX Ch.12-24Vdc
L 75 x W 29.5 x H 120



E.CNT.002
Tastiera RGBW 1024DMX Ch.5-15Vdc
RGBW Controller 1024DMX Ch.5-15Vdc
L 146 x W 10 x H 106

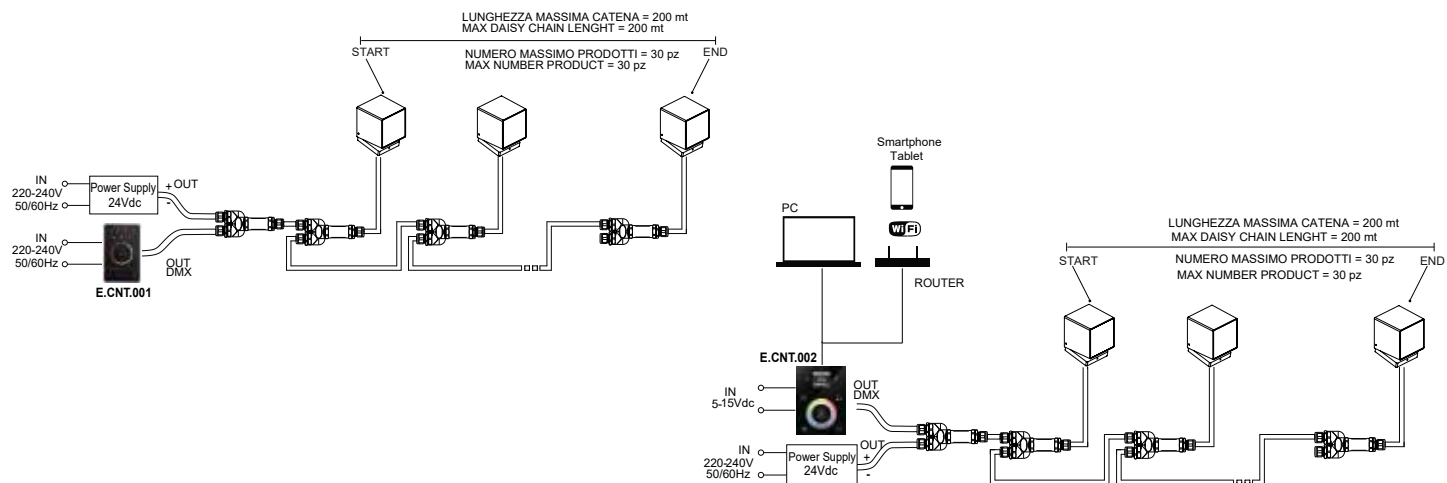

KUBO12-S RGBW


RGBW

PROIETTORE ORIENTABILE RGBW

24VDC

ADJUSTABLE FLOODLIGHT RGBW

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2113W/RCRCNB	STRETTO/10° NARROW/10°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	66	07	RGBW
2113W/RCRCMB	MEDIO/20° MEDIUM/20°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	66	07	RGBW
2113W/RCRCWB	LARGO/30° WIDE/30°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	66	07	RGBW
2113W/RCRCSW	MOLTO LARGO/60° SUPER WIDE/60°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	66	07	RGBW

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

AC2112	VISIERA ANTIABBAGLIAMENTO PER KUBO12 ANTI-GLARE VISOR FOR KUBO12	E.TRA.579 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
KIT.036	BRACCIO PER ESTENSIONE A PARETE EXTENSION ARM FOR WALL	E.TRA.592 1 DRIVER FOR 5-9 LAMPS	ALIMENTATORE ON/OFF ELG 240W 24VDC IP67 DRIVER ON/OFF ELG 240W 24VDC IP67
MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.CNT.001	TASTIERA RGBW 16DMX CH.12-24VDC RGBW CONTROLLER 16DMX CH.12-24VDC
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	E.CNT.002	TASTIERA RGBW 1024DMX CH.5-15VDC RGBW CONTROLLER 1024DMX CH.5-15VDC
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²	E.TRA.594	SPLITTER DMX-RDM 2 CANALI SPLITTER DMX-RDM 2 CHANNELS
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²		

ACCESSORI

ACCESSORIES

CONNETTORI

CONNECTORS



MOR685P/2V

Connettore IP68 5Poli/2Vie 5 x 2.5 mm²
Connector IP68 5Poles/2Ways 5 x 2.5 mm²
 L 109 x Ø 31



MOR685P/3V

Connettore a Y IP68 5Poli/3Vie 5 x 2.5 mm²
Connector Y IP68 5Poles/3Ways 5 x 2.5 mm²
 L 140 x W 72 x H 33



MOR685P/3VS

Scatola di connessione IP68 5Poli/3Vie 5 x 4 mm²
Connection Box IP68 5Poles/3Ways 5 x 4 mm²
 L 127 x W 93 x H 35



MOR685P/4VS

Scatola di connessione IP68 5Poli/4Vie 5 x 4 mm²
Connection Box IP68 5Poles/4Ways 5 x 4 mm²
 L 113 x W 93 x H 35

FISSAGGIO

FIXING



KIT.036

Braccio per estensione a parete
Extension arm for wall
 L 500

VISIERE

VISORS



AC2112

Visiera antiabbagliamento per Kubo12
Anti-glare visor for Kubo12
 L 125 x H 125

ALIMENTATORI 24Vdc

DRIVER 24Vdc



E.TRA.579

1 Driver for 1-4 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
 L 140 x W 63 x H 32



E.TRA.592

1 Driver for 5-9 Lamps

Alimentatore ON/OFF ELG 240W 24Vdc IP67
Driver ON/OFF ELG 240W 24Vdc IP67
 L 244 x W 71 x H 38

CENTRALINE RGBW

RGBW CONTROL UNITS



E.TRA.594

Splitter DMX-RDM 2 Canali
Splitter DMX-RDM 2 Channels
 L 88 x W 54 x H 26

CONTROLLER TOUCH

TOUCH CONTROLLER


E.CNT.001

Tastiera RGBW 16DMX Ch. 12-24Vdc

RGBW Controller 16DMX Ch. 12-24Vdc


L 75 x W 29.5 x H 120


E.CNT.002

Tastiera RGBW 1024DMX Ch. 5-15Vdc

RGBW Controller 1024DMX Ch. 5-15Vdc

L 146 x W 10 x H 106

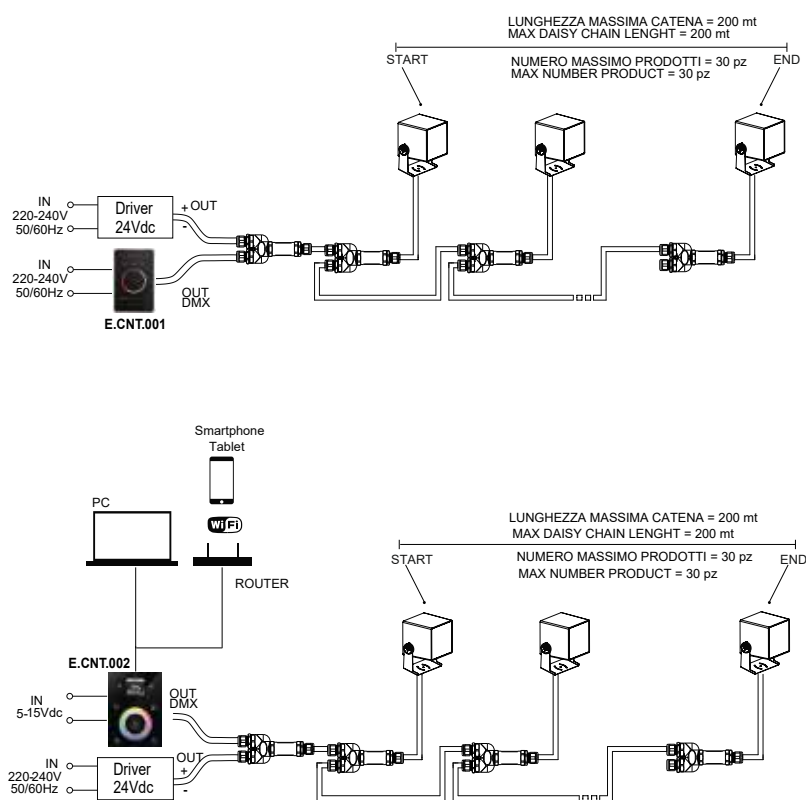

MATRIX FLOODLIGHT RGBW

PROIETTORE LINEARE RGBW L. 306

LINEAR FLOODLIGHT RGBW L. 306

RGBW



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2800P/RCRC.MB	 MEDIO/24° MEDIUM/24°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	67	07	RGBW
2800P/RCRC.WB	 LARGO/35° WIDE/35°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	67	07	RGBW
2800P/RCRC.SW	 MOLTO LARGO/54° SUPER WIDE/54°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	67	07	RGBW
2800P/RCRC.O4	 OVALE/40°X20° OVAL/40°X20°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	67	07	RGBW

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DIMMERABILE - DIMMABLE

PROIETTORE LINEARE RGBW L. 586

LINEAR FLOODLIGHT RGBW L. 586

RGBW



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2801P/RCRC.MB	 MEDIO/24° MEDIUM/24°	24W with Algorithm	3300 lm	2840 lm	24Vdc	III	67	07	RGBW
2801P/RCRC.WB	 LARGO/35° WIDE/35°	24W with Algorithm	3300 lm	2840 lm	24Vdc	III	67	07	RGBW
2801P/RCRC.SW	 MOLTO LARGO/54° SUPER WIDE/54°	24W with Algorithm	3300 lm	2840 lm	24Vdc	III	67	07	RGBW
2801P/RCRC.O4	 OVALE/40°X20° OVAL/40°X20°	24W with Algorithm	3300 lm	2840 lm	24Vdc	III	67	07	RGBW

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DIMMERABILE - DIMMABLE

ACCESSORI


ACCESSORIES

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.TRA.592	ALIMENTATORE ON/OFF ELG 240W 24VDC IP67 DRIVER ON/OFF ELG 240W 24VDC IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	E.CNT.001	TASTIERA RGBW 16DMX CH.12-24VDC RGBW CONTROLLER 16DMX CH.12-24VDC
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²	E.CNT.002	TASTIERA RGBW 1024DMX CH. 5-15VDC RGBW CONTROLLER 1024DMX CH. 5-15VDC
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²	E.TRA.594	SPLITTER DMX-RDM 2 CANALI SPLITTER DMX-RDM 2 CHANNELS
E.TRA.579	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67		

PROIETTORE LINEARE RGBW L. 866

LINEAR FLOODLIGHT RGBW L. 866

RGBW



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2802P/RCRC.MB	MEDIO/24° MEDIUM/24°	36W with Algorithm	4950 lm	4260 lm	24Vdc	III	67	07	RGBW
2802P/RCRC.WB	LARGO/35° WIDE/35°	36W with Algorithm	4950 lm	4260 lm	24Vdc	III	67	07	RGBW
2802P/RCRC.SW	MOLTO LARGO/54° SUPER WIDE/54°	36W with Algorithm	4950 lm	4260 lm	24Vdc	III	67	07	RGBW
2802P/RCRC.O4	OVALE/40°X20° OVAL/40°X20°	36W with Algorithm	4950 lm	4260 lm	24Vdc	III	67	07	RGBW


VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DIMMERABILE - DIMMABLE

PROIETTORE LINEARE RGBW L.1146

LINEAR FLOODLIGHT RGBW L.1146

RGBW



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2803P/RCRC.MB	MEDIO/24° MEDIUM/24°	48W with Algorithm	6600 lm	5680 lm	24Vdc	III	67	07	RGBW
2803P/RCRC.WB	LARGO/35° WIDE/35°	48W with Algorithm	6600 lm	5680 lm	24Vdc	III	67	07	RGBW
2803P/RCRC.SW	MOLTO LARGO/54° SUPER WIDE/54°	48W with Algorithm	6600 lm	5680 lm	24Vdc	III	67	07	RGBW
2803P/RCRC.O4	OVALE/40°X20° OVAL/40°X20°	48W with Algorithm	6600 lm	5680 lm	24Vdc	III	67	07	RGBW

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.TRA.592	ALIMENTATORE ON/OFF ELG 240W 24VDC IP67 DRIVER ON/OFF ELG 240W 24VDC IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	E.CNT.001	TASTIERA RGBW 16DMX CH. 12-24VDC RGBW CONTROLLER 16DMX CH. 12-24VDC
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²	E.CNT.002	TASTIERA RGBW 1024DMX CH. 5-15VDC RGBW CONTROLLER 1024DMX CH. 5-15VDC
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²	E.TRA.594	SPLITTER DMX-RDM 2 CANALI SPLITTER DMX-RDM 2 CHANNELS
E.TRA.579	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67		

ACCESSORI

ACCESSORIES

CONNETTORI

CONNECTORS



MOR685P/2V

Connettore IP68 5Poli/2Vie 5 x 2.5 mm²
Connector IP68 5Poles/2Ways 5 x 2.5 mm²
 L 109 x Ø 31



MOR685P/3V

Connettore a Y IP68 5Poli/3Vie 5 x 2.5 mm²
Connector Y IP68 5Poles/3Ways 5 x 2.5 mm²
 L 140 x W 72 x H 33



MOR685P/3VS

Scatola di connessione IP68 5Poli/3Vie 5 x 4 mm²
Connection Box IP68 5Poles/3Ways 5 x 4 mm²
 L 127 x W 93 x H 35



MOR685P/4VS

Scatola di connessione IP68 5Poli/4Vie 5 x 4 mm²
Connection Box IP68 5Poles/4Ways 5 x 4 mm²
 L 113 x W 93 x H 35

ALIMENTATORI 24Vdc

DRIVER 24Vdc



E.TRA.579

Cod. 2800P - 1 Driver for 1-4 Lamps
 Cod. 2801P - 1 Driver for 1-2 Lamps
 Cod. 2802P - 1 Driver for 1 Lamp
 Cod. 2803P - 1 Driver for 1 Lamp

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
 L 140 x W 63 x H 32



E.TRA.592

Cod. 2800P - 1 Driver for 5-9 Lamps
 Cod. 2801P - 1 Driver for 3-5 Lamps
 Cod. 2802P - 1 Driver for 2-3 Lamps
 Cod. 2803P - 1 Driver for 1 Lamp

Alimentatore ON/OFF ELG 240W 24Vdc IP67
Driver ON/OFF ELG 240W 24Vdc IP67
 L 244 x W 71 x H 38

CENTRALINE RGBW

RGBW CONTROL UNITS



E.TRA.594

Splitter DMX-RDM 2 Canali
Splitter DMX-RDM 2 Channels
 L 88 x W 54 x H 26

CONTROLLER TOUCH

TOUCH CONTROLLER





E.CNT.001

Tastiera RGBW 16DMX Ch.12-24Vdc
RGBW Controller 16DMX Ch.12-24Vdc
 L 75 x W 29.5 x H 120



E.CNT.002

Tastiera RGBW 1024DMX Ch.5-15Vdc
RGBW Controller 1024DMX Ch.5-15Vdc
 L 146 x W 10 x H 106

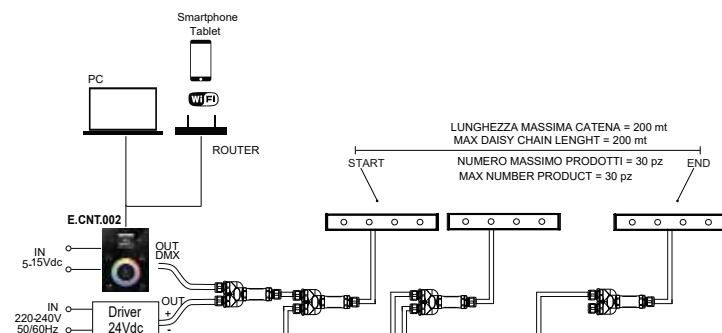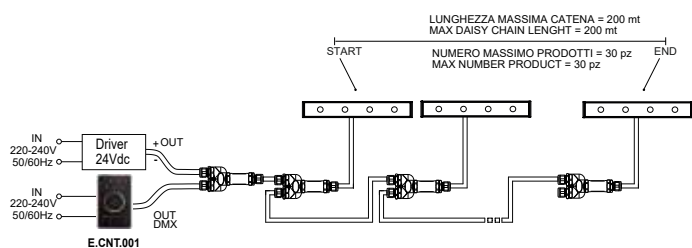

NEON STRIP RGBW

STRISCIA LUMINOSA RGBW

NEON STRIP RGBW



CODICE CODE	FASCIO BEAM	WATT	CCT CCT	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
AG205RGBW5000	 DIFFUSO DIFFUSED	14W/m	RGBW 3000K	240 lm/m	24Vdc	III	67	07	>80

SILICONE - SILICONE

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

KIT.NS205.004	END CAP CLOSE END CAP CLOSE	KIT.035.RGBW	KIT CASAMBI IP68 24V PWM 4CH KIT CASAMBI IP68 24V PWM 4CH
KIT.NS205.005	CLIP IN PLASTICA PLASTIC CLIP	E.TRA.579 MAX 5 M	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
KIT.NS205.006	STAFFA BRACKET	E.TRA.592 MAX 10 M	ALIMENTATORE ON/OFF ELG 240W 24VDC IP67 DRIVER ON/OFF ELG 240W 24VDC IP67
KIT.NS205.009	PROFILO IN ALLUMINIO ALUMINIUM PROFILE	E.TRA.594	SPLITTER DMX-RDM 2 CANALI SPLITTER DMX-RDM 2 CHANNELS
KIT.NS205.008	PROFILO PIEGHEVOLE FOLDING PROFILE	E.CEN.001 MAX 20 M	CENTRALINA RGBW DMX 4CH 12/24VDC RGBW CONTROL UNIT DMX 4CH 12/24VDC
KIT.030	COLLA PER NEON STRIP GLUE FOR NEON STRIP	E.CNT.001	TASTIERA RGBW 16DMX CH. 12-24VDC RGBW CONTROLLER 16DMX CH. 12-24VDC

