
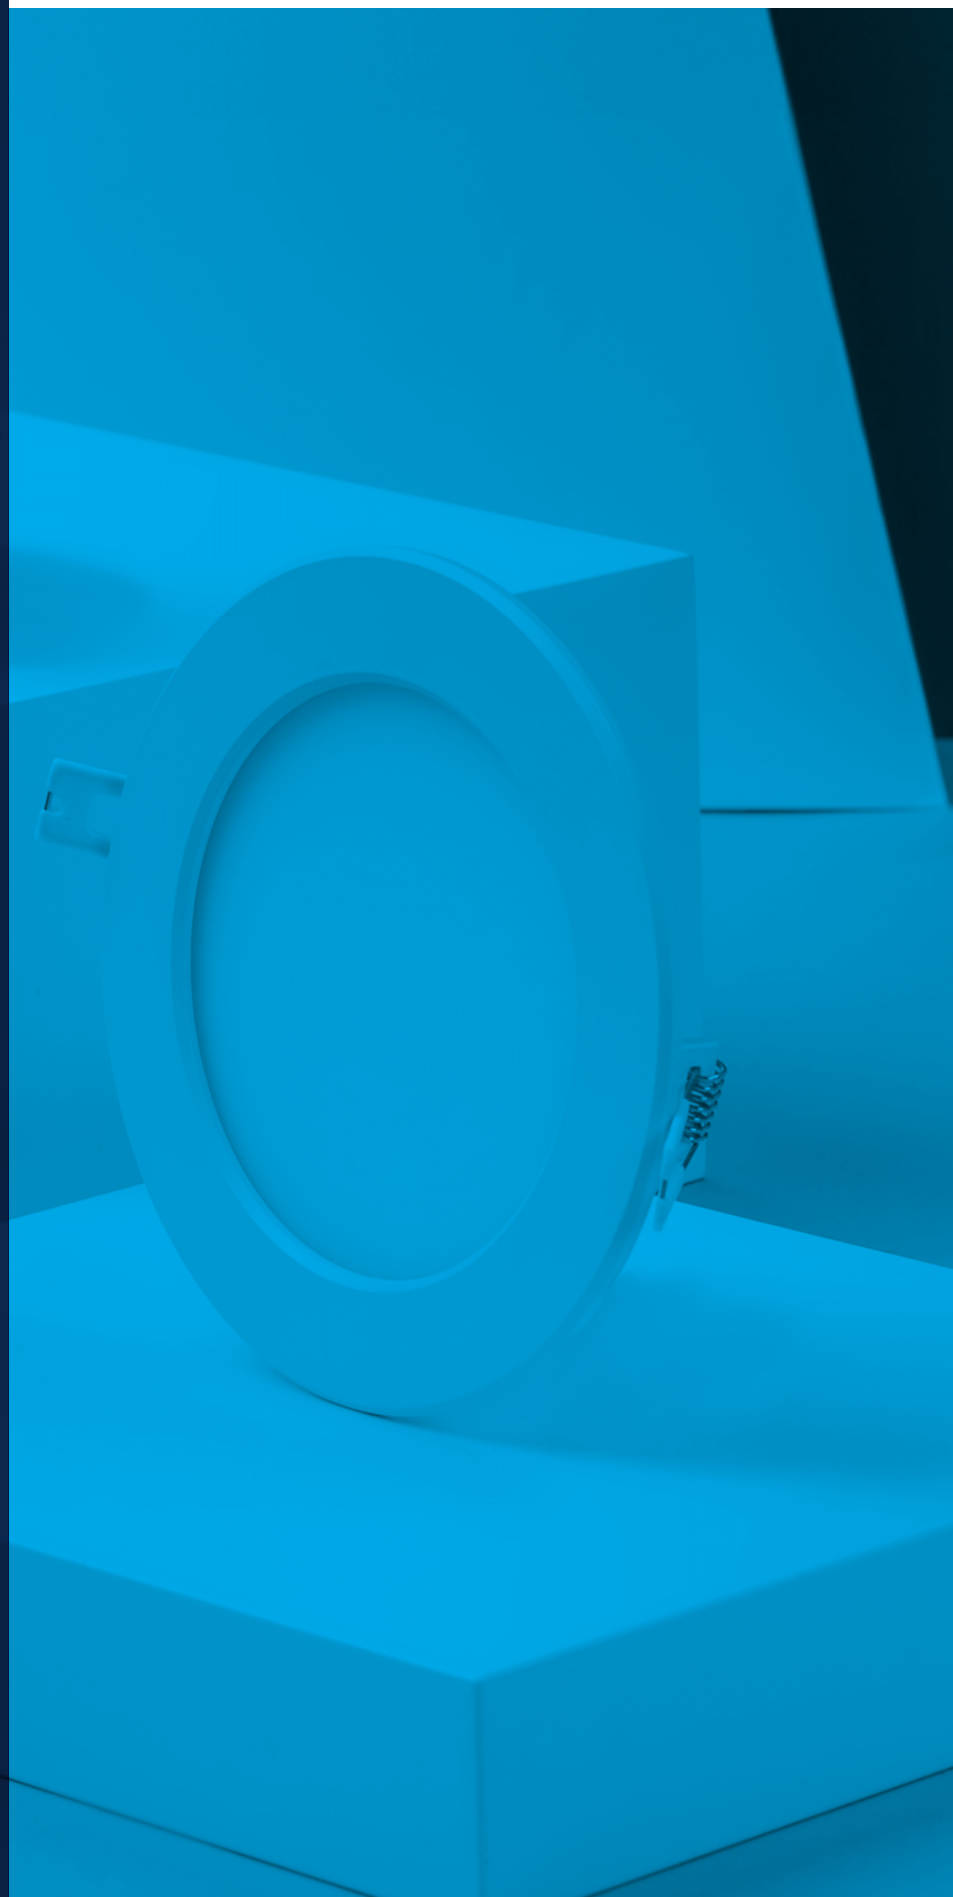


Indoor Lighting / Éclairage Intérieur

Downlight

Downlight

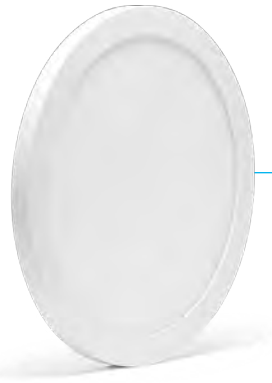

DOWNLIGHT DOWNLIGHT	SPOTLIGHT SPOTLIGHT	PANELS Panneaux	LINEAR PROFILES Linéaires	CEILING LIGHTS Plafonniers	TRACK LIGHT Spots sur rail
48 ARIZONA DLA CCT SWITCH LOW UGR 				60 NEVADA+ ND CCT SWITCH 	
50 INDIANA DLI IP65 5 YEARS WARRANTY 				62 UTAH DLU CCT SWITCH CRI>90 	
51 BOSTON DLB IP20 IP64 SMART CCT CRI>90 				63 MONTANA DLM IP20 IP44 CCT SWITCH 	
54 OREGON+ DLO CCT SWITCH CRI>90 5 YEARS WARRANTY 				64 NEBRASKA DLN FLICKER FREE CCT SWITCH 	
56 CALIFORNIA+ OFD CCT SWITCH LOW UGR 5 YEARS WARRANTY 				66 MISURI MSR FLICKER FREE 	
57 ALASKA DL25 IP20 IP65 LOW UGR 5 YEARS WARRANTY 				67 MICHIGAN DG FLICKER FREE 	
58 DELAWARE DL IP20 IP44 CRI>90 5 YEARS WARRANTY 					

ARIZONA

PREMIUM

DLA

CCT SWITCH

220-240Vac
50/60Hz

FLICKER FREE

60°

<19

CRI >80

COS φ >0,9

50.000 h

OFF ON

x 10.000

IP54

DE

BL

NE

5 YEARS WARRANTY

• Material

PC

PC

AL

DIFFUSER

REFLECTOR

BODY

• Dimming Options

0-10V

DALI

PUSH

• Accessories

SURFACE

SUSPENSION

TRIM RING
ENJOLIVEUR

ADLA

ASDLA + ADLA

Ref. AE / ANE

x30

x20

x16

x12

DLA10

DLA15
DLA20

DLA24

DLA35

• Certif.

CE

• Optional

UE DRIVER

Ref. KEU603

ON-OFF
Ref. SP20

0-10V
Ref. SL20

150 actual lm/W

150 lm/W réels

THREELINE

150 lm/W

THREELINE

Ø A

B

Ø C

	A	B	C
DLA10UCCT	110	55	90 ~ 100
DLA15UCCT	145	70	120 ~ 135
DLA20UCCT	165	75	135 ~ 155
DLA24UCCT	194	80	160 ~ 180
DLA35UCCT	230	90	195 ~ 220

Measures (mm).

CCT SWITCH

3000K

4000K

5000K

	OPTIONS	W	CCT		
DLA10UCCT0	★	10 W	5700K	1580 lm	1380 lm
DLA10UCCT2	★		4000K	1700 lm	1500 lm
DLA15UCCT0	★	15 W	5700K	2550 lm	2250 lm
DLA15UCCT2	★		4000K	2670 lm	2370 lm
DLA20UCCT0	★	20 W	5700K	3360 lm	2960 lm
DLA20UCCT2	★		4000K	3520 lm	3120 lm
DLA24UCCT0	★	24 W	5700K	4392 lm	3912 lm
DLA24UCCT2	★		4000K	4512 lm	4032 lm
DLA35UCCT0	★	35 W	5700K	6265 lm	5565 lm
DLA35UCCT2	★		4000K	6510 lm	5810 lm
	★		3000K	5635 lm	5110 lm

★ Dimming Opt.

D1 0-10V

D2 DALI / PUSH

★ Optional

UE UE DRIVER

DOWNLIGHT
DOWNLIGHT

SPOTLIGHT
SPOTLIGHT

PANELS
PANNEAUX

LINEAR PROFILES
LINÉAIRES

CEILING LIGHTS
PLAFONNIERS

TRACK LIGHT
SPOTS SUR RAIL

ARIZONA. ACCESSORIES / ACCESSOIRES.

SURFACE MOUNTING / SURFACE

Surface mounting accessory for DLA. (Luminaire not included).
Accessoire surface pour DLA. (Luminaire non compris).

		W
ADLA10S0	□	10 W
ADLA10S2	■	
ADLA15S0	□	15 W
ADLA15S2	■	
ADLA20S0	□	20 W
ADLA20S2	■	
ADLA24S0	□	24 W
ADLA24S2	■	

SUSPENSION / SUSPENSION

Suspension accessory for DLA. (Luminaire not included).
Accessoire suspension pour DLA. (Luminaire non compris).

		W
ASDLA0 + ADLA10S0	□	10 W
ASDLA2 + ADLA10S2	■	
ASDLA0 + ADLA15S0	□	15 W
ASDLA2 + ADLA15S2	■	
ASDLA0 + ADLA20S0	□	20 W
ASDLA2 + ADLA20S2	■	
ASDLA0 + ADLA24S0	□	24 W
ASDLA2 + ADLA24S2	■	

48

THREELINE

ThreelineGroup.com

ThreelineGroup.com

THREELINE

49

INDOOR / INTÉRIEUR

BOSTON

PREMIUM

DLB

5700K

4000K

3000K

200-264Vac

50/60Hz

FLICKER FREE

LOW UGR

CRI>90

COS φ >0,9

50.000 h

x 25.000

IP20

IP64

RAL 9016

5 YEARS WARRANTY

DE

BL

PC OPAL

AL

AL

DIFFUSER

BODY

REFLECTOR

• Material

• Dimming Options

• Optional

• Certif.

• Accessories

• Rings / Anneaux

THREELINE

UGR<19

Ø A

B

Ø C

	A	B	C
DLB10	114	66	90 ~ 102
DLB20	174	87	145 ~ 155
DLB28 / DLB35 / DLB45	232	110	195 ~ 210

Measures (mm).

WHITE
BLANC

BLACK
NOIR

BLACK
NOIR

CUSTOM

Ref. AC0-DLB

Ref. AR2-DLB

Ref. AC2-DLB

x40

x30

x12

DLB10

DLB20

DLB28
DLB35
DLB45

	OPTIONS	W	K		
DLB10C957	*	10 W	5700K	1150 lm	900 lm
DLB10C940	*	10 W	4000K	1150 lm	900 lm
DLB10C930	*	10 W	3000K	1100 lm	850 lm
DLB20C957	*	20 W	5700K	2300 lm	1800 lm
DLB20C940	*	20 W	4000K	2300 lm	1800 lm
DLB20C930	*	20 W	3000K	2200 lm	1700 lm
DLB28C957	*	28 W	5700K	3220 lm	2520 lm
DLB28C940	*	28 W	4000K	3220 lm	2520 lm
DLB28C930	*	28 W	3000K	3080 lm	2380 lm
DLB35C957	*	35 W	5700K	4025 lm	3150 lm
DLB35C940	*	35 W	4000K	4025 lm	3150 lm
DLB35C930	*	35 W	3000K	3850 lm	2975 lm
DLB45C957	*	45 W	5700K	5175 lm	4050 lm
DLB45C940	*	45 W	4000K	5175 lm	4050 lm
DLB45C930	*	45 W	3000K	4950 lm	3825 lm

* Dimming Opt.

DT 0-10V, DALI, PUSH D5 CASAMBI

* Optional

UE UE DRIVER

BOSTON. ACCESSORIES / ACCESSOIRES.

SURFACE MOUNTING / SURFACE

Surface mounting accessory for DLB. (Luminaire not included).

Accessoire de surface pour DLB. (Luminaire non compris).



		W
	☐	10 W
	☒	20 W
ASR0-DLB150	☐	28 W
ASR2-DLB150	☒	35 W
ASR0-DLB205	☐	45 W
ASR2-DLB205	☒	

BOSTON. RINGS / ANNEAUX



		W
AR2-DLB100	☒	10 W
AR2-DLB150	☒	20 W
	☐	28 W
AR2-DLB205	☒	35 W
	☐	45 W



		W
AC0-DLB100	☐	10 W
AC2-DLB100	☒	
AC0-DLB150	☐	20 W
AC2-DLB150	☒	
AC0-DLB205	☐	28 W
AC2-DLB205	☒	35 W
	☐	45 W

OREGON+

PREMIUM DLO40R / DLO60R

CCT SWITCH

220-240Vac
50/60Hz

FLICKER FREE

60°

CRI > 90

cos φ
> 0,95

□

50.000 h

x 20.000

IP20

DE

BL

5
YEARS
WARRANTY

• Material

DLO40R

DLO60R

Mg

AL

V

AL

BODY

BODY

DIFFUSER

REFLECTOR

• Dimming Options

0-10V

PUSH

DALI

CASAMBI

DLO40R

DLO60R

0-10V/DA

Ref. CSB110DA

• Optional

UE DRIVER

KE

Ref. KEU2403V2

1-10V

Ref. SL20

ON-OFF

Ref. SP20

CUSTOM

• Accessories

TRIM RING

ENJOLIVEUR

Ref. AE / ANE

• Certif.

CE

x6

DLO40


DLO60

3000K


4000K

5000K

CCT SWITCH

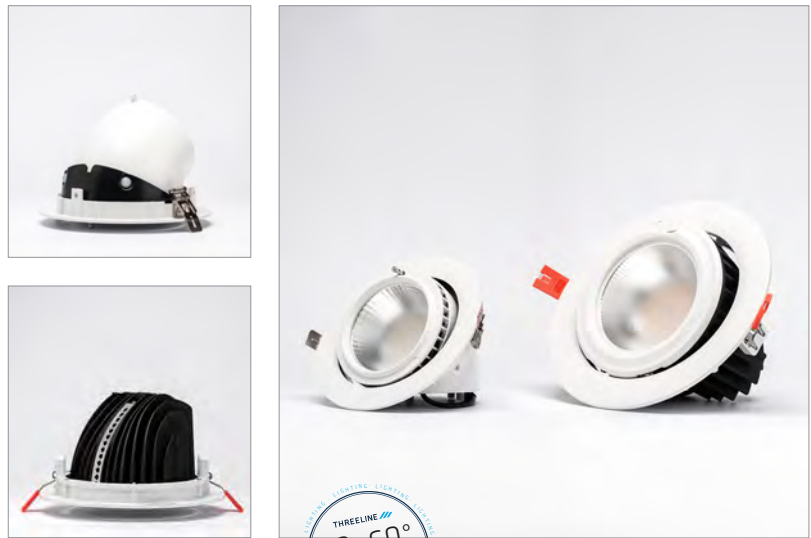

Orientable: 0~60°
Rotation: 360°

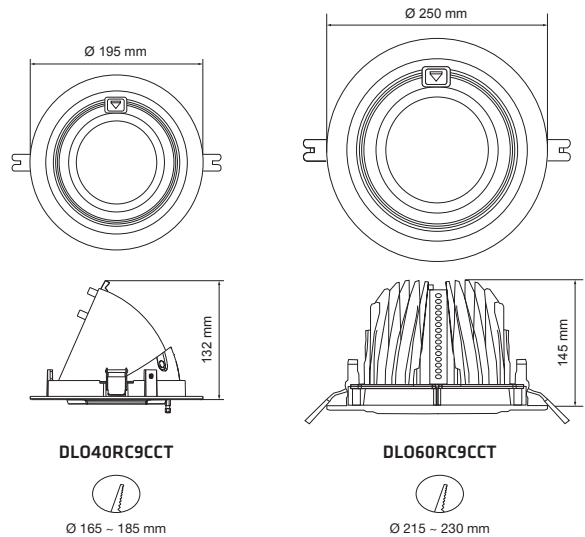

IIIIII	OPTIONS	W	CCT	5322 lm	4522 lm
DLO40RC9CCT	*	38 W	5700K 4000K 3000K	5322 lm 4585 lm	4522 lm 3785 lm
DLO60RC9CCT	*	60 W	5700K 4000K 3000K	6767 lm 6767 lm 6460 lm	5567 lm 5567 lm 5260 lm

* Dimming Opt.

D1 0-10V, PUSH
D2 DALI, PUSH
D5 CASAMBI

D1 0-10V, PUSH
D2 DALI

DLO60R

DLO40R

* Optional

UE UE DRIVER

OREGON+

PREMIUM DLO40C / DLO60C

CCT SWITCH

220-240Vac
50/60Hz

FLICKER FREE

100°

CRI > 90

cos φ
> 0,95

□

30.000 h

x 10.000

IP20

DE

BL

5
YEARS
WARRANTY

• Material

V

AL

PC

DIFFUSER

BODY

REFLECTOR

• Dimming Options

0-10V

PUSH

DALI

CASAMBI

DLO40C

DLO60C

0-10V/DA

Ref. CSB110DA

• Optional

UE DRIVER

KE

Ref. KEU2403V2

1-10V

Ref. SL20

ON-OFF

Ref. SP20

CUSTOM

• Accessories

TRIM RING

ENJOLIVEUR

Ref. AE / ANE

• Certif.

CE


x6

DLO40

DLO60



Orientable: 0~60°
Rotation: 360°

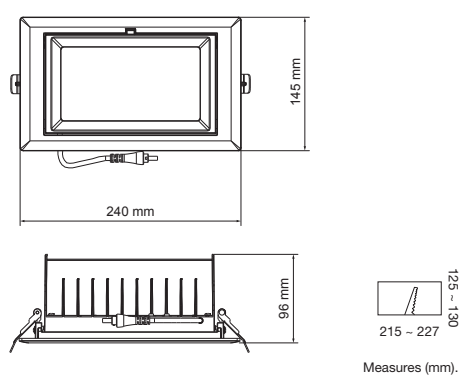

3000K

4000K

5000K

CCT SWITCH

IIIIII	OPTIONS	W	CCT	4616 lm	3816 lm
DLO40CC9CCT	*	38 W	5700K 4000K 3000K	4616 lm 4093 lm	3816 lm 3293 lm
DLO60CC9CCT	*	60 W	5700K 4000K 3000K	7700 lm 7700 lm 6831 lm	6500 lm 6500 lm 5631 lm

* Dimming Opt.

D1 0-10V, PUSH
D2 DALI, PUSH
D5 CASAMBI

DLO40C

* Optional

UE UE DRIVER

CALIFORNIA+

PRO OFD

CCT SWITCH

200-264Vac
50/60Hz

FLICKER FREE

60°

<19

CRI >80

COS Φ >0,95

50.000 h

OFF ON
x 25.000

IP20

DE

BL

5 YEARS WARRANTY

• Material

PC
OPAL
DIFFUSER

AL
BODY

AL
REFLECTOR

• Dimming Options

0-10V

PUSH

DALI

CASAMBI

• Optional

UE DRIVER

KE
Ref. KEU603

1-10V
Ref. SL20

ON-OFF
Ref. SP20

• Accessories

TRIM RING
ENJOLIVEUR

Ref. AE / ANE

• Certif.

CE

x40
OFD10



x30
OFD20

x12
OFD28

2700K 4000K 6000K

CCT SWITCH

IIII	OPTIONS	W	CCT	N	☀
OFD10UCCT	★	10 W	● 6000K	1150 lm	950 lm
			● 4000K	1150 lm	950 lm
			● 2700K	1000 lm	850 lm
OFD20UCCT	★	20 W	● 6000K	2400 lm	2000 lm
			● 4000K	2400 lm	2000 lm
			● 2700K	2100 lm	1800 lm
OFD28UCCT	★	28 W	● 6000K	3360 lm	2800 lm
			● 4000K	3360 lm	2800 lm
			● 2700K	2940 lm	2520 lm
★ Dimming Opt.			★ Optional		
DT 0-10V, DALI, PUSH			D5 CASAMBI		
			UE UE DRIVER		

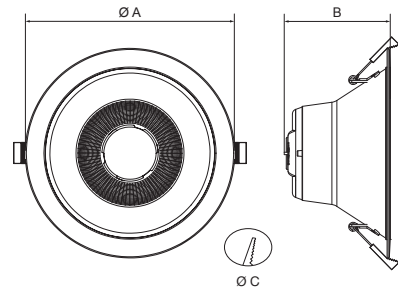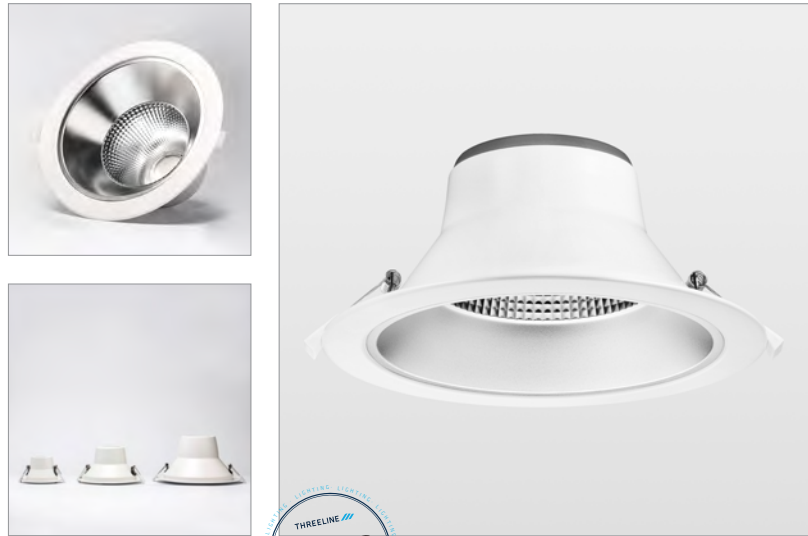

	A	B	C
OFD10UCCT	113	69	87 ~ 105
OFD20UCCT	174	89	145 ~ 165
OFD28UCCT	232	113	190 ~ 225

Measures (mm).

ALASKA

PRO DL25

6500K

4000K

3000K

198-264Vac
50/60Hz

FLICKER FREE

<19

CRI >80

COS Φ >0,95

50.000 h

OFF ON
x 30.000

100°

IP20

DE

BL

5 YEARS WARRANTY

• Material

PC
OPAL
DIFFUSER

PC
BODY

• Certif.



• Dimming Options

0-10V

PUSH

DALI

CASAMBI

• Optional

UE DRIVER

KE
Ref. KEU603

1-10V
Ref. SL20


ON-OFF
Ref. SP20

• Accessories

TRIM RING
ENJOLIVEUR

Ref. AE / ANE

x8

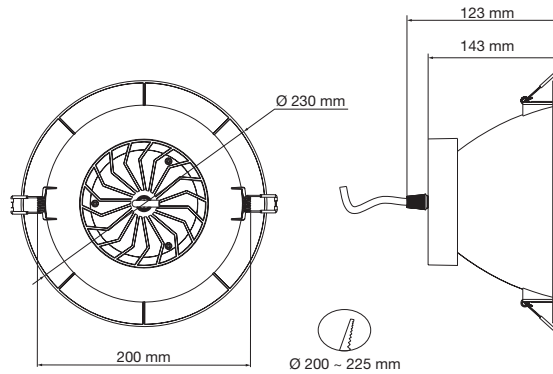

IIII	K	W	☀	☀
DL25WUGRIP65*BFBL	6500K	25 W	2500 lm	2000 lm
DL25WUGRIP65*BNBL	4000K	25 W	2450 lm	1950 lm
DL25WUGRIP65*BCBL	3000K	25 W	2400 lm	1900 lm
			* Dimming Opt.	
			DM	0-10V, DALI, PUSH
			CS	CASAMBI
			DOD	DALI / PUSH
			* Optional	
			UE	UE DRIVER

DELAWARE

PRO DL10NR / DL16NR

5700K

4000K

3000K

220-240Vac
50/60Hz

FLICKER FREE

CRI>90

$\cos \varphi > 0,92$

50.000 h

OFF ON
x 30.000

100°

IP20
IP44

DE

BL

PL

5 YEARS
WARRANTY

• Material

PC

PC

AL

DIFFUSER

BODY

REFLECTOR

• Dimming Options

0-10V

DALI

PUSH

CASAMBI

0-10V/DA
Ref. CSB110DA

• Optional

UE DRIVER

KE
Ref. KEU603

DL16N
1-10V
Ref. SL20

ON-OFF
Ref. SP20

• Accessories

TRIM RING
ENJOLIVEUR

Ref. AE / ANE


• Certif.

CE

ENAC

x 24

DL10
DL16



	A	B	C	D
DL10NR	73	110	26	95 ~ 100
DL16NR	120	160	26	146 ~ 150

Measures (mm).

		K	W		
DL10NR*BF		5700K	10 W	1170 lm	970 lm
DL10NR*BN	BL □ PL ■	4000K	10 W	1170 lm	970 lm
DL10NR*BC		3000K	10 W	1120 lm	920 lm
DL16NR*BF		5700K	16 W	1872 lm	1552 lm
DL16NR*BN	BL □ PL ■	4000K	16 W	1872 lm	1552 lm
DL16NR*BC		3000K	16 W	1792 lm	1472 lm
* Dimming Opt.					
DM	0-10V, DALI, PUSH	DA	DALI / PUSH	CS	CASAMBI
* Optional					
UE	UE DRIVER				

DELAWARE

PRO DL25NC / DL25NR

5700K

4000K

3000K

220-240Vac
50/60Hz

FLICKER FREE

CRI>90

$\cos \varphi > 0,92$

50.000 h

OFF ON
x 30.000

100°

IP20
IP44

DE

BL

PL

5 YEARS
WARRANTY

• Material

PC

PC

AL

DIFFUSER

BODY

REFLECTOR

• Dimming Options

0-10V

DALI

PUSH

CASAMBI

0-10V/DA
Ref. CSB110DA

• Optional

UE DRIVER

KE
Ref. KEU603

1-10V
Ref. SL20

ON-OFF
Ref. SP20

• Accessories

TRIM RING
ENJOLIVEUR


Ref. AE / ANE

• Certif.

CE

ENAC

x 24

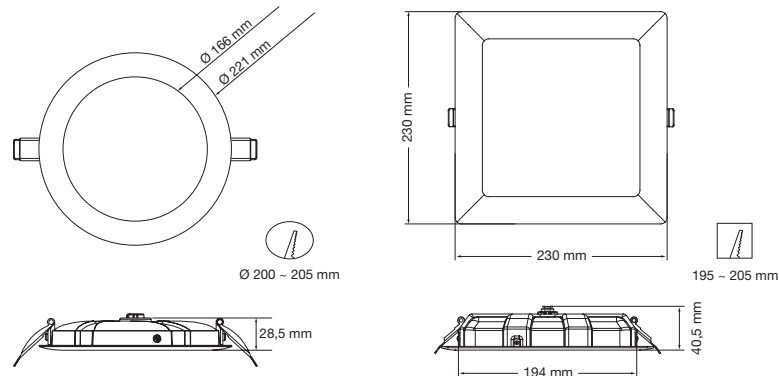

		K	W		
DL25NR*BF	DL25NC*BF	5700K	25 W	2925 lm	2425 lm
DL25NR*BN	DL25NC*BN	4000K	25 W	2925 lm	2425 lm
DL25NR*BC	DL25NC*BC	3000K	25 W	2800 lm	2350 lm
* Dimming Opt.					
DM	0-10V, DALI, PUSH	DA	DALI / PUSH	CS	CASAMBI
* Optional					
UE	UE DRIVER				

NEVADA+

PRO NDR / NDC

CCT SWITCH

220-240Vac
50/60Hz

FLICKER FREE

120°

CRI > 80

cos φ > 0.7

30.000 h

x 10.000

IP20

DE

BL
RAL 9003

• Material

PS

DIFFUSER

AL

BODY

• Certif.

• Dimming Options

0-10V

DALI

PUSH

TRIAC

CASAMBI

• Optional

UE DRIVER

KE
Ref. KEU603

ON-OFF
Ref. SP20

0-10V
Ref. SL20

• Accessories

TRIM RING
ENJOLIVEUR
Ref. AE / ANE

CCT SWITCH

x 40
ND6
ND9

x 20
ND12
ND18
ND24

		OPTIONS	W	CCT		
ND6RCCT0	ND6CCCT0	*	6 W	6000K	492 lm	372 lm
				4000K	462 lm	342 lm
				3000K	402 lm	312 lm
ND9RCCT0	ND9CCCT0	*	9 W	6000K	900 lm	720 lm
				4000K	860 lm	680 lm
				3000K	765 lm	630 lm
ND12RCCT0	ND12CCCT0	*	12 W	6000K	1140 lm	900 lm
				4000K	1080 lm	840 lm
				3000K	960 lm	780 lm
ND18RCCT0	ND18CCCT0	*	18 W	6000K	1908 lm	1548 lm
				4000K	1809 lm	1450 lm
				3000K	1638 lm	1368 lm
ND24RCCT0	ND24CCCT0	*	24 W	6000K	2352 lm	1872 lm
				4000K	2229 lm	1750 lm
				3000K	1992 lm	1632 lm



* Dimming Opt.

D1 0-10V
D2 DALI / PUSH

TC TRIAC (9-12-18-24W)
D5 CASAMBI

* Optional

UE UE DRIVER

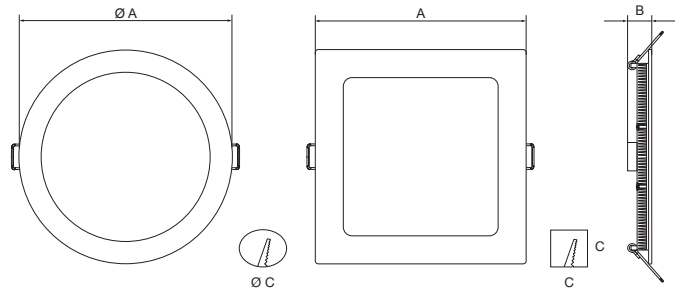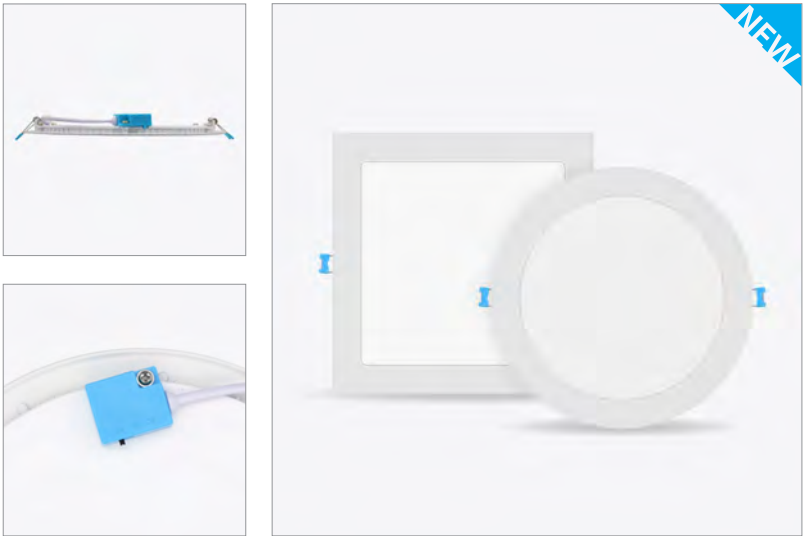

	A	B	C
ND6	120	20	110
ND9	143	20	130
ND12	170	20	155
ND18	220	20	205
ND24	300	20	280

Measures (mm).

NEVADA+

PRO NDR-S / NDC-S

CCT SWITCH

220-240Vac
50/60Hz

FLICKER FREE

120°

CRI > 80

cos φ > 0.5

30.000 h

x 10.000

IP20

DE

BL
RAL 9003

• Material

PS

DIFFUSER

AL

BODY

• Certif.

• Dimming Options

DALI

PUSH

TRIAC


• Optional

KE
Ref. KEU603

ON-OFF
Ref. SP20

x 40
ND6

x 20
ND12
ND18
ND24

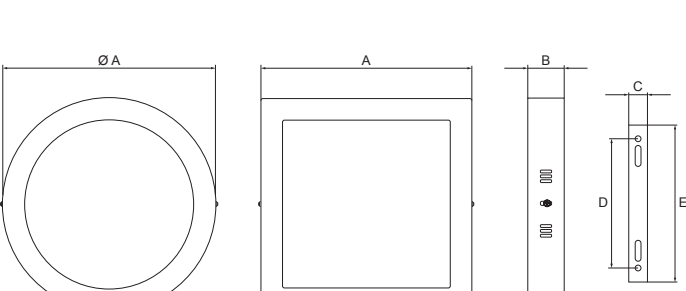

Measures (mm).

	A	B	C	D	E
ND6	120	38	17	90	115
ND12	170	38	17	140	165
ND18	220	38	17	195	217
ND24	300	38	17	268	291

CCT SWITCH

		OPTIONS	W	CCT		
ND6R-SCCT0	ND6C-SCCT0	*	6 W	6000K	492 lm	372 lm
				4000K	462 lm	342 lm
				3000K	402 lm	312 lm
ND12R-SCCT0	ND12C-SCCT0	*	12 W	6000K	1140 lm	900 lm
				4000K	1080 lm	840 lm
				3000K	960 lm	780 lm
ND18R-SCCT0	ND18C-SCCT0	*	18 W	6000K	1908 lm	1548 lm
				4000K	1809 lm	1450 lm
				3000K	1638 lm	1368 lm
ND24R-SCCT0	ND24C-SCCT0	*	24 W	6000K	2352 lm	1872 lm
				4000K	2229 lm	1750 lm
				3000K	1992 lm	1632 lm

* Dimming Opt.

D2 DALI / PUSH (12-18-24W)
TC TRIAC (12-18-24W)

UTAH

PRO

DLU

CCT SWITCH

220-240Vac
50/60Hz

FLICKER FREE

90°

CRI>90

cos φ
>0,9

30.000 h

x 10.000

IP20

DE

BL

RAL 9003

- Material
- V

PC

AL

DIFFUSER

REFLECTOR

BODY

- Dimming Options
- 0-10V

PUSH

DALI

CASAMBI

- Optional
- UE DRIVER

KE

Ref. KEU2403V2

1-10V

Ref. SL20

ON-OFF

Ref. SP20

- Accessories
- TRIM RING

ENJOILVEUR

Ref. AE / ANE
- Certif.
- CE



3000K

4000K

5000K


CCT SWITCH

	OPTIONS	W	CCT		
DLU40RCCT	*	38 W	5700K 4000K 3000K	4706 lm	3906 lm
				4706 lm	3906 lm
				4163 lm	3368 lm
			* Dimming Opt.		
			DT	0-10V, DALI, PUSH	D5
				CASAMBI	
			* Optional		
			UE	UE DRIVER	



Orientable: 0~50°
Orientable: 0~50°

Rotation: 360°
Rotation: 360°

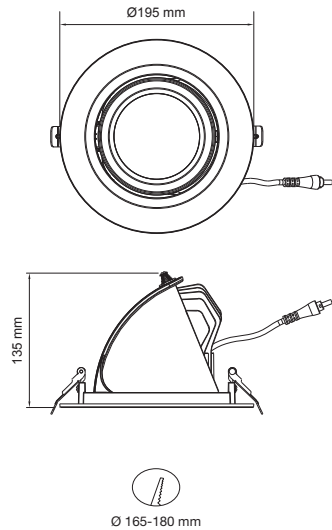

MONTANA

ECO

DLM

CCT SWITCH

200-264Vac
50/60Hz

FLICKER FREE

110°

CRI>80

cos φ
>0,6

20.000 h

x 15.000

IP20

DI

BL

IP44

RAL 9016

- Material
- PC

PC

DIFFUSER

BODY
- Certif.
- CE

- Optional
- ON-OFF

Ref. SP20

KE

Ref. KET85
- Accessories
- TRIM RING

ENJOILVEUR

Ref. AE / ANE

- x 60

DLM08
- x 40


DLM12
- x 20

DLM18

DLM25



IP44
Mounted

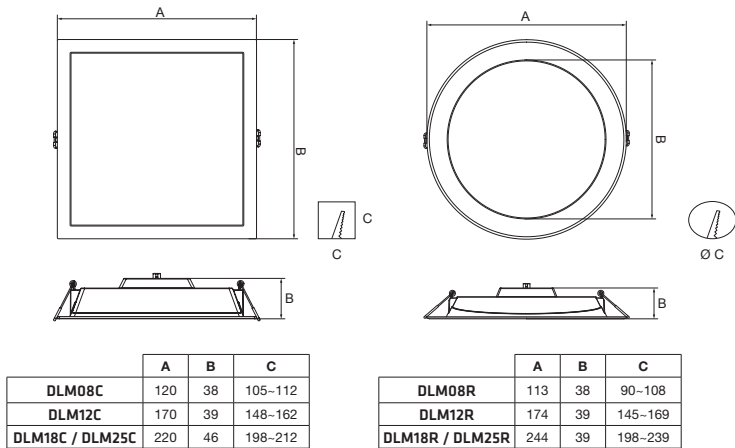

Measures (mm).

3000K

4000K

5000K

CCT SWITCH

		W	CCT		
DLM08CCCT	DLM08RCCT	8 W	6000K 4000K 3000K	880 lm	680 lm
				880 lm	680 lm
				840 lm	640 lm
DLM12CCCT	DLM12RCCT	12 W	6000K 4000K 3000K	1320 lm	1020 lm
				1320 lm	1020 lm
				1260 lm	960 lm
DLM18CCCT	DLM18RCCT	18 W	6000K 4000K 3000K	1980 lm	1530 lm
				1980 lm	1530 lm
				1890 lm	1440 lm
DLM25CCCT	DLM25RCCT	25 W	6000K 4000K 3000K	2750 lm	2125 lm
				2750 lm	2125 lm
				2625 lm	2000 lm

NEBRASKA

ECO

DLN

CCT SWITCH

220-240Vac
50/60Hz

FLICKER FREE

110°

CRI >80

cos φ >0,7

30.000 h

OFF ON
x 10.000

IP20

DI

BL
RAL 9003

• Material

PS
DIFFUSER

PC
BODY

• Optional

ON-OFF
Ref. SP20

KE
Ref. KET85

• Accessories

SURFACE
ASR ASC

TRIM RING
ENJOLIVEUR
Ref. AE / ANE

• Certif.

CE

x 80
DLN9

x 60
DLN12

x 40
DLN18

x 20
DLN24

	A	B	C	D	E
DLN9	126	120	26	105-115	105-115
DLN12	145	145	26	125-135	125-135
DLN18	170	170	26	148-160	148-160
DLN24	225	225	26	200-215	200-215

Measures (mm).

3000K
4000K
5000K

CCT SWITCH

		W	CCT		
DLN9RCCT	DLN9CCCT	9 W	6000K 4000K 3000K	945 lm 945 lm 855 lm	765 lm 765 lm 720 lm
DLN12RCCT	DLN12CCCT	12 W	6000K 4000K 3000K	1260 lm 1260 lm 1140 lm	1020 lm 1020 lm 960 lm
DLN18RCCT	DLN18CCCT	18 W	6000K 4000K 3000K	1960 lm 1960 lm 1800 lm	1600 lm 1600 lm 1530 lm
DLN24RCCT	DLN24CCCT	24 W	6000K 4000K 3000K	2580 lm 2580 lm 2280 lm	2100 lm 2100 lm 2040 lm

DOWNLIGHT
DOWNLIGHT

SPOTLIGHT
SPOTLIGHT

PANELS
PANNEAUX

LINEAR PROFILES
LINÉAIRES

CEILING LIGHTS
PLAFONNIERS

TRACK LIGHT
SPOTS SUR RAIL

NEBRASKA. ACCESSORIES / ACCESSOIRES.

SURFACE MOUNTING / SURFACE

Round surface mounting accessory for DLN.
(Luminaire not included).

Accessoire de surface rond pour DLN.
(Luminaire non compris).

	W
ASR-DLN9	9 W
ASR-DLN12	12 W
ASR-DLN18	18 W
ASR-DLN24	24 W

SURFACE MOUNTING / SURFACE

Square surface mounting accessory for DLN.
(Luminaire not included).

Accessoire de surface carré pour DLN.
(Luminaire non compris).

	W
ASC-DLN9	9 W
ASC-DLN12	12 W
ASC-DLN18	18 W
ASC-DLN24	24 W

64

THREELINE

ThreelineGroup.com

ThreelineGroup.com

THREELINE

65

INDOOR / INTÉRIEUR

TRACK LIGHT
SPOTS SUR RAIL

DOWNLIGHTS. ACCESSORIES / ACCESSOIRES



RECESSED TRIM RING

SIZES

The dimensions will depend on the installation and the downlight.

AE is suitable when the difference between the downlight diameter and the hole diameter is ≥ 25 mm.

The downlight will always remain on the lower part, while the accessory will be placed between the ceiling and the downlight.

ANNEAU ENJOLIVEUR ENCASTRABLE


DIMENSIONS

Les dimensions dépendront des nécessités de chaque installation et du downlight à installer.

L'AE est indiqué pour couvrir des espaces où la différence entre le diamètre de découpe du plafond et celui de l'installation du downlight est ≥ 25 mm.

Le downlight sera toujours posé sur la partie inférieure et l'accessoire entre le plafond et le downlight.

Ref. **AE**



NON-RECESSED TRIM RING

SIZES

The non-recessed ring is designed to cover gaps where the difference between the ceiling cut-out diameter and the downlight diameter is < 25 mm.

The accessory is then placed between the ceiling and the downlight.

ANNEAU ENJOLIVEUR NON ENCASTRABLE

DIMENSIONS

L'ANE est indiqué pour couvrir des espaces où la différence entre le diamètre de découpe du plafond et celui de l'installation du downlight est < 25 mm.

Le downlight sera toujours posé sur la partie inférieure et l'accessoire entre le plafond et le downlight.

Ref. **ANE**

