

5 INCASSI A SOFFITTO

Gli apparecchi da incasso a soffitto per esterni sono ideali per l'illuminazione generale. La loro distribuzione della luce va dalla tipologia a fascio largo fino a quella a fascio stretto. Perfetti per porticati, logge e passaggi coperti, garantiscono un'illuminazione direzionale o diffusa che valorizza gli spazi senza invaderli.

Ceiling recessed luminaires for outdoor are ideal for general lighting. Their light distribution ranges from wide beam to narrow beam. Perfect for arcades, loggias and covered passages, they guarantee directional or diffuse lighting that enhances the spaces without invading them.





RIM 45

Incassato con ghiera in acciaio Ø45
Recessed with steel ring nut Ø45

DESCRIZIONE DESCRIPTION

Rim, l'ultimo nato tra gli incassati Augenti, è un piccolo ma performante apparecchio da incasso con anello in acciaio. Le dimensioni ridotte e l'installazione semplice e veloce ne permettono la collocazione in ambienti esterni o interni. Rim può infatti essere installato a pavimento, parete o soffitto, integrandosi in modo discreto nell'ambiente, lasciando che la luce e l'atmosfera generate siano gli elementi principali della scena. I fasci proposti sono ideali per effetti morbidi o d'accento, per installazioni singole o in serie. L'anello in acciaio inox 316L ed il sistema AcquaStop per la protezione anti-condensa, rendono Rim un prodotto sicuro e poliedrico, ideale per dare luce alla vostra fantasia.

Rim, the latest of the Augenti recessed models, is a small but powerful recessed appliance with steel ring. The small size and quick and easy installation allow it to be placed in outdoor or indoor environments. Rim can be installed on the floor, wall or ceiling, integrating discreetly into the environment, leaving the light and atmosphere generated to be the main elements of the scene. The proposed beams are ideal for soft or accent effects, for single installations or in series. The 316L stainless steel ring and the AcquaStop system for anti-condensation protection, make Rim a safe and versatile product, ideal to give light to your imagination.

INSTALLAZIONE INSTALLATION

Incasso a terra, parete o soffitto

Ground, wall or ceiling recessed

CORPO BODY

Alluminio da tornitura Serie 6000 anticorodal, per maggiore resistenza alla corrosione

Anticorodal turning aluminum 6000 Series, for greater corrosion resistance

BOX BOX

Polipropilene (PP) 30% fibra stabilizzata UV GWT750

Polypropylene (PP) 30% fiber UV stabilized GWT750

SCHERMO SCREEN

Vetro extrachiario temprato 6 mm

Extra clear tempered glass 6 mm

GUARNIZIONI SEALS

EPDM

EPDM

CORNICE FRAME

Acciaio AISI316L


Stainless steel AISI316L

VERNICIATURA FINISHING

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder



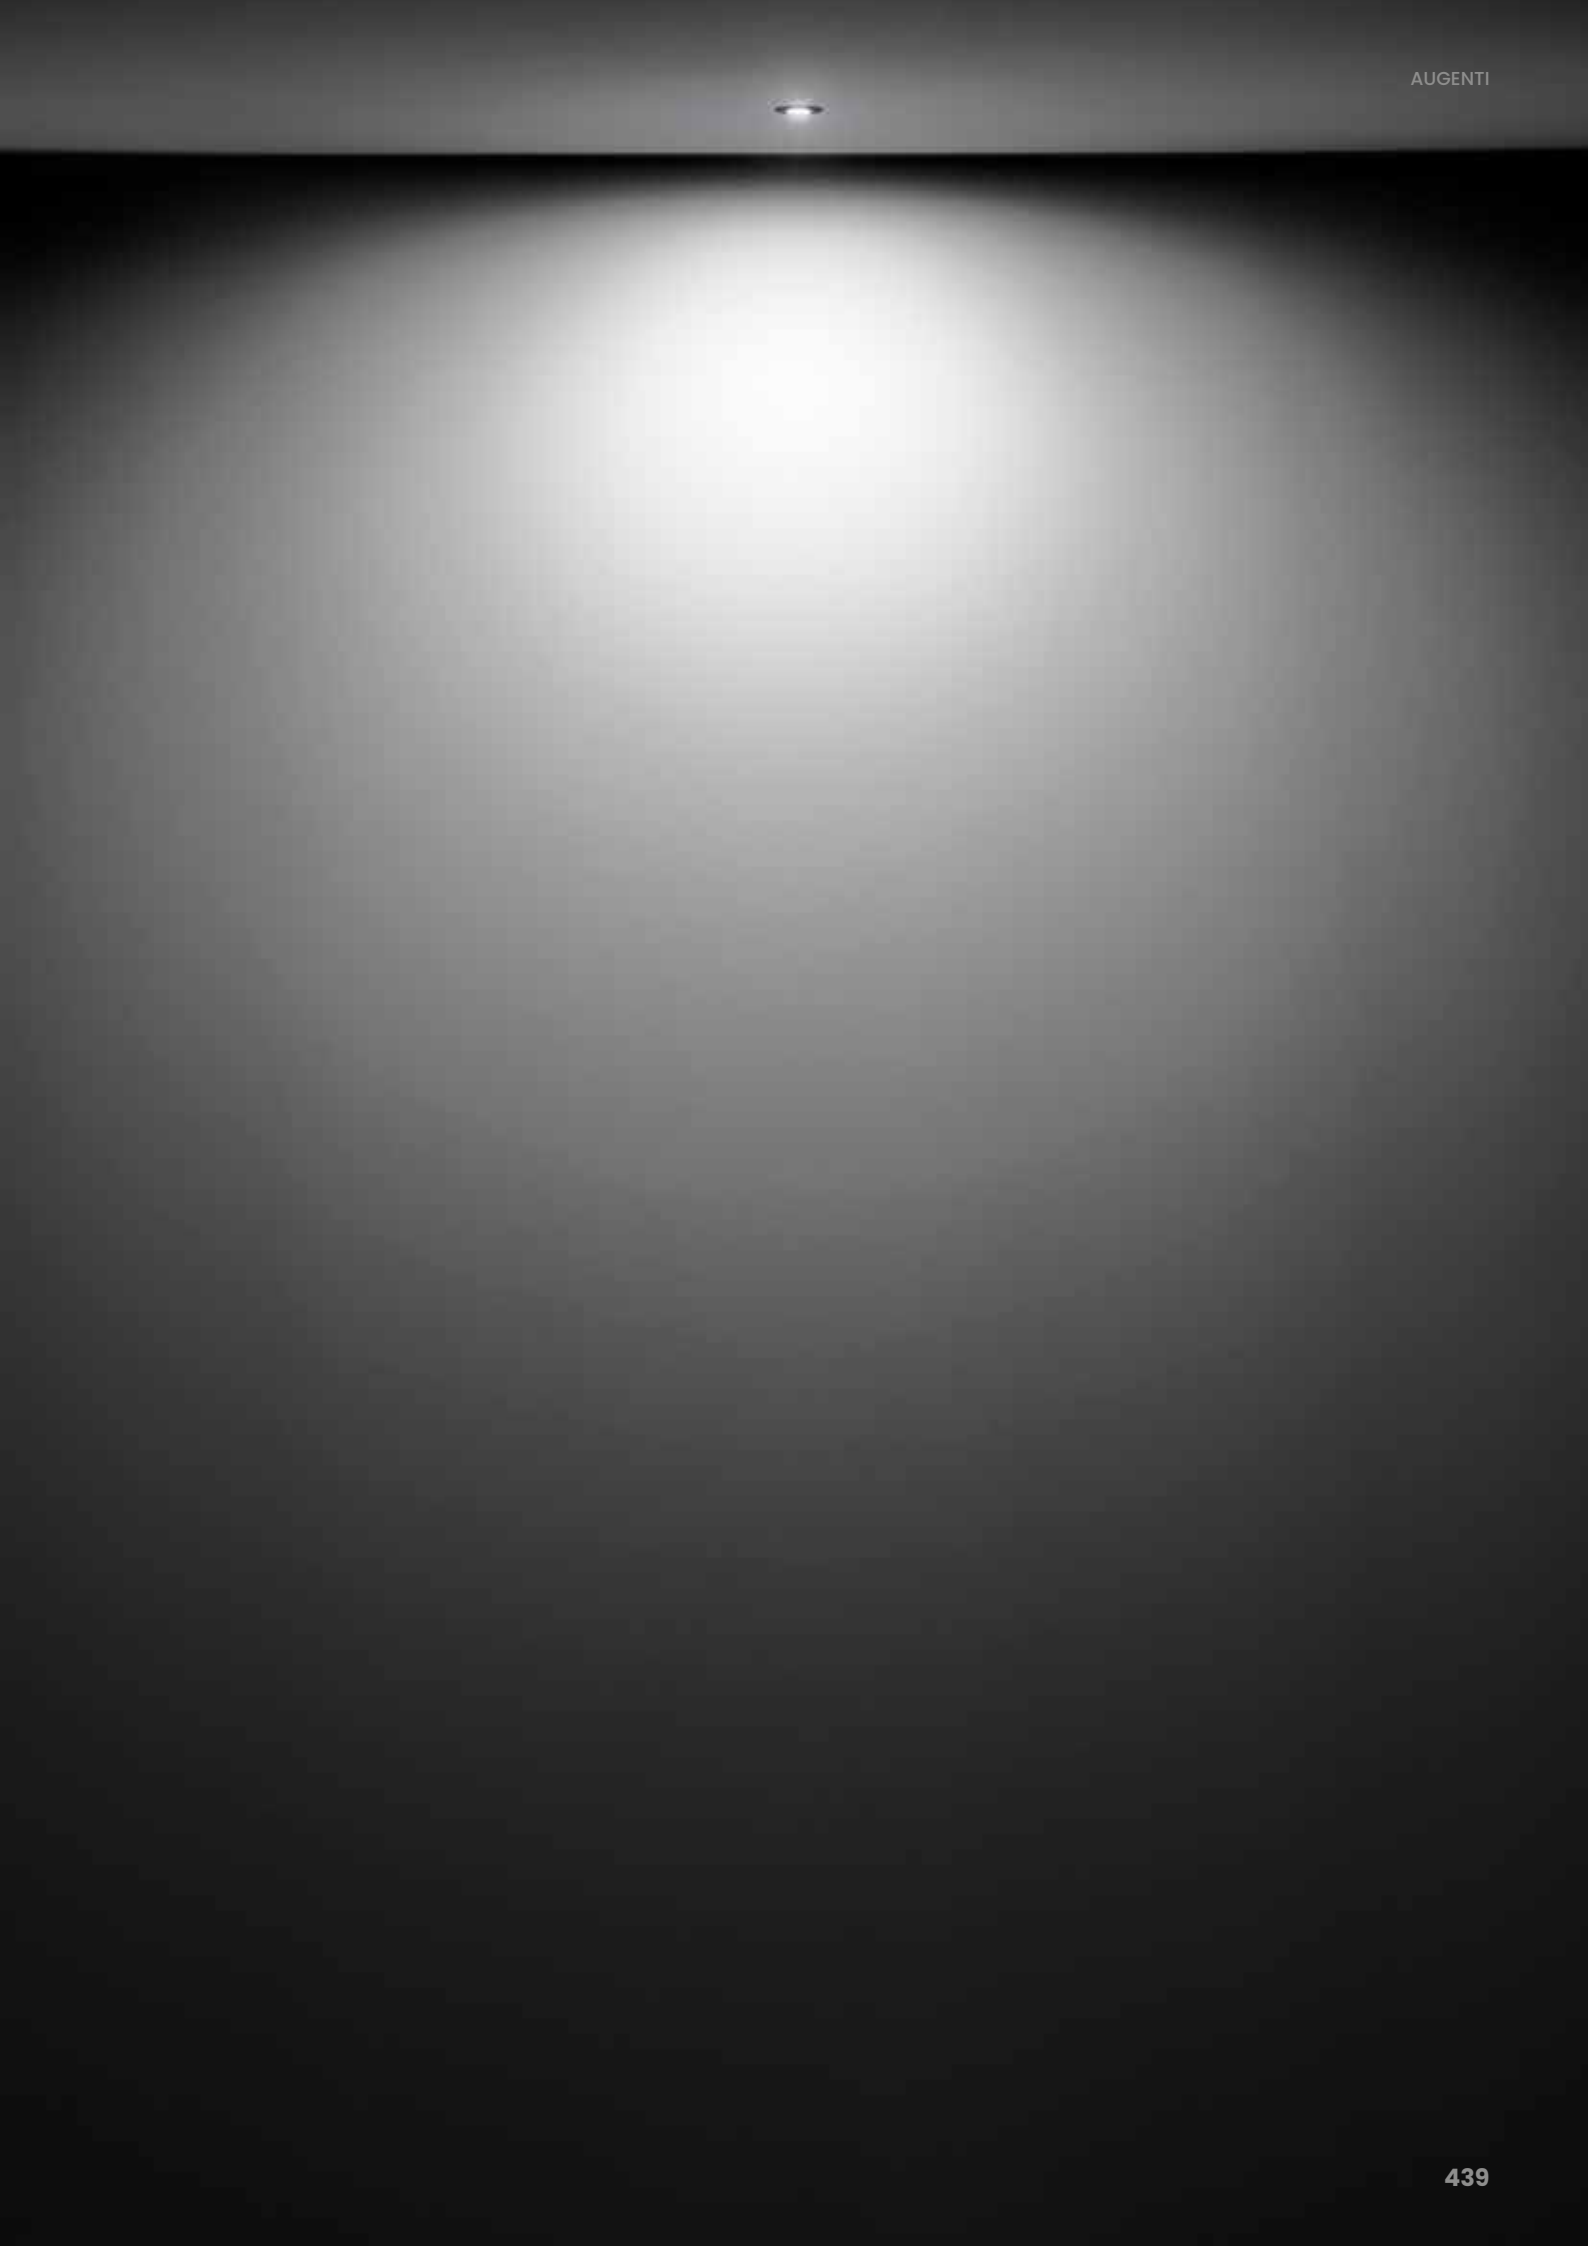



**CONFIG.
CODICE**
CODE
CONFIG.

▲ → **H=2700K
W=3000K
N=4000K**

**VERSIONE IN
TENSIONE**
CONSTANT
VOLTAGE

2W CON DRIVER REMOTO 24Vdc
2W REMOTE DRIVER 24Vdc

**VERSIONE IN
CORRENTE**
CONSTANT
CURRENT

2W CON DRIVER REMOTO MAX 700mA DC
2W REMOTE DRIVER MAX 700mA DC



IP 67

IK 08



**HUB
SYSTEM**

RIM 45

INCASSO CON GHIERA IN ACCIAIO Ø45

24VDC

RECESSED WITH STEEL RING NUT Ø45

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3045C/▲RRCNB99	 STRETTO/15° NARROW/15°	2W	270 lm	220 lm	24Vdc	III	67	08	80
3045C/▲RRCMB99	 MEDIO/30° MEDIUM/30°	2W	270 lm	210 lm	24Vdc	III	67	08	80
3045C/▲RRCWB99	 LARGO/40° WIDE/40°	2W	270 lm	210 lm	24Vdc	III	67	08	80
3045C/▲RRCSW99	 MOLTO LARGO/60° SUPER WIDE/60°	2W	270 lm	210 lm	24Vdc	III	67	08	80
3045C/▲RRCOB199	 OVALE/15°X60° OVAL/15°X60°	2W	270 lm	210 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 6 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 6 MM

ON/OFF

INCASSO CON GHIERA IN ACCIAIO VETRO OPALE Ø45

24VDC

RECESSED WITH STEEL RING NUT OPAL GLASS Ø45

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3045C/▲RRCVS99	 DIFFUSO/120° DIFFUSED/120°	2W	270 lm	28 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 6 MM - EXTRA CLEAR OPAL TEMPERED GLASS 6 MM

ON/OFF

ACCESSORI

ACCESSORIES

MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.577 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	E.TRA.579 1 DRIVER FOR 9-25 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.632 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF

INCASSO CON GHIERA IN ACCIAIO Ø45**MAX 700MA***RECESSED WITH STEEL RING NUT Ø45**MAX 700MA*

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3045C/▲RCCNB99	STRETTO/15° NARROW/15°	2W	300 lm	240 lm	max 700mA	III	67	08	80
3045C/▲RCCMB99	MEDIO/30° MEDIUM/30°	2W	300 lm	230 lm	max 700mA	III	67	08	80
3045C/▲RCCWB99	LARGO/40° WIDE/40°	2W	300 lm	230 lm	max 700mA	III	67	08	80
3045C/▲RCCSW99	MOLTO LARGO/60° SUPER WIDE/60°	2W	300 lm	230 lm	max 700mA	III	67	08	80
3045C/▲RCCOB199	OVALE/15°X60° OVAL/15°X60°	2W	300 lm	230 lm	max 700mA	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 6 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 6 MM

DIMMERABILE - DIMMABLE

INCASSO CON GHIERA IN ACCIAIO VETRO OPALE Ø45**MAX 700MA***RECESSED WITH STEEL RING NUT OPAL GLASS Ø45**MAX 700MA*

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3045C/▲RCCVS99	DIFFUSO/120° DIFFUSED/120°	2W	300 lm	32 lm	max 700mA	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 6 MM - EXTRA CLEAR OPAL TEMPERED GLASS 6 MM

DIMMERABILE - DIMMABLE

ACCESSORI*ACCESSORIES*

MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.658.700 1 DRIVER FOR 1-12 LAMPS	ALIMENTATORE ON/OFF 23W 700MA IP67 DRIVER ON/OFF 23W 700MA IP67
E.TRA.621.700 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 20W 700MA IP20 DRIVER ON/OFF 20W 700MA IP20	E.TRA.659.700 1 DRIVER FOR 1-12 LAMPS	ALIMENTATORE DALI2 23W 700MA IP67 DRIVER DALI2 23W 700MA IP67
E.TRA.623.700 1 DRIVER FOR 1-14 LAMPS	ALIMENTATORE ON/OFF 36W 700MA IP20 DRIVER ON/OFF 36W 700MA IP20	HUB.700.001.ND 1 HUB FOR 1-8 LAMPS	HUB 700MA IP66 ON/OFF CON DRIVER 60W IP20 HUB 700MA IP66 ON/OFF WITH DRIVER 60W IP20
E.TRA.634.700 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE ON/OFF 60W 700MA IP20 DRIVER ON/OFF 60W 700MA IP20	HUB.700.001.DA2 1 HUB FOR 1-8 LAMPS	HUB 700MA IP66 DALI-2 CON DRIVER 60W IP20 HUB 700MA IP66 DALI-2 WITH DRIVER 60W IP20
E.TRA.635.700 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE DALI2 60W 700MA IP20 DRIVER DALI2 60W 700MA IP20	HUB.700.001.CA 1 HUB FOR 1-8 LAMPS	HUB 700MA IP66 CASAMBI CON DRIVER 60W IP20 HUB 700MA IP66 CASAMBI WITH DRIVER 60W IP20
E.TRA.636.700 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE CASAMBI 60W 700MA IP20 DRIVER CASAMBI 60W 700MA IP20		

RIM 45 PAINTED

INCASSO CON GHIERA IN ACCIAIO VERNICIATO Ø45

24VDC

RECESSED WITH PAINTED STEEL RING NUT Ø45

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3045C/▲RRCNB	STRETTO/15° NARROW/15°	2W	270 lm	220 lm	24Vdc	III	67	08	80
3045C/▲RRCMB	MEDIO/30° MEDIUM/30°	2W	270 lm	210 lm	24Vdc	III	67	08	80
3045C/▲RRCWB	LARGO/40° WIDE/40°	2W	270 lm	210 lm	24Vdc	III	67	08	80
3045C/▲RRCSW	MOLTO LARGO/60° SUPER WIDE/60°	2W	270 lm	210 lm	24Vdc	III	67	08	80
3045C/▲RRCOB1	OVALE/15°X60° OVAL/15°X60°	2W	270 lm	210 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 6 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 6 MM

ON/OFF

INCASSO CON GHIERA IN ACCIAIO VERNICIATO VETRO OPALE Ø45

24VDC

RECESSED WITH PAINTED STEEL RING NUT OPAL GLASS Ø45

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3045C/▲RRCVS	DIFFUSO/120° DIFFUSED/120°	2W	270 lm	28 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 6 MM - EXTRA CLEAR OPAL TEMPERED GLASS 6 MM

ON/OFF

ACCESSORI

ACCESSORIES

MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.577 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	E.TRA.579 1 DRIVER FOR 9-25 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.632 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF

INCASSO CON GHIERA IN ACCIAIO VERNICIATO Ø45**MAX 700MA***RECESSED WITH PAINTED STEEL RING NUT Ø45***MAX 700MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3045C/▲RCCNB	STRETTO/15° NARROW/15°	2W	300 lm	240 lm	max 700mA	III	67	08	80
3045C/▲RCCMB	MEDIO/30° MEDIUM/30°	2W	300 lm	230 lm	max 700mA	III	67	08	80
3045C/▲RCCWB	LARGO/40° WIDE/40°	2W	300 lm	230 lm	max 700mA	III	67	08	80
3045C/▲RCCSW	MOLTO LARGO/60° SUPER WIDE/60°	2W	300 lm	230 lm	max 700mA	III	67	08	80
3045C/▲RCCOB1	OVALE/15°X60° OVAL/15°X60°	2W	300 lm	230 lm	max 700mA	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 6 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 6 MM

DIMMERABILE - DIMMABLE

INCASSO CON GHIERA IN ACCIAIO VERNICIATO VETRO OPALE Ø45**MAX 700MA***RECESSED WITH PAINTED STEEL RING NUT OPAL GLASS Ø45***MAX 700MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3045C/▲RCCVS	DIFFUSO/120° DIFFUSED/120°	2W	300 lm	32 lm	max 700mA	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 6 MM - EXTRA CLEAR OPAL TEMPERED GLASS 6 MM

DIMMERABILE - DIMMABLE

ACCESSORI*ACCESSORIES*

MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.658.700 1 DRIVER FOR 1-12 LAMPS	ALIMENTATORE ON/OFF 23W 700MA IP67 DRIVER ON/OFF 23W 700MA IP67
E.TRA.621.700 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 20W 700MA IP20 DRIVER ON/OFF 20W 700MA IP20	E.TRA.659.700 1 DRIVER FOR 1-12 LAMPS	ALIMENTATORE DALI2 23W 700MA IP67 DRIVER DALI2 23W 700MA IP67
E.TRA.623.700 1 DRIVER FOR 1-14 LAMPS	ALIMENTATORE ON/OFF 36W 700MA IP20 DRIVER ON/OFF 36W 700MA IP20	HUB.700.001.ND 1 HUB FOR 1-8 LAMPS	HUB 700MA IP66 ON/OFF CON DRIVER 60W IP20 HUB 700MA IP66 ON/OFF WITH DRIVER 60W IP20
E.TRA.634.700 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE ON/OFF 60W 700MA IP20 DRIVER ON/OFF 60W 700MA IP20	HUB.700.001.DA2 1 HUB FOR 1-8 LAMPS	HUB 700MA IP66 DALI-2 CON DRIVER 60W IP20 HUB 700MA IP66 DALI-2 WITH DRIVER 60W IP20
E.TRA.635.700 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE DALI2 60W 700MA IP20 DRIVER DALI2 60W 700MA IP20	HUB.700.001.CA 1 HUB FOR 1-8 LAMPS	HUB 700MA IP66 CASAMBI CON DRIVER 60W IP20 HUB 700MA IP66 CASAMBI WITH DRIVER 60W IP20
E.TRA.636.700 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE CASAMBI 60W 700MA IP20 DRIVER CASAMBI 60W 700MA IP20		

ACCESSORI

ACCESSORIES

CONNETTORI

CONNECTORS




MOR682P/2V

Connettore IP68 2Poli/2Vie 2 x 1 mm²
Connector IP68 2Poles/2Ways 2 x 1 mm²
 L 72 x Ø 22

ALIMENTATORI 24Vdc

DRIVER 24Vdc

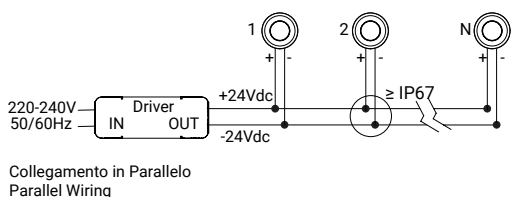

E.TRA.577

1 Driver for 1-8 Lamps

Alimentatore ON/OFF 25W 24Vdc IP67
Driver ON/OFF 25W 24Vdc IP67
 L 148 x W 40 x H 32



E.TRA.579

1 Driver for 9-25 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
 L 140 x W 63 x H 32



E.TRA.631

1 Driver for 1-5 Lamps

Alimentatore ON/OFF 15W 24Vdc IP20
Driver ON/OFF 15W 24Vdc IP20
 L 106 x W 33 x H 22



E.TRA.632

1 Driver for 1-20 Lamps

Alimentatore ON/OFF 70W 24Vdc IP20
Driver ON/OFF 70W 24Vdc IP20
 L 124 x W 80 x H 22



HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA 24Vdc


HUB - READY TO CONNECT SYSTEM 24Vdc



HUB.24V.001.ND


1 Hub for 1-8 Lamps

Hub 70W 24Vdc IP66 ON/OFF
Hub 70W 24Vdc IP66 ON/OFF
 L 235 x W 200 x H 92



ALIMENTATORI CC – 700mA

DRIVER CC – 700mA



Collegamento in Serie
Series Wiring



E.TRA.621.700
1 Driver for 1-8 Lamps

Alimentatore ON/OFF 20W 700mA IP20
Driver ON/OFF 20W 700mA IP20
L 111 x W 52 x H 22



E.TRA.623.700
1 Driver for 1-14 Lamps

Alimentatore ON/OFF 36W 700mA IP20
Driver ON/OFF 36W 700mA IP20
L 163 x W 30 x H 21



E.TRA.634.700
1 Driver for 1-20 Lamps

Alimentatore ON/OFF 60W 700mA IP20
Driver ON/OFF 60W 700mA IP20
L 124 x W 80 x H 22



E.TRA.635.700
1 Driver for 1-20 Lamps

Alimentatore DALI2 60W 700mA IP20
Driver DALI2 60W 700mA IP20
L 124 x W 80 x H 22



E.TRA.636.700
1 Driver for 1-20 Lamps

Alimentatore CASAMBI 60W 700mA IP20
Driver CASAMBI 60W 700mA IP20
L 124 x W 80 x H 22



E.TRA.658.700
1 Driver for 1-12 Lamps

Alimentatore ON/OFF 23W 700mA IP67
Driver ON/OFF 23W 700mA IP67
L 124 x W 47 x H 26



E.TRA.659.700
1 Driver for 1-12 Lamps

Alimentatore DALI2 23W 700mA IP67
Driver DALI2 23W 700mA IP67
L 124 x W 47 x H 26

HUB – SISTEMI DI CONNESSIONE SEMPLIFICATA CC 700mA

HUB – READY TO CONNECT SYSTEM CC 700mA



HUB.700.001.CA
1 Hub for 1-8 Lamps

Hub 700mA IP66 CASAMBI con driver 60W IP20
Hub 700mA IP66 CASAMBI with driver 60W IP20
L 235 x W 200 x H 92




HUB.700.001.DA2
1 Hub for 1-8 Lamps

Hub 700mA IP66 DALI-2 con driver 60W IP20
Hub 700mA IP66 DALI-2 with driver 60W IP20
L 235 x W 200 x H 92



HUB.700.001.ND
1 Hub for 1-8 Lamps

Hub 700mA IP66 ON/OFF con driver 60W IP20
Hub 700mA IP66 ON/OFF with driver 60W IP20
L 235 x W 200 x H 92

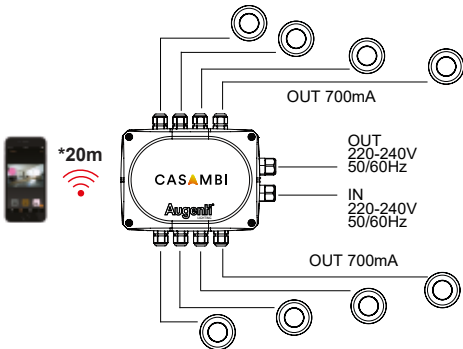





RIM 70

Incassato con ghiera in acciaio Ø70
Recessed with steel ring nut Ø70

DESCRIZIONE DESCRIPTION

Rim, l'ultimo nato tra gli incassati Augenti, è un piccolo ma performante apparecchio da incasso con anello in acciaio. Le dimensioni ridotte e l'installazione semplice e veloce ne permettono la collocazione in ambienti esterni o interni. Rim può infatti essere installato a pavimento, parete o soffitto, integrandosi in modo discreto nell'ambiente, lasciando che la luce e l'atmosfera generate siano gli elementi principali della scena. I fasci proposti sono ideali per effetti morbidi o d'accento, per installazioni singole o in serie. L'anello in acciaio inox 316L ed il sistema AcquaStop per la protezione anti-condensa, rendono Rim un prodotto sicuro e poliedrico, ideale per dare luce alla vostra fantasia.

Rim, the latest of the Augenti recessed models, is a small but powerful recessed appliance with steel ring. The small size and quick and easy installation allow it to be placed in outdoor or indoor environments. Rim can be installed on the floor, wall or ceiling, integrating discreetly into the environment, leaving the light and atmosphere generated to be the main elements of the scene. The proposed beams are ideal for soft or accent effects, for single installations or in series. The 316L stainless steel ring and the AcquaStop system for anti-condensation protection, make Rim a safe and versatile product, ideal to give light to your imagination.

INSTALLAZIONE INSTALLATION

Incasso a terra, parete o soffitto

Ground, wall or ceiling recessed

CORPO BODY

Alluminio da tornitura Serie 6000 anticorrosione, per maggiore resistenza alla corrosione

Anticorrosion turning aluminum 6000 Series, for greater corrosion resistance

BOX BOX

Polipropilene (PP) 30% fibra stabilizzata UV GWT750

Polypropylene (PP) 30% fiber UV stabilized GWT750

SCHERMO SCREEN

Vetro extrachiaro temprato 6 mm

Extra clear tempered glass 6 mm

GUARNIZIONI SEALS

EPDM

EPDM

CORNICE FRAME

Acciaio AISI316L


Stainless steel AISI316L

VERNICIATURA FINISHING

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder



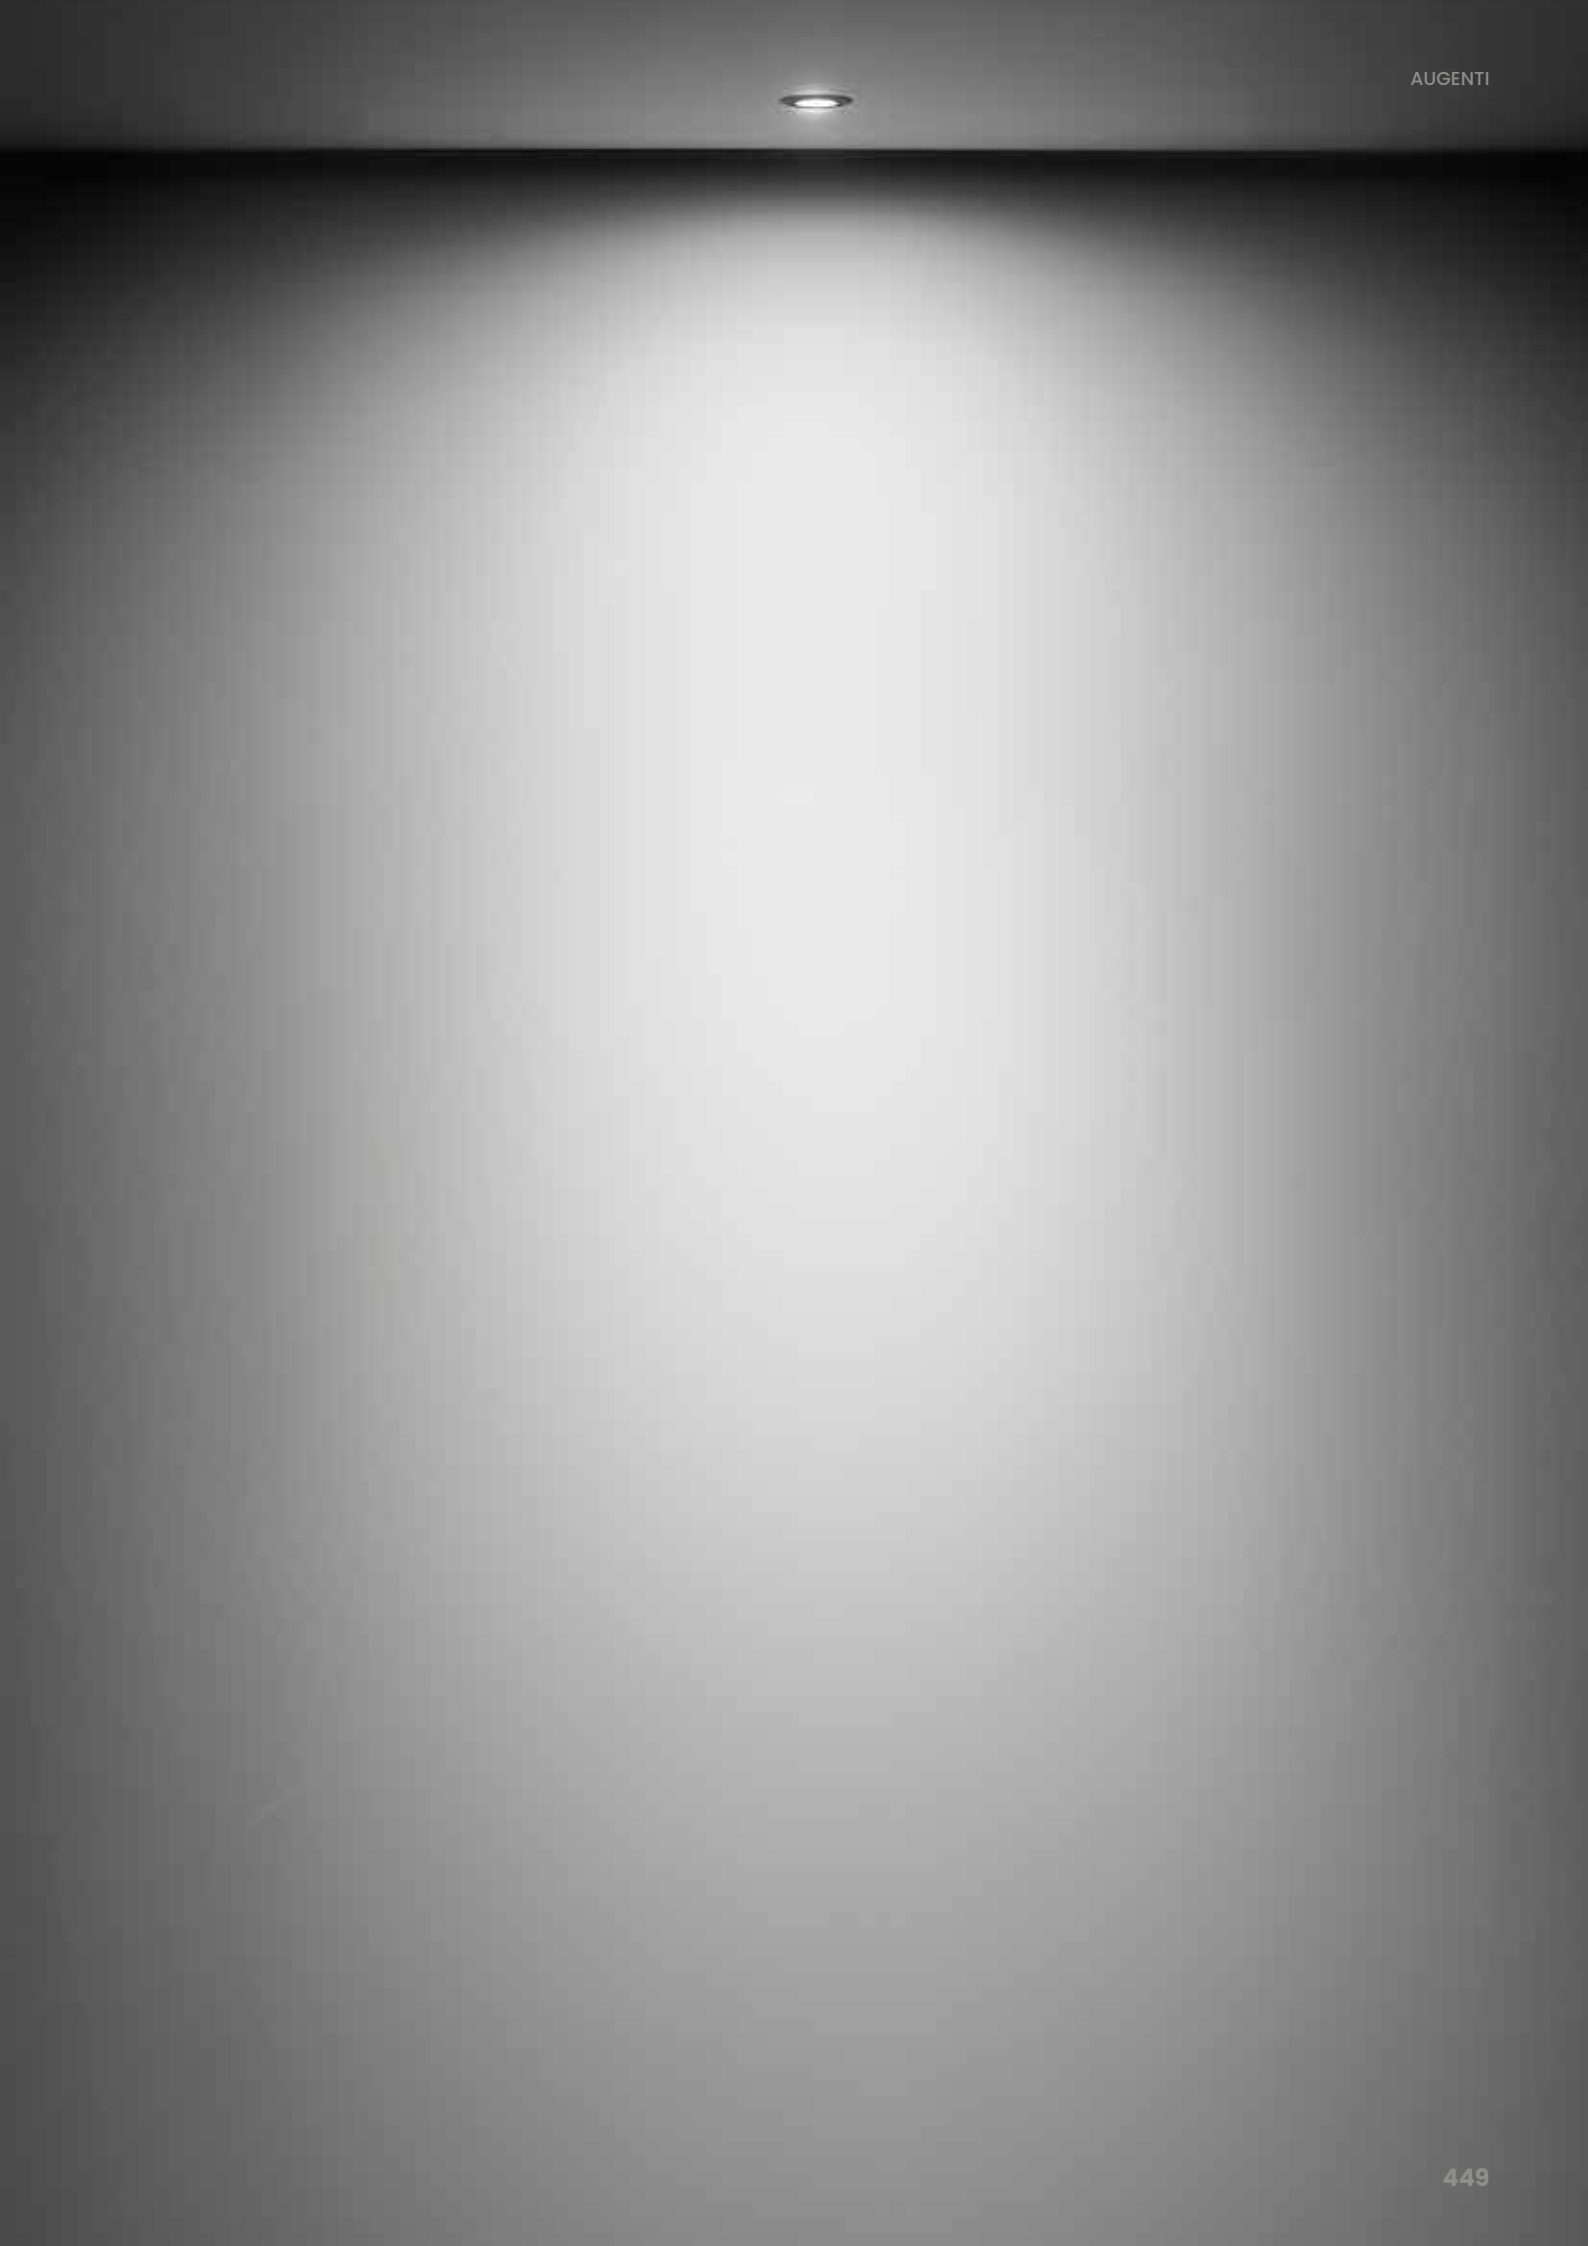



**CONFIG.
CODICE**
CODE
CONFIG.

▲ → **H=2700K**
W=3000K
N=4000K

**VERSIONE IN
TENSIONE**
CONSTANT
VOLTAGE

6W CON DRIVER REMOTO 24Vdc
6W REMOTE DRIVER 24Vdc



**VERSIONE IN
CORRENTE**
CONSTANT
CURRENT

6W CON DRIVER REMOTO MAX 500mA DC
6W REMOTE DRIVER MAX 500mA DC



IP 67

IK 08



**HUB
SYSTEM**


RIM 70

INCASSO CON GHIERA IN ACCIAIO Ø70

24VDC

RECESSED WITH STEEL RING NUT Ø70

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3070C/▲RRCNB99	 STRETTO/10° NARROW/10°	6W	690 lm	520 lm	24Vdc	III	67	08	80
3070C/▲RRCMB99	 MEDIO/24° MEDIUM/24°	6W	690 lm	510 lm	24Vdc	III	67	08	80
3070C/▲RRCWB99	 LARGO/36° WIDE/36°	6W	690 lm	505 lm	24Vdc	III	67	08	80
3070C/▲RRCSW99	 MOLTO LARGO/60° SUPER WIDE/60°	6W	690 lm	508 lm	24Vdc	III	67	08	80
3070C/▲RRCOB99	 OVALE/15°X55° OVAL/15°X55°	6W	690 lm	554 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

ON/OFF

INCASSO CON GHIERA IN ACCIAIO VETRO OPALE Ø70

24VDC

RECESSED WITH STEEL RING NUT OPAL GLASS Ø70

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3070C/▲RRCVS99	 DIFFUSO/120° DIFFUSED/120°	6W	690 lm	70 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

ON/OFF

ACCESSORI

ACCESSORIES

MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.577 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-2 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	E.TRA.579 1 DRIVER FOR 4-12 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.632 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF

INCASSO CON GHIERA IN ACCIAIO Ø70**MAX 500MA***RECESSED WITH STEEL RING NUT Ø70***MAX 500MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3070C/▲RCCNB99	STRETTO/10° NARROW/10°	6W	690 lm	520 lm	max 500mA	III	67	08	80
3070C/▲RCCMB99	MEDIO/24° MEDIUM/24°	6W	690 lm	510 lm	max 500mA	III	67	08	80
3070C/▲RCCWB99	LARGO/36° WIDE/36°	6W	690 lm	505 lm	max 500mA	III	67	08	80
3070C/▲RCCSW99	MOLTO LARGO/60° SUPER WIDE/60°	6W	690 lm	508 lm	max 500mA	III	67	08	80
3070C/▲RCCOB99	OVALE/15°X55° OVAL/15°X55°	6W	690 lm	554 lm	max 500mA	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

INCASSO CON GHIERA IN ACCIAIO VETRO OPALE Ø70**MAX 500MA***RECESSED WITH STEEL RING NUT OPAL GLASS Ø70***MAX 500MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3070C/▲RCCVS99	DIFFUSO/120° DIFFUSED/120°	6W	690 lm	70 lm	max 500mA	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.658.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 23W 500MA IP67 DRIVER ON/OFF 23W 500MA IP67
E.TRA.621.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 20W 500MA IP20 DRIVER ON/OFF 20W 500MA IP20	E.TRA.659.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE DALI2 23W 500MA IP67 DRIVER DALI2 23W 500MA IP67
E.TRA.623.500 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 36W 500MA IP20 DRIVER ON/OFF 36W 500MA IP20	HUB.500.001.ND 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 ON/OFF CON DRIVER 60W IP20 HUB 500MA IP66 ON/OFF WITH DRIVER 60W IP20
E.TRA.634.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 60W 500MA IP20 DRIVER ON/OFF 60W 500MA IP20	HUB.500.001.DA2 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 DALI-2 CON DRIVER 60W IP20 HUB 500MA IP66 DALI-2 WITH DRIVER 60W IP20
E.TRA.635.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE DALI2 60W 500MA IP20 DRIVER DALI2 60W 500MA IP20	HUB.500.001.CA 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 CASAMBI CON DRIVER 60W IP20 HUB 500MA IP66 CASAMBI WITH DRIVER 60W IP20
E.TRA.636.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE CASAMBI 60W 500MA IP20 DRIVER CASAMBI 60W 500MA IP20		

RIM 70 PAINTED

INCASSO CON GHIERA IN ACCIAIO VERNICIATO Ø70

24VDC

RECESSED WITH PAINTED STEEL RING NUT Ø70

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3070C/▲RRCNB	STRETTO/10° NARROW/10°	6W	690 lm	520 lm	24Vdc	III	67	08	80
3070C/▲RRCMB	MEDIO/24° MEDIUM/24°	6W	690 lm	510 lm	24Vdc	III	67	08	80
3070C/▲RRCWB	LARGO/36° WIDE/36°	6W	690 lm	505 lm	24Vdc	III	67	08	80
3070C/▲RRCSW	MOLTO LARGO/60° SUPER WIDE/60°	6W	690 lm	508 lm	24Vdc	III	67	08	80
3070C/▲RRCOB	OVALE/15°X55° OVAL/15°X55°	6W	690 lm	554 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

ON/OFF

INCASSO CON GHIERA IN ACCIAIO VERNICIATO VETRO OPALE Ø70

24VDC

RECESSED WITH PAINTED STEEL RING NUT OPAL GLASS Ø70

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3070C/▲RRCVS	DIFFUSO/120° DIFFUSED/120°	6W	690 lm	70 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

ON/OFF

ACCESSORI

ACCESSORIES

MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.577 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-2 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	E.TRA.579 1 DRIVER FOR 4-12 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.632 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF

INCASSO CON GHIERA IN ACCIAIO VERNICIATO Ø70 MAX 500MA

RECESSED WITH PAINTED STEEL RING NUT Ø70
MAX 500MA




CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3070C/▲RCCNB	STRETTO/10° NARROW/10°	6W	690 lm	520 lm	max 500mA	III	67	08	80
3070C/▲RCCMB	MEDIO/24° MEDIUM/24°	6W	690 lm	510 lm	max 500mA	III	67	08	80
3070C/▲RCCWB	LARGO/36° WIDE/36°	6W	690 lm	505 lm	max 500mA	III	67	08	80
3070C/▲RCCSW	MOLTO LARGO/60° SUPER WIDE/60°	6W	690 lm	508 lm	max 500mA	III	67	08	80
3070C/▲RCCOB	OVALE/15°X55° OVAL/15°X55°	6W	690 lm	554 lm	max 500mA	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

INCASSO CON GHIERA IN ACCIAIO VERNICIATO VETRO OPALE Ø70 MAX 500MA

RECESSED WITH PAINTED STEEL RING NUT OPAL GLASS Ø70
MAX 500MA



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3070C/▲RCCVS	DIFFUSO/120° DIFFUSED/120°	6W	690 lm	70 lm	max 500mA	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.658.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 23W 500MA IP67 DRIVER ON/OFF 23W 500MA IP67
E.TRA.621.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 20W 500MA IP20 DRIVER ON/OFF 20W 500MA IP20	E.TRA.659.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE DALI2 23W 500MA IP67 DRIVER DALI2 23W 500MA IP67
E.TRA.623.500 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 36W 500MA IP20 DRIVER ON/OFF 36W 500MA IP20	HUB.500.001.ND 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 ON/OFF CON DRIVER 60W IP20 HUB 500MA IP66 ON/OFF WITH DRIVER 60W IP20
E.TRA.634.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 60W 500MA IP20 DRIVER ON/OFF 60W 500MA IP20	HUB.500.001.DA2 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 DALI-2 CON DRIVER 60W IP20 HUB 500MA IP66 DALI-2 WITH DRIVER 60W IP20
E.TRA.635.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE DALI2 60W 500MA IP20 DRIVER DALI2 60W 500MA IP20	HUB.500.001.CA 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 CASAMBI CON DRIVER 60W IP20 HUB 500MA IP66 CASAMBI WITH DRIVER 60W IP20
E.TRA.636.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE CASAMBI 60W 500MA IP20 DRIVER CASAMBI 60W 500MA IP20		

ACCESSORI

ACCESSORIES

CONNETTORI

CONNECTORS




MOR682P/2V

Connettore IP68 2Poli/2Vie 2 x 1 mm²
Connector IP68 2Poles/2Ways 2 x 1 mm²
 L 72 x Ø 22

ALIMENTATORI 24Vdc

DRIVER 24Vdc

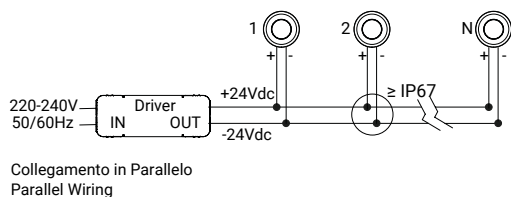

E.TRA.577

1 Driver for 1-3 Lamps

Alimentatore ON/OFF 25W 24Vdc IP67
Driver ON/OFF 25W 24Vdc IP67
 L 148 x W 40 x H 32



E.TRA.579

1 Driver for 4-12 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
 L 140 x W 63 x H 32



E.TRA.631

1 Driver for 1-2 Lamps

Alimentatore ON/OFF 15W 24Vdc IP20
Driver ON/OFF 15W 24Vdc IP20
 L 106 x W 33 x H 22



E.TRA.632

1 Driver for 1-8 Lamps

Alimentatore ON/OFF 70W 24Vdc IP20
Driver ON/OFF 70W 24Vdc IP20
 L 124 x W 80 x H 22

HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA 24Vdc


HUB - READY TO CONNECT SYSTEM 24Vdc



HUB.24V.001.ND


1 Hub for 1-8 Lamps

Hub 70W 24Vdc IP66 ON/OFF
Hub 70W 24Vdc IP66 ON/OFF
 L 235 x W 200 x H 92



ALIMENTATORI CC – 500mA

DRIVER CC – 500mA

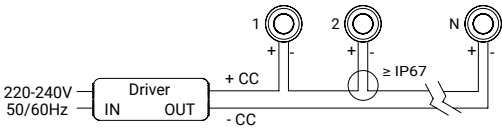

Collegamento in Serie
Series Wiring



E.TRA.621.500
1 Driver for 1-3 Lamps

Alimentatore ON/OFF 20W 500mA IP20
Driver ON/OFF 20W 500mA IP20
L 111 x W 52 x H 22



E.TRA.623.500
1 Driver for 1-4 Lamps

Alimentatore ON/OFF 36W 500mA IP20
Driver ON/OFF 36W 500mA IP20
L 163 x W 30 x H 21



E.TRA.634.500
1 Driver for 1-5 Lamps

Alimentatore ON/OFF 60W 500mA IP20
Driver ON/OFF 60W 500mA IP20
L 124 x W 80 x H 22



E.TRA.635.500
1 Driver for 1-5 Lamps

Alimentatore DALI2 60W 500mA IP20
Driver DALI2 60W 500mA IP20
L 124 x W 80 x H 22



E.TRA.636.500
1 Driver for 1-5 Lamps

Alimentatore CASAMBI 60W 500mA IP20
Driver CASAMBI 60W 500mA IP20
L 124 x W 80 x H 22



E.TRA.658.500
1 Driver for 1-3 Lamps

Alimentatore ON/OFF 23W 500mA IP67
Driver ON/OFF 23W 500mA IP67
L 124 x W 47 x H 26



E.TRA.659.500
1 Driver for 1-3 Lamps

Alimentatore DALI2 23W 500mA IP67
Driver DALI2 23W 500mA IP67
L 124 x W 47 x H 26

HUB – SISTEMI DI CONNESSIONE SEMPLIFICATA CC 500mA

HUB – READY TO CONNECT SYSTEM CC 500mA



HUB.500.001.CA
1 Hub for 1-5 Lamps

Hub 500mA IP66 CASAMBI con driver 60W IP20
Hub 500mA IP66 CASAMBI with driver 60W IP20
L 235 x W 200 x H 92



HUB.500.001.DA2
1 Hub for 1-5 Lamps

Hub 500mA IP66 DALI-2 con driver 60W IP20
Hub 500mA IP66 DALI-2 with driver 60W IP20
L 235 x W 200 x H 92



HUB.500.001.ND
1 Hub for 1-5 Lamps

Hub 500mA IP66 ON/OFF con driver 60W IP20
Hub 500mA IP66 ON/OFF with driver 60W IP20
L 235 x W 200 x H 92

