





CUT 45

Incassato per effetti di luce Ø45
Recessed for light effects Ø45

DESCRIZIONE DESCRIZIONE

Cut è la nuova linea di segnapasso a luce radente nata per creare suggestivi effetti di luce ed ombra. Ideale per dare vita a percorsi luminosi residenziali o pubblici, Cut trova facile collocazione anche a parete o soffitto, rendendosi quasi invisibile ma facendo in modo che la luce e l'atmosfera create siano le protagoniste della scena. Proposto ad una, due o quattro fessure, Cut diventa l'apparecchio ideale per effetti morbidi o d'accento, per installazioni singole o in serie. Il grado di protezione IP67 ed il sistema AcquaStop per la protezione anti-condensa, infine, rendono Cut un prodotto affidabile e sicuro, ideale per suscitare emozioni di luce.

Cut is the new line of steplight born to create suggestive light and shadow effects. Ideal for creating residential or public lighting paths, Cut is easily placed on the wall or ceiling, making it almost invisible but ensuring that the light and atmosphere created are the protagonists of the scene. Offered with one, two or four slots, Cut becomes the ideal device for soft effects or accents, for single installations or in series. The IP67 protection rating and the AcquaStop system for anti-condensation protection make Cut a reliable and safe product, ideal to arouse emotions of light.

INSTALLAZIONE INSTALLATION

Incasso a terra o parete

Ground or wall recessed

CORPO BODY

Alluminio da tornitura Serie 6000 anticorodal, per maggiore resistenza alla corrosione

Anticorodal turning aluminum 6000 Series, for greater corrosion resistance

BOX BOX

Polipropilene (PP) 30% fibra stabilizzata UV GWT750

Polypropylene (PP) 30% fiber UV stabilized GWT750

SCHERMO SCREEN

Policarbonato trasparente

Transparent polycarbonate

GUARNIZIONI SEALS

EPDM

EPDM

VERNICIATURA FINISHING

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder





1 FINESTRA
1 WINDOW



4045R/WRRC1L

WATTAGGIO / WATTAGE **2W**

INTERASSE APPARECCHI /
DISTANCE BETWEEN FIXTURES **2M**



2 FINESTRE
2 WINDOWS



4045R/WRRC2L

WATTAGGIO / WATTAGE **2W**

INTERASSE APPARECCHI /
DISTANCE BETWEEN FIXTURES **2M**



4 FINESTRA
4 WINDOWS



4045R/WRRC4L

WATTAGGIO / WATTAGE **2W**

INTERASSE APPARECCHI /
DISTANCE BETWEEN FIXTURES **2M**



**CONFIG.
CODICE**
CODE
CONFIG.

▲ → **H=2700K**
W=3000K
N=4000K

**VERSIONE IN
TENSIONE**
CONSTANT
VOLTAGE

2W CON DRIVER REMOTO 24Vdc
2W REMOTE DRIVER 24Vdc

**VERSIONE IN
CORRENTE**
CONSTANT
CURRENT

2W CON DRIVER REMOTO MAX 700mA DC
2W REMOTE DRIVER MAX 700mA DC




Ø45




Ø45




Ø45



Ø35



Ø35




Ø35

IP 67

IK 08




INCASSO 1 FINESTRA Ø45**24VDC***RECESSED 1 WINDOW Ø45***24VDC**

CODICE CODE	FASCIO BEAM		WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4045R/▲RRC1L	 DIFFUSO/1 FINESTRA DIFFUSED/1 WINDOW		2W	221 lm	21 lm	24Vdc	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE


ON/OFF

INCASSO 2 FINESTRE Ø45**24VDC***RECESSED 2 WINDOWS Ø45***24VDC**

CODICE CODE	FASCIO BEAM		WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4045R/▲RRC2L	 DIFFUSO/2 FINESTRE DIFFUSED/2 WINDOWS		2W	221 lm	35 lm	24Vdc	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE

ON/OFF

INCASSO 4 FINESTRE Ø45**24VDC***RECESSED 4 WINDOWS Ø45***24VDC**

CODICE CODE	FASCIO BEAM		WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4045R/▲RRC4L	 DIFFUSO/4 FINESTRE DIFFUSED/4 WINDOWS		2W	221 lm	53 lm	24Vdc	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE

ON/OFF

ACCESSORI*ACCESSORIES*


D.BOX.030.01	CASSAFORMA INTERRATA IN POLIPROPILENE PER RIM/CUT 45 INGROUND POLYPROPYLENE FORMWORK FOR RIM/CUT 45	E.TRA.632 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20
D.BOX.032.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 45 SHORT ALUMINUM FORMWORK FOR RIM/CUT 45	E.TRA.577 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.579 1 DRIVER FOR 9-25 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF

INCASSO 1 FINESTRA Ø45**MAX 700MA***RECESSED 1 WINDOW Ø45***MAX 700MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4045R/▲RCC1L	 DIFFUSO/1 FINESTRA DIFFUSED/1 WINDOW	2W	286 lm	31 lm	max 700mA	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE


DIMMERABILE - DIMMABLE

INCASSO 2 FINESTRE Ø45**MAX 700MA***RECESSED 2 WINDOWS Ø45***MAX 700MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4045R/▲RCC2L	 DIFFUSO/2 FINESTRE DIFFUSED/2 WINDOWS	2W	286 lm	53 lm	max 700mA	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE

DIMMERABILE - DIMMABLE

INCASSO 4 FINESTRE Ø45**MAX 700MA***RECESSED 4 WINDOWS Ø45***MAX 700MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4045R/▲RCC4L	 DIFFUSO/4 FINESTRE DIFFUSED/4 WINDOWS	2W	286 lm	81 lm	max 700mA	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE

DIMMERABILE - DIMMABLE

ACCESSORI*ACCESSORIES*

D.BOX.030.01	CASSAFORMA INTERRATA IN POLIPROPILENE PER RIM/CUT 45 INGROUND POLYPROPYLENE FORMWORK FOR RIM/CUT 45	E.TRA.636.700 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE CASAMBI 60W 700MA IP20 DRIVER CASAMBI 60W 700MA IP20
D.BOX.032.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 45 SHORT ALUMINUM FORMWORK FOR RIM/CUT 45	E.TRA.658.700 1 DRIVER FOR 1-12 LAMPS	ALIMENTATORE ON/OFF 23W 700MA IP67 DRIVER ON/OFF 23W 700MA IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.659.700 1 DRIVER FOR 1-12 LAMPS	ALIMENTATORE DALI2 23W 700MA IP67 DRIVER DALI2 23W 700MA IP67
E.TRA.621.700 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 20W 700MA IP20 DRIVER ON/OFF 20W 700MA IP20	HUB.700.001.ND 1 HUB FOR 1-8 LAMPS	HUB 700MA IP66 ON/OFF CON DRIVER 60W IP20 HUB 700MA IP66 ON/OFF WITH DRIVER 60W IP20
E.TRA.623.700 1 DRIVER FOR 1-14 LAMPS	ALIMENTATORE ON/OFF 36W 700MA IP20 DRIVER ON/OFF 36W 700MA IP20	HUB.700.001.DA2 1 HUB FOR 1-8 LAMPS	HUB 700MA IP66 DALI-2 CON DRIVER 60W IP20 HUB 700MA IP66 DALI-2 WITH DRIVER 60W IP20
E.TRA.634.700 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE ON/OFF 60W 700MA IP20 DRIVER ON/OFF 60W 700MA IP20	HUB.700.001.CA 1 HUB FOR 1-8 LAMPS	HUB 700MA IP66 CASAMBI CON DRIVER 60W IP20 HUB 700MA IP66 CASAMBI WITH DRIVER 60W IP20
E.TRA.635.700 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE DALI2 60W 700MA IP20 DRIVER DALI2 60W 700MA IP20		

ACCESSORI

ACCESSORIES

BOX DA INCASSO

RECESSED BOXES



D.BOX.030.01

Cassaforma interrata in polipropilene per Rim/Cut 45
Inground polypropylene formwork for Rim/Cut 45
H 100 x Ø 115



D.BOX.032.01

Cassaforma corta in alluminio per Rim/Cut 45
Short aluminum formwork for Rim/Cut 45
H 80 x Ø 40

CONNETTORI

CONNECTORS



MOR682P/2V

Connettore IP68 2Poli/2Vie 2 x 1 mm²
Connector IP68 2Poles/2Ways 2 x 1 mm²
L 72 x Ø 22

ALIMENTATORI 24Vdc

DRIVER 24Vdc



E.TRA.577

1 Driver for 1-8 Lamps

Alimentatore ON/OFF 25W 24Vdc IP67
Driver ON/OFF 25W 24Vdc IP67
L 148 x W 40 x H 32



E.TRA.579

1 Driver for 9-25 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
L 140 x W 63 x H 32



E.TRA.631

1 Driver for 1-5 Lamps


Alimentatore ON/OFF 15W 24Vdc IP20
Driver ON/OFF 15W 24Vdc IP20
L 106 x W 33 x H 22



E.TRA.632

1 Driver for 1-20 Lamps

Alimentatore ON/OFF 70W 24Vdc IP20
Driver ON/OFF 70W 24Vdc IP20
L 124 x W 80 x H 22

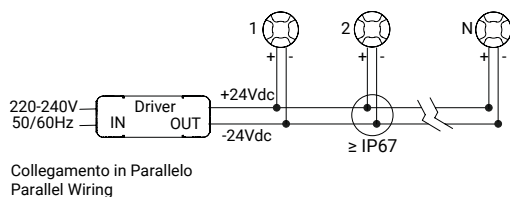

HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA 24Vdc


HUB - READY TO CONNECT SYSTEM 24Vdc



HUB.24V.001.ND


1 Hub for 1-8 Lamps

Hub 70W 24Vdc IP66 ON/OFF
Hub 70W 24Vdc IP66 ON/OFF
L 235 x W 200 x H 92



ALIMENTATORI CC – 700mA

DRIVER CC – 700mA



Collegamento in Serie
Series Wiring



E.TRA.621.700

1 Driver for 1-8 Lamps

Alimentatore ON/OFF 20W 700mA IP20

Driver ON/OFF 20W 700mA IP20

L 111 x W 52 x H 22



E.TRA.623.700

1 Driver for 1-14 Lamps

Alimentatore ON/OFF 36W 700mA IP20

Driver ON/OFF 36W 700mA IP20

L 163 x W 30 x H 21



E.TRA.634.700

1 Driver for 1-20 Lamps

Alimentatore ON/OFF 60W 700mA IP20

Driver ON/OFF 60W 700mA IP20

L 124 x W 80 x H 22



E.TRA.635.700

1 Driver for 1-20 Lamps

Alimentatore DALI2 60W 700mA IP20

Driver DALI2 60W 700mA IP20

L 124 x W 80 x H 22



E.TRA.636.700

1 Driver for 1-20 Lamps

Alimentatore CASAMBI 60W 700mA IP20

Driver CASAMBI 60W 700mA IP20

L 124 x W 80 x H 22



E.TRA.658.700

1 Driver for 1-12 Lamps

Alimentatore ON/OFF 23W 700mA IP67

Driver ON/OFF 23W 700mA IP67

L 124 x W 47 x H 26



E.TRA.659.700

1 Driver for 1-12 Lamps

Alimentatore DALI2 23W 700mA IP67

Driver DALI2 23W 700mA IP67

L 124 x W 47 x H 26

HUB – SISTEMI DI CONNESSIONE SEMPLIFICATA CC 700mA

HUB – READY TO CONNECT SYSTEM CC 700mA



HUB.700.001.CA

1 Hub for 1-8 Lamps

Hub 700mA IP66 CASAMBI con driver 60W IP20

Hub 700mA IP66 CASAMBI with driver 60W IP20

L 235 x W 200 x H 92



HUB.700.001.DA2

1 Hub for 1-8 Lamps

Hub 700mA IP66 DALI-2 con driver 60W IP20

Hub 700mA IP66 DALI-2 with driver 60W IP20

L 235 x W 200 x H 92




HUB.700.001.ND

1 Hub for 1-8 Lamps

Hub 700mA IP66 ON/OFF con driver 60W IP20

Hub 700mA IP66 ON/OFF with driver 60W IP20

L 235 x W 200 x H 92

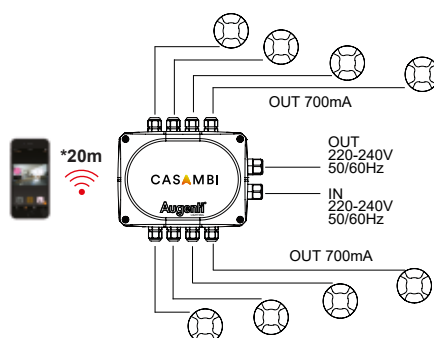





CUT 70

Incassato per effetti di luce Ø70
Recessed for light effects Ø70

DESCRIZIONE DESCRIPTION

Cut è la nuova linea di segnapasso a luce radente nata per creare suggestivi effetti di luce ed ombra. Ideale per dare vita a percorsi luminosi residenziali o pubblici, Cut trova facile collocazione anche a parete o soffitto, rendendosi quasi invisibile ma facendo in modo che la luce e l'atmosfera create siano le protagoniste della scena. Proposto ad una, due o quattro fessure, Cut diventa l'apparecchio ideale per effetti morbidi o d'accento, per installazioni singole o in serie. Il grado di protezione IP67 ed il sistema AcquaStop per la protezione anti-condensa, infine, rendono Cut un prodotto affidabile e sicuro, ideale per suscitare emozioni di luce.

Cut is the new line of steplight born to create suggestive light and shadow effects. Ideal for creating residential or public lighting paths, Cut is easily placed on the wall or ceiling, making it almost invisible but ensuring that the light and atmosphere created are the protagonists of the scene. Offered with one, two or four slots, Cut becomes the ideal device for soft effects or accents, for single installations or in series. The IP67 protection rating and the AcquaStop system for anti-condensation protection make Cut a reliable and safe product, ideal to arouse emotions of light.

INSTALLAZIONE INSTALLATION

Incasso a terra o parete

Ground or wall recessed

CORPO BODY

Alluminio da tornitura Serie 6000 anticorodal, per maggiore resistenza alla corrosione

Anticorodal turning aluminum 6000 Series, for greater corrosion resistance

BOX BOX

Polipropilene (PP) 30% fibra stabilizzata UV GWT750

Polypropylene (PP) 30% fiber UV stabilized GWT750

SCHERMO SCREEN

Policarbonato trasparente

Transparent polycarbonate

GUARNIZIONI SEALS



EPDM

EPDM

VERNICIATURA FINISHING

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder





1 FINESTRA
1 WINDOW

4070R/WRRC1L

WATTAGGIO / WATTAGE **6W**

INTERASSE APPARECCHI /
DISTANCE BETWEEN FIXTURES **2M**



2 FINESTRE
2 WINDOWS

4070R/WRRC2L

WATTAGGIO / WATTAGE **6W**

INTERASSE APPARECCHI /
DISTANCE BETWEEN FIXTURES **2M**



4 FINESTRA
4 WINDOWS

4070R/WRRC4L

WATTAGGIO / WATTAGE **6W**

INTERASSE APPARECCHI /
DISTANCE BETWEEN FIXTURES **2M**



**CONFIG.
CODICE**
CODE
CONFIG.


▲ → **H=2700K**
W=3000K
N=4000K


**VERSIONE IN
TENSIONE**
CONSTANT
VOLTAGE

6W CON DRIVER REMOTO 24Vdc
6W REMOTE DRIVER 24Vdc

**VERSIONE IN
CORRENTE**
CONSTANT
CURRENT


6W CON DRIVER REMOTO MAX 500mA DC
6W REMOTE DRIVER MAX 500mA DC

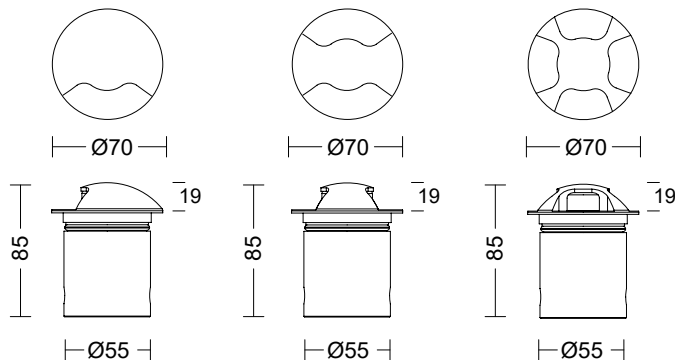

INCASSO 1 FINESTRA Ø70**24VDC***RECESSED 1 WINDOW Ø70***24VDC**


CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4070R/▲RRC1L	DIFFUSO/1 FINESTRA DIFFUSED/1 WINDOW	6W	690 lm	41 lm	24Vdc	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE
ON/OFF

INCASSO 2 FINESTRE Ø70**24VDC***RECESSED 2 WINDOWS Ø70***24VDC**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4070R/▲RRC2L	DIFFUSO/2 FINESTRE DIFFUSED/2 WINDOWS	6W	690 lm	77 lm	24Vdc	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE
ON/OFF


INCASSO 4 FINESTRE Ø70**24VDC***RECESSED 4 WINDOWS Ø70***24VDC**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4070R/▲RRC4L	DIFFUSO/4 FINESTRE DIFFUSED/4 WINDOWS	6W	690 lm	81 lm	24Vdc	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE
ON/OFF

ACCESSORI*ACCESSORIES*


A.BOX.019.01	CASSAFORMA INTERRATA IN POLICARBONATO PER RIM/CUT 70 INGROUND POLYCARBONATE FORMWORK FOR RIM/CUT 70	E.TRA.632 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20
D.BOX.033.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 70 SHORT ALUMINUM FORMWORK FOR RIM/CUT 70	E.TRA.577 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.579 1 DRIVER FOR 4-12 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-2 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF

INCASSO 1 FINESTRA Ø70**MAX 500MA***RECESSED 1 WINDOW Ø70***MAX 500MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4070R/▲RCC1L	 DIFFUSO/1 FINESTRA DIFFUSED/1 WINDOW	6W	690 lm	41 lm	max 500mA	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE


DIMMERABILE - DIMMABLE

INCASSO 2 FINESTRE Ø70**MAX 500MA***RECESSED 2 WINDOWS Ø70***MAX 500MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4070R/▲RCC2L	 DIFFUSO/2 FINESTRE DIFFUSED/2 WINDOWS	6W	690 lm	77 lm	max 500mA	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE

DIMMERABILE - DIMMABLE

INCASSO 4 FINESTRE Ø70**MAX 500MA***RECESSED 4 WINDOWS Ø70***MAX 500MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4070R/▲RCC4L	 DIFFUSO/4 FINESTRE DIFFUSED/4 WINDOWS	6W	690 lm	81 lm	max 500mA	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE

DIMMERABILE - DIMMABLE

ACCESSORI*ACCESSORIES*

A.BOX.019.01	CASSAFORMA INTERRATA IN POLICARBONATO PER RIM/CUT 70 INGROUND POLYCARBONATE FORMWORK FOR RIM/CUT 70	E.TRA.636.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE CASAMBI 60W 500MA IP20 DRIVER CASAMBI 60W 500MA IP20
D.BOX.033.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 70 SHORT ALUMINUM FORMWORK FOR RIM/CUT 70	E.TRA.658.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 23W 500MA IP67 DRIVER ON/OFF 23W 500MA IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.659.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE DALI2 23W 500MA IP67 DRIVER DALI2 23W 500MA IP67
E.TRA.621.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 20W 500MA IP20 DRIVER ON/OFF 20W 500MA IP20	HUB.500.001.ND 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 ON/OFF CON DRIVER 60W IP20 HUB 500MA IP66 ON/OFF WITH DRIVER 60W IP20
E.TRA.623.500 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 36W 500MA IP20 DRIVER ON/OFF 36W 500MA IP20	HUB.500.001.DA2 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 DALI-2 CON DRIVER 60W IP20 HUB 500MA IP66 DALI-2 WITH DRIVER 60W IP20
E.TRA.634.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 60W 500MA IP20 DRIVER ON/OFF 60W 500MA IP20	HUB.500.001.CA 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 CASAMBI CON DRIVER 60W IP20 HUB 500MA IP66 CASAMBI WITH DRIVER 60W IP20
E.TRA.635.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE DALI2 60W 500MA IP20 DRIVER DALI2 60W 500MA IP20		

ACCESSORI

ACCESSORIES

BOX DA INCASSO

RECESSED BOXES


A.BOX.019.01

Cassaforma interrata in policarbonato per Rim/Cut 70
Inground polycarbonate formwork for Rim/Cut 70
 H 110 x Ø 135


D.BOX.033.01

Cassaforma corta in alluminio per Rim/Cut 70
Short aluminum formwork for Rim/Cut 70
 H 100 x Ø 60

CONNETTORI


CONNECTORS


MOR682P/2V

Connettore IP68 2Poli/2Vie 2 x 1 mm²
Connector IP68 2Poles/2Ways 2 x 1 mm²
 L 72 x Ø 22

ALIMENTATORI 24Vdc

DRIVER 24Vdc

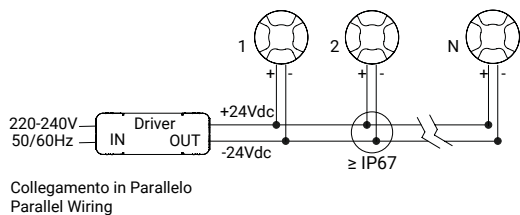
E.TRA.577

1 Driver for 1-3 Lamps

Alimentatore ON/OFF 25W 24Vdc IP67
Driver ON/OFF 25W 24Vdc IP67
 L 148 x W 40 x H 32


E.TRA.579

1 Driver for 4-12 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
 L 140 x W 63 x H 32


E.TRA.631

1 Driver for 1-2 Lamps

Alimentatore ON/OFF 15W 24Vdc IP20
Driver ON/OFF 15W 24Vdc IP20
 L 106 x W 33 x H 22


E.TRA.632

1 Driver for 1-8 Lamps

Alimentatore ON/OFF 70W 24Vdc IP20
Driver ON/OFF 70W 24Vdc IP20
 L 124 x W 80 x H 22


HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA 24Vdc

HUB - READY TO CONNECT SYSTEM 24Vdc


HUB.24V.001.ND


1 Hub for 1-8 Lamps

Hub 70W 24Vdc IP66 ON/OFF
Hub 70W 24Vdc IP66 ON/OFF
 L 235 x W 200 x H 92



ALIMENTATORI CC – 500mA

DRIVER CC – 500mA

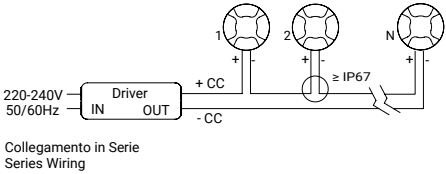

E.TRA.621.500
1 Driver for 1-3 Lamps

Alimentatore ON/OFF 20W 500mA IP20
Driver ON/OFF 20W 500mA IP20
L 111 x W 52 x H 22



E.TRA.623.500
1 Driver for 1-4 Lamps

Alimentatore ON/OFF 36W 500mA IP20
Driver ON/OFF 36W 500mA IP20
L 163 x W 30 x H 21



E.TRA.634.500
1 Driver for 1-5 Lamps

Alimentatore ON/OFF 60W 500mA IP20
Driver ON/OFF 60W 500mA IP20
L 124 x W 80 x H 22



E.TRA.635.500
1 Driver for 1-5 Lamps

Alimentatore DALI2 60W 500mA IP20
Driver DALI2 60W 500mA IP20
L 124 x W 80 x H 22



E.TRA.636.500
1 Driver for 1-5 Lamps

Alimentatore CASAMBI 60W 500mA IP20
Driver CASAMBI 60W 500mA IP20
L 124 x W 80 x H 22



E.TRA.658.500
1 Driver for 1-3 Lamps

Alimentatore ON/OFF 23W 500mA IP67
Driver ON/OFF 23W 500mA IP67
L 124 x W 47 x H 26



E.TRA.659.500
1 Driver for 1-3 Lamps

Alimentatore DALI2 23W 500mA IP67
Driver DALI2 23W 500mA IP67
L 124 x W 47 x H 26

HUB – SISTEMI DI CONNESSIONE SEMPLIFICATA CC 500mA

HUB – READY TO CONNECT SYSTEM CC 500mA



HUB.500.001.CA
1 Hub for 1-5 Lamps

Hub 500mA IP66 CASAMBI con driver 60W IP20
Hub 500mA IP66 CASAMBI with driver 60W IP20
L 235 x W 200 x H 92




HUB.500.001.DA2
1 Hub for 1-5 Lamps


Hub 500mA IP66 DALI-2 con driver 60W IP20
Hub 500mA IP66 DALI-2 with driver 60W IP20
L 235 x W 200 x H 92



HUB.500.001.ND
1 Hub for 1-5 Lamps

Hub 500mA IP66 ON/OFF con driver 60W IP20
Hub 500mA IP66 ON/OFF with driver 60W IP20
L 235 x W 200 x H 92

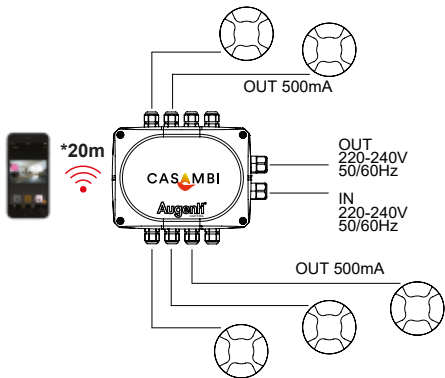

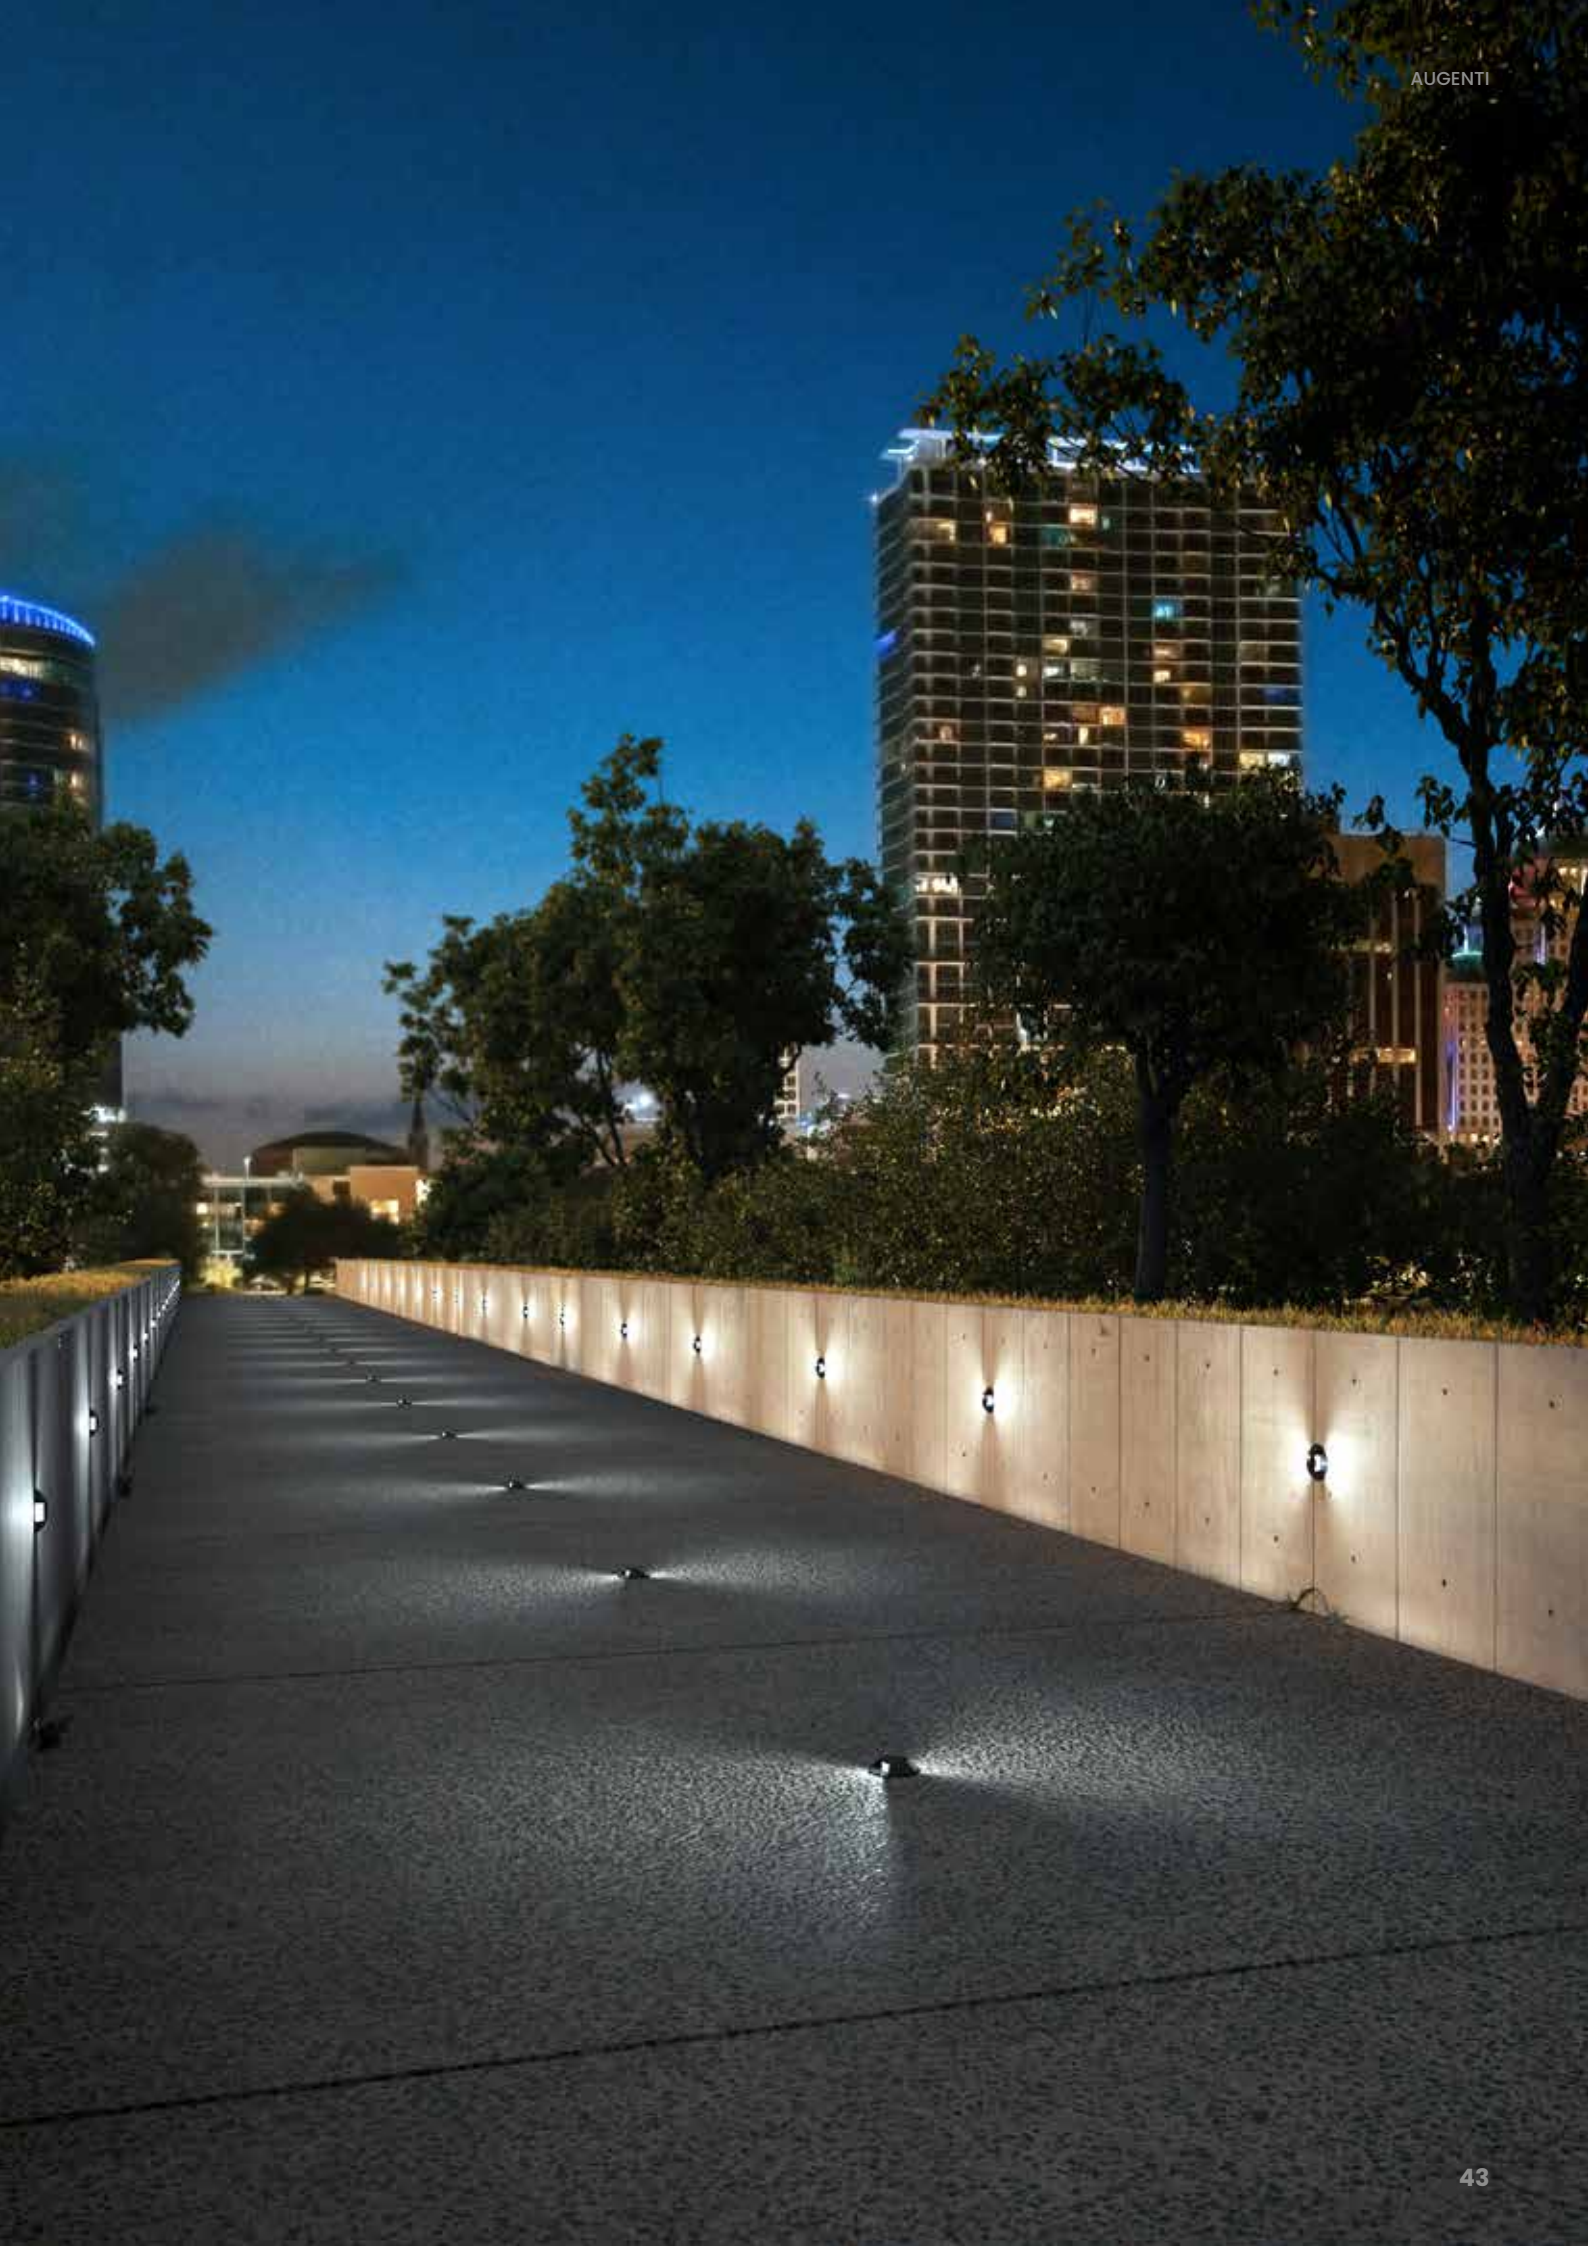



RIM 45

Incassato con ghiera in acciaio Ø45
Recessed with steel ring nut Ø45

DESCRIZIONE DESCRIPTION

Rim, l'ultimo nato tra gli incassati Augenti, è un piccolo ma performante apparecchio da incasso con anello in acciaio. Le dimensioni ridotte e l'installazione semplice e veloce ne permettono la collocazione in ambienti esterni o interni. Rim può infatti essere installato a pavimento, parete o soffitto, integrandosi in modo discreto nell'ambiente, lasciando che la luce e l'atmosfera generate siano gli elementi principali della scena. I fasci proposti sono ideali per effetti morbidi o d'accento, per installazioni singole o in serie. L'anello in acciaio inox 316L ed il sistema AcquaStop per la protezione anti-condensa, rendono Rim un prodotto sicuro e poliedrico, ideale per dare luce alla vostra fantasia.

Rim, the latest of the Augenti recessed models, is a small but powerful recessed appliance with steel ring. The small size and quick and easy installation allow it to be placed in outdoor or indoor environments. Rim can be installed on the floor, wall or ceiling, integrating discreetly into the environment, leaving the light and atmosphere generated to be the main elements of the scene. The proposed beams are ideal for soft or accent effects, for single installations or in series. The 316L stainless steel ring and the AcquaStop system for anti-condensation protection, make Rim a safe and versatile product, ideal to give light to your imagination.

INSTALLAZIONE INSTALLATION

Incasso a terra, parete o soffitto

Ground, wall or ceiling recessed

CORPO BODY

Alluminio da tornitura Serie 6000 anticorrosione, per maggiore resistenza alla corrosione

Anticorrosion turning aluminum 6000 Series, for greater corrosion resistance

BOX BOX

Polipropilene (PP) 30% fibra stabilizzata UV GWT750

Polypropylene (PP) 30% fiber UV stabilized GWT750

SCHERMO SCREEN

Vetro extrachiaro temprato 6 mm

Extra clear tempered glass 6 mm

GUARNIZIONI SEALS

EPDM

EPDM

CORNICE FRAME

Acciaio satinato AISI316L

Stainless steel AISI316L

VERNICIATURA FINISHING

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder





**FASCIO
STRETTO 14°**

NARROW
BEAM 14°

3045R/NRRCNB99

WATTAGGIO / WATTAGE **2W**

ALTEZZA PARETE / WALL HEIGHT **5M**

DISTANZA DA PARETE /
DISTANCE FROM WALL **10CM**

INTERASSE APPARECCHI /
DISTANCE BETWEEN FIXTURES **4M**



**FASCIO
MEDIO 30°**

MEDIUM
BEAM 30°

3045R/NRRCMB99

WATTAGGIO / WATTAGE **2W**

ALTEZZA PARETE / WALL HEIGHT **5M**

DISTANZA DA PARETE /
DISTANCE FROM WALL **10CM**

INTERASSE APPARECCHI /
DISTANCE BETWEEN FIXTURES **4M**



**FASCIO
LARGO 40°**

WIDE
BEAM 40°

3045R/NRRCWB99

WATTAGGIO / WATTAGE **2W**

ALTEZZA PARETE / WALL HEIGHT **5M**

DISTANZA DA PARETE /
DISTANCE FROM WALL **10CM**

INTERASSE APPARECCHI /
DISTANCE BETWEEN FIXTURES **4M**



**CONFIG.
CODICE**
CODE
CONFIG.


▲ → **H=2700K**
W=3000K
N=4000K

**VERSIONE IN
TENSIONE**
CONSTANT
VOLTAGE

2W CON DRIVER REMOTO 24Vdc
2W REMOTE DRIVER 24Vdc

**VERSIONE IN
CORRENTE**
CONSTANT
CURRENT

2W CON DRIVER REMOTO MAX 700mA DC
2W REMOTE DRIVER MAX 700mA DC



RIM 45

INCASSO CON GHIERA IN ACCIAIO Ø45

24VDC

RECESSED WITH STEEL RING NUT Ø45

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3045R/▲RRCNB99	 STRETTO/14° NARROW/14°	2W	270 lm	220 lm	24Vdc	III	67	08	80
3045R/▲RRCMB99	 MEDIO/30° MEDIUM/30°	2W	270 lm	210 lm	24Vdc	III	67	08	80
3045R/▲RRCWB99	 LARGO/40° WIDE/40°	2W	270 lm	210 lm	24Vdc	III	67	08	80
3045R/▲RRCSW99	 MOLTO LARGO/60° SUPER WIDE/60°	2W	270 lm	210 lm	24Vdc	III	67	08	80
3045R/▲RRCOB199	 OVALE/15°X60° OVAL/15°X60°	2W	270 lm	210 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 6 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 6 MM

ON/OFF

INCASSO CON GHIERA IN ACCIAIO VETRO OPALE Ø45

24VDC

RECESSED WITH STEEL RING NUT OPAL GLASS Ø45

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3045R/▲RRCVS99	 DIFFUSO/120° DIFFUSED/120°	2W	270 lm	28 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 6 MM - EXTRA CLEAR OPAL TEMPERED GLASS 6 MM

ON/OFF

ACCESSORI

ACCESSORIES

D.BOX.030.01	CASSAFORMA INTERRATA IN POLIPROPILENE PER RIM/CUT 45 INGROUND POLYPROPYLENE FORMWORK FOR RIM/CUT 45	E.TRA.632 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20
D.BOX.032.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 45 SHORT ALUMINUM FORMWORK FOR RIM/CUT 45	E.TRA.577 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.579 1 DRIVER FOR 9-25 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF

INCASSO CON GHIERA IN ACCIAIO Ø45**MAX 700MA***RECESSED WITH STEEL RING NUT Ø45***MAX 700MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3045R/▲RCCNB99	STRETTO/14° NARROW/14°	2W	300 lm	240 lm	max 700mA	III	67	08	80
3045R/▲RCCMB99	MEDIO/30° MEDIUM/30°	2W	300 lm	230 lm	max 700mA	III	67	08	80
3045R/▲RCCWB99	LARGO/40° WIDE/40°	2W	300 lm	230 lm	max 700mA	III	67	08	80
3045R/▲RCCSW99	MOLTO LARGO/60° SUPER WIDE/60°	2W	300 lm	230 lm	max 700mA	III	67	08	80
3045R/▲RCCOB199	OVALE/15°X60° OVAL/15°X60°	2W	300 lm	230 lm	max 700mA	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 6 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 6 MM

DIMMERABILE - DIMMABLE

INCASSO CON GHIERA IN ACCIAIO VETRO OPALE Ø45**MAX 700MA***RECESSED WITH STEEL RING NUT OPAL GLASS Ø45***MAX 700MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3045R/▲RCCVS99	DIFFUSO/120° DIFFUSED/120°	2W	300 lm	32 lm	max 700mA	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 6 MM - EXTRA CLEAR OPAL TEMPERED GLASS 6 MM

DIMMERABILE - DIMMABLE

ACCESSORI*ACCESSORIES*

D.BOX.030.01	CASSAFORMA INTERRATA IN POLIPROPILENE PER RIM/CUT 45 INGROUND POLYPROPYLENE FORMWORK FOR RIM/CUT 45	E.TRA.636.700 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE CASAMBI 60W 700MA IP20 DRIVER CASAMBI 60W 700MA IP20
D.BOX.032.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 45 SHORT ALUMINUM FORMWORK FOR RIM/CUT 45	E.TRA.658.700 1 DRIVER FOR 1-12 LAMPS	ALIMENTATORE ON/OFF 23W 700MA IP67 DRIVER ON/OFF 23W 700MA IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.659.700 1 DRIVER FOR 1-12 LAMPS	ALIMENTATORE DALI2 23W 700MA IP67 DRIVER DALI2 23W 700MA IP67
E.TRA.621.700 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 20W 700MA IP20 DRIVER ON/OFF 20W 700MA IP20	HUB.700.001.ND 1 HUB FOR 1-8 LAMPS	HUB 700MA IP66 ON/OFF CON DRIVER 60W IP20 HUB 700MA IP66 ON/OFF WITH DRIVER 60W IP20
E.TRA.623.700 1 DRIVER FOR 1-14 LAMPS	ALIMENTATORE ON/OFF 36W 700MA IP20 DRIVER ON/OFF 36W 700MA IP20	HUB.700.001.DA2 1 HUB FOR 1-8 LAMPS	HUB 700MA IP66 DALI-2 CON DRIVER 60W IP20 HUB 700MA IP66 DALI-2 WITH DRIVER 60W IP20
E.TRA.634.700 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE ON/OFF 60W 700MA IP20 DRIVER ON/OFF 60W 700MA IP20	HUB.700.001.CA 1 HUB FOR 1-8 LAMPS	HUB 700MA IP66 CASAMBI CON DRIVER 60W IP20 HUB 700MA IP66 CASAMBI WITH DRIVER 60W IP20
E.TRA.635.700 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE DALI2 60W 700MA IP20 DRIVER DALI2 60W 700MA IP20		

RIM 45 PAINTED

INCASSO CON GHIERA IN ACCIAIO VERNICIATO Ø45

24VDC

RECESSED WITH PAINTED STEEL RING NUT Ø45

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3045R/▲RRCNB	 STRETTO/14° NARROW/14°	2W	270 lm	220 lm	24Vdc	III	67	08	80
3045R/▲RRCMB	 MEDIO/30° MEDIUM/30°	2W	270 lm	210 lm	24Vdc	III	67	08	80
3045R/▲RRCWB	 LARGO/40° WIDE/40°	2W	270 lm	210 lm	24Vdc	III	67	08	80
3045R/▲RRCSW	 MOLTO LARGO/60° SUPER WIDE/60°	2W	270 lm	210 lm	24Vdc	III	67	08	80
3045R/▲RRCOB1	 OVALE/15°X60° OVAL/15°X60°	2W	270 lm	210 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 6 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 6 MM

ON/OFF

INCASSO CON GHIERA IN ACCIAIO VERNICIATO VETRO OPALE Ø45

24VDC

RECESSED WITH PAINTED STEEL RING NUT OPAL GLASS Ø45

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3045R/▲RRCVS	 DIFFUSO/120° DIFFUSED/120°	2W	270 lm	28 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 6 MM - EXTRA CLEAR OPAL TEMPERED GLASS 6 MM

ON/OFF

ACCESSORI

ACCESSORIES

D.BOX.030.01	CASSAFORMA INTERRATA IN POLIPROPILENE PER RIM/CUT 45 INGROUND POLYPROPYLENE FORMWORK FOR RIM/CUT 45	E.TRA.632 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20
D.BOX.032.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 45 SHORT ALUMINUM FORMWORK FOR RIM/CUT 45	E.TRA.577 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.579 1 DRIVER FOR 9-25 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF

INCASSO CON GHIERA IN ACCIAIO VERNICIATO Ø45**MAX 700MA***RECESSED WITH PAINTED STEEL RING NUT Ø45***MAX 700MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3045R/▲RCCNB	STRETTO/14° NARROW/14°	2W	300 lm	240 lm	max 700mA	III	67	08	80
3045R/▲RCCMB	MEDIO/30° MEDIUM/30°	2W	300 lm	230 lm	max 700mA	III	67	08	80
3045R/▲RCCWB	LARGO/40° WIDE/40°	2W	300 lm	230 lm	max 700mA	III	67	08	80
3045R/▲RCCSW	MOLTO LARGO/60° SUPER WIDE/60°	2W	300 lm	230 lm	max 700mA	III	67	08	80
3045R/▲RCCOBI	OVALE/15°X60° OVAL/15°X60°	2W	300 lm	230 lm	max 700mA	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 6 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 6 MM

DIMMERABILE - DIMMABLE

INCASSO CON GHIERA IN ACCIAIO VERNICIATO VETRO OPALE Ø45**MAX 700MA***RECESSED WITH PAINTED STEEL RING NUT OPAL GLASS Ø45***MAX 700MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3045R/▲RCCVS	DIFFUSO/120° DIFFUSED/120°	2W	300 lm	32 lm	max 700mA	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 6 MM - EXTRA CLEAR OPAL TEMPERED GLASS 6 MM

DIMMERABILE - DIMMABLE

ACCESSORI*ACCESSORIES*

D.BOX.030.01	CASSAFORMA INTERRATA IN POLIPROPILENE PER RIM/CUT 45 INGROUND POLYPROPYLENE FORMWORK FOR RIM/CUT 45	E.TRA.636.700 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE CASAMBI 60W 700MA IP20 DRIVER CASAMBI 60W 700MA IP20
D.BOX.032.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 45 SHORT ALUMINUM FORMWORK FOR RIM/CUT 45	E.TRA.658.700 1 DRIVER FOR 1-12 LAMPS	ALIMENTATORE ON/OFF 23W 700MA IP67 DRIVER ON/OFF 23W 700MA IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.659.700 1 DRIVER FOR 1-12 LAMPS	ALIMENTATORE DALI2 23W 700MA IP67 DRIVER DALI2 23W 700MA IP67
E.TRA.621.700 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 20W 700MA IP20 DRIVER ON/OFF 20W 700MA IP20	HUB.700.001.ND 1 HUB FOR 1-8 LAMPS	HUB 700MA IP66 ON/OFF CON DRIVER 60W IP20 HUB 700MA IP66 ON/OFF WITH DRIVER 60W IP20
E.TRA.623.700 1 DRIVER FOR 1-14 LAMPS	ALIMENTATORE ON/OFF 36W 700MA IP20 DRIVER ON/OFF 36W 700MA IP20	HUB.700.001.DA2 1 HUB FOR 1-8 LAMPS	HUB 700MA IP66 DALI-2 CON DRIVER 60W IP20 HUB 700MA IP66 DALI-2 WITH DRIVER 60W IP20
E.TRA.634.700 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE ON/OFF 60W 700MA IP20 DRIVER ON/OFF 60W 700MA IP20	HUB.700.001.CA 1 HUB FOR 1-8 LAMPS	HUB 700MA IP66 CASAMBI CON DRIVER 60W IP20 HUB 700MA IP66 CASAMBI WITH DRIVER 60W IP20
E.TRA.635.700 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE DALI2 60W 700MA IP20 DRIVER DALI2 60W 700MA IP20		

ACCESSORI

ACCESSORIES

BOX DA INCASSO

RECESSED BOXES



D.BOX.030.01

Cassaforma interrata in polipropilene per Rim/Cut 45
Inground polypropylene formwork for Rim/Cut 45
H 100 x Ø 115



D.BOX.032.01

Cassaforma corta in alluminio per Rim/Cut 45
Short aluminum formwork for Rim/Cut 45
H 80 x Ø 40

CONNETTORI

CONNECTORS



MOR682P/2V

Connettore IP68 2Poli/2Vie 2 x 1 mm²
Connector IP68 2Poles/2Ways 2 x 1 mm²
L 72 x Ø 22

ALIMENTATORI 24Vdc

DRIVER 24Vdc



E.TRA.577

1 Driver for 1-8 Lamps

Alimentatore ON/OFF 25W 24Vdc IP67
Driver ON/OFF 25W 24Vdc IP67
L 148 x W 40 x H 32



E.TRA.579

1 Driver for 9-25 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
L 140 x W 63 x H 32



E.TRA.631

1 Driver for 1-5 Lamps


Alimentatore ON/OFF 15W 24Vdc IP20
Driver ON/OFF 15W 24Vdc IP20
L 106 x W 33 x H 22



E.TRA.632

1 Driver for 1-20 Lamps

Alimentatore ON/OFF 70W 24Vdc IP20
Driver ON/OFF 70W 24Vdc IP20
L 124 x W 80 x H 22

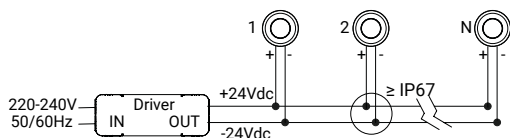

Collegamento in Parallelo
Parallel Wiring

HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA 24Vdc


HUB - READY TO CONNECT SYSTEM 24Vdc



HUB.24V.001.ND


1 Hub for 1-8 Lamps

Hub 70W 24Vdc IP66 ON/OFF
Hub 70W 24Vdc IP66 ON/OFF
L 235 x W 200 x H 92



ALIMENTATORI CC – 700mA

DRIVER CC – 700mA



Collegamento in Serie
Series Wiring



E.TRA.621.700
1 Driver for 1-8 Lamps

Alimentatore ON/OFF 20W 700mA IP20
Driver ON/OFF 20W 700mA IP20
L 111 x W 52 x H 22



E.TRA.623.700
1 Driver for 1-14 Lamps

Alimentatore ON/OFF 36W 700mA IP20
Driver ON/OFF 36W 700mA IP20
L 163 x W 30 x H 21



E.TRA.634.700
1 Driver for 1-20 Lamps

Alimentatore ON/OFF 60W 700mA IP20
Driver ON/OFF 60W 700mA IP20
L 124 x W 80 x H 22



E.TRA.635.700
1 Driver for 1-20 Lamps

Alimentatore DALI2 60W 700mA IP20
Driver DALI2 60W 700mA IP20
L 124 x W 80 x H 22



E.TRA.636.700
1 Driver for 1-20 Lamps

Alimentatore CASAMBI 60W 700mA IP20
Driver CASAMBI 60W 700mA IP20
L 124 x W 80 x H 22



E.TRA.658.700
1 Driver for 1-12 Lamps

Alimentatore ON/OFF 23W 700mA IP67
Driver ON/OFF 23W 700mA IP67
L 124 x W 47 x H 26



E.TRA.659.700
1 Driver for 1-12 Lamps

Alimentatore DALI2 23W 700mA IP67
Driver DALI2 23W 700mA IP67
L 124 x W 47 x H 26

HUB – SISTEMI DI CONNESSIONE SEMPLIFICATA CC 700mA

HUB – READY TO CONNECT SYSTEM CC 700mA



HUB.700.001.CA
1 Hub for 1-8 Lamps

Hub 700mA IP66 CASAMBI con driver 60W IP20
Hub 700mA IP66 CASAMBI with driver 60W IP20
L 235 x W 200 x H 92




HUB.700.001.DA2
1 Hub for 1-8 Lamps

Hub 700mA IP66 DALI-2 con driver 60W IP20
Hub 700mA IP66 DALI-2 with driver 60W IP20
L 235 x W 200 x H 92



HUB.700.001.ND
1 Hub for 1-8 Lamps

Hub 700mA IP66 ON/OFF con driver 60W IP20
Hub 700mA IP66 ON/OFF with driver 60W IP20
L 235 x W 200 x H 92

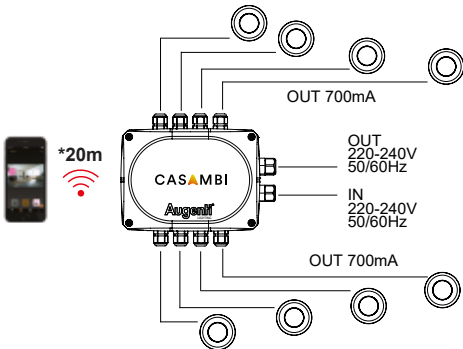





RIM 70

Incassato con ghiera in acciaio Ø70
Recessed with steel ring nut Ø70

DESCRIZIONE DESCRIPTION

Rim, l'ultimo nato tra gli incassati Augenti, è un piccolo ma performante apparecchio da incasso con anello in acciaio. Le dimensioni ridotte e l'installazione semplice e veloce ne permettono la collocazione in ambienti esterni o interni. Rim può infatti essere installato a pavimento, parete o soffitto, integrandosi in modo discreto nell'ambiente, lasciando che la luce e l'atmosfera generate siano gli elementi principali della scena. I fasci proposti sono ideali per effetti morbidi o d'accento, per installazioni singole o in serie. L'anello in acciaio inox 316L ed il sistema AcquaStop per la protezione anti-condensa, rendono Rim un prodotto sicuro e poliedrico, ideale per dare luce alla vostra fantasia.

Rim, the latest of the Augenti recessed models, is a small but powerful recessed appliance with steel ring. The small size and quick and easy installation allow it to be placed in outdoor or indoor environments. Rim can be installed on the floor, wall or ceiling, integrating discreetly into the environment, leaving the light and atmosphere generated to be the main elements of the scene. The proposed beams are ideal for soft or accent effects, for single installations or in series. The 316L stainless steel ring and the AcquaStop system for anti-condensation protection, make Rim a safe and versatile product, ideal to give light to your imagination.

INSTALLAZIONE INSTALLATION

Incasso a terra, parete o soffitto

Ground, wall or ceiling recessed

CORPO BODY

Alluminio da tornitura Serie 6000 anticorrosione, per maggiore resistenza alla corrosione

Anticorrosion turning aluminum 6000 Series, for greater corrosion resistance

BOX BOX

Polipropilene (PP) 30% fibra stabilizzata UV GWT750

Polypropylene (PP) 30% fiber UV stabilized GWT750

SCHERMO SCREEN

Vetro extrachiaro temprato 6 mm

Extra clear tempered glass 6 mm

GUARNIZIONI SEALS

EPDM

EPDM

CORNICE FRAME

Acciaio satinato AISI316L


Stainless steel AISI316L

VERNICIATURA FINISHING

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder



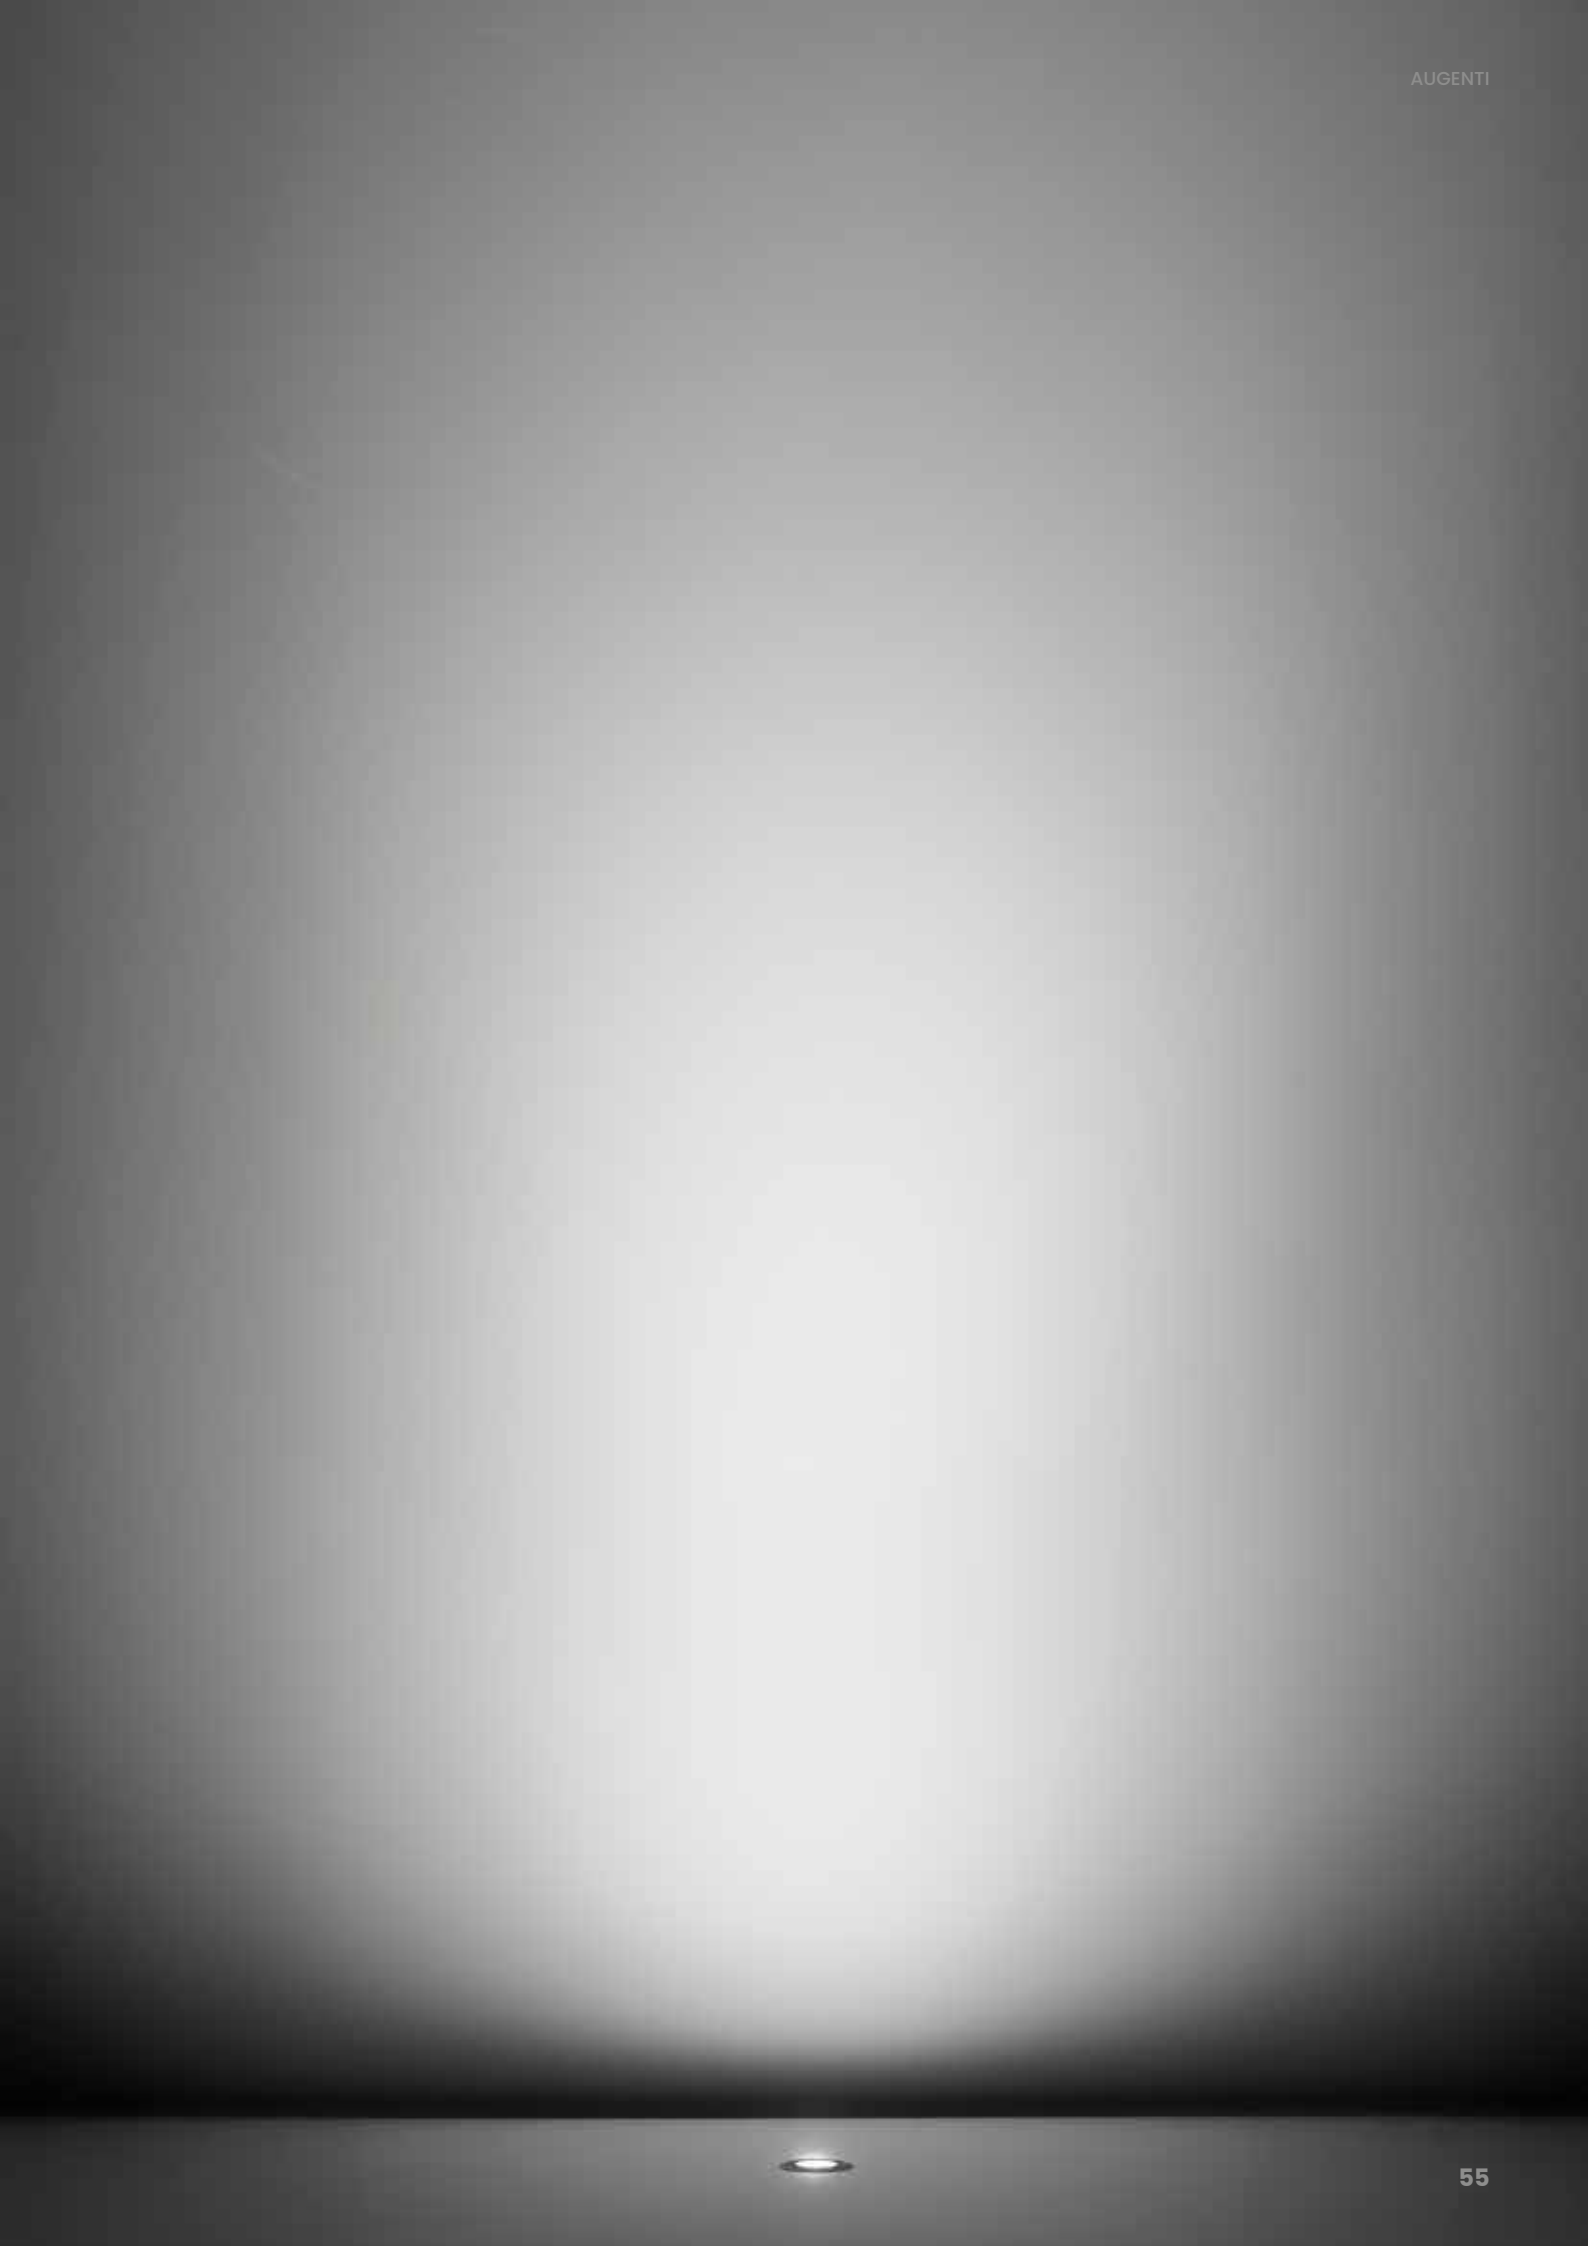

**FASCIO
STRETTO 10°**

NARROW
BEAM 10°

3070R/NRRCNB99

WATTAGGIO / WATTAGE **6W**

ALTEZZA PARETE / WALL HEIGHT **5M**

DISTANZA DA PARETE /
DISTANCE FROM WALL **10CM**

INTERASSE APPARECCHI /
DISTANCE BETWEEN FIXTURES **4M**



**FASCIO
MEDIO 24°**

MEDIUM
BEAM 24°

3070R/NRRCMB99

WATTAGGIO / WATTAGE **6W**

ALTEZZA PARETE / WALL HEIGHT **5M**

DISTANZA DA PARETE /
DISTANCE FROM WALL **10CM**

INTERASSE APPARECCHI /
DISTANCE BETWEEN FIXTURES **4M**



**FASCIO
LARGO 36°**

WIDE
BEAM 36°

3070R/NRRCWB99

WATTAGGIO / WATTAGE **6W**

ALTEZZA PARETE / WALL HEIGHT **5M**

DISTANZA DA PARETE /
DISTANCE FROM WALL **10CM**

INTERASSE APPARECCHI /
DISTANCE BETWEEN FIXTURES **4M**



**CONFIG.
CODICE**
CODE
CONFIG.


▲ → **H=2700K**
W=3000K
N=4000K

**VERSIONE IN
TENSIONE**
CONSTANT
VOLTAGE

6W CON DRIVER REMOTO 24Vdc
6W REMOTE DRIVER 24Vdc

**VERSIONE IN
CORRENTE**
CONSTANT
CURRENT

6W CON DRIVER REMOTO MAX 500mA DC
6W REMOTE DRIVER MAX 500mA DC

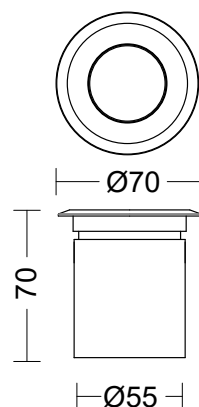

RIM 70

INCASSO CON GHIERA IN ACCIAIO Ø70

24VDC

RECESSED WITH STEEL RING NUT Ø70

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3070R/▲RRCNB99	 STRETTO/10° NARROW/10°	6W	690 lm	520 lm	24Vdc	III	67	08	80
3070R/▲RRCMB99	 MEDIO/24° MEDIUM/24°	6W	690 lm	510 lm	24Vdc	III	67	08	80
3070R/▲RRCWB99	 LARGO/36° WIDE/36°	6W	690 lm	505 lm	24Vdc	III	67	08	80
3070R/▲RRCSW99	 MOLTO LARGO/60° SUPER WIDE/60°	6W	690 lm	508 lm	24Vdc	III	67	08	80
3070R/▲RRCOB99	 OVALE/15°X55° OVAL/15°X55°	6W	690 lm	554 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

ON/OFF

INCASSO CON GHIERA IN ACCIAIO VETRO OPALE Ø70

24VDC

RECESSED WITH STEEL RING NUT OPAL GLASS Ø70

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3070R/▲RRCVS99	 DIFFUSO/120° DIFFUSED/120°	6W	690 lm	70 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

ON/OFF

ACCESSORI

ACCESSORIES

A.BOX.019.01	CASSAFORMA INTERRATA IN POLICARBONATO PER RIM/CUT 70 INGROUND POLICARBONATE FORMWORK FOR RIM/CUT 70	E.TRA.632 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20
D.BOX.033.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 70 SHORT ALUMINUM FORMWORK FOR RIM/CUT 70	E.TRA.577 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.579 1 DRIVER FOR 4-12 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-2 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF

INCASSO CON GHIERA IN ACCIAIO Ø70**MAX 500MA***RECESSED WITH STEEL RING NUT Ø70***MAX 500MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3070R/▲RCCNB99	STRETTO/10° NARROW/10°	6W	690 lm	520 lm	max 500mA	III	67	08	80
3070R/▲RCCMB99	MEDIO/24° MEDIUM/24°	6W	690 lm	510 lm	max 500mA	III	67	08	80
3070R/▲RCCWB99	LARGO/36° WIDE/36°	6W	690 lm	505 lm	max 500mA	III	67	08	80
3070R/▲RCCSW99	MOLTO LARGO/60° SUPER WIDE/60°	6W	690 lm	508 lm	max 500mA	III	67	08	80
3070R/▲RCCOB99	OVALE/15°X55° OVAL/15°X55°	6W	690 lm	554 lm	max 500mA	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

INCASSO CON GHIERA IN ACCIAIO VETRO OPALE Ø70**MAX 500MA***RECESSED WITH STEEL RING NUT OPAL GLASS Ø70***MAX 500MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3070R/▲RCCVS99	DIFFUSO/120° DIFFUSED/120°	6W	690 lm	70 lm	max 500mA	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

ACCESSORI*ACCESSORIES*

A.BOX.019.01	CASSAFORMA INTERRATA IN POLICARBONATO PER RIM/CUT 70 INGROUND POLICARBONATE FORMWORK FOR RIM/CUT 70	E.TRA.636.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE CASAMBI 60W 500MA IP20 DRIVER CASAMBI 60W 500MA IP20
D.BOX.033.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 70 SHORT ALUMINUM FORMWORK FOR RIM/CUT 70	E.TRA.658.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 23W 500MA IP67 DRIVER ON/OFF 23W 500MA IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.659.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE DALI2 23W 500MA IP67 DRIVER DALI2 23W 500MA IP67
E.TRA.621.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 20W 500MA IP20 DRIVER ON/OFF 20W 500MA IP20	HUB.500.001.ND 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 ON/OFF CON DRIVER 60W IP20 HUB 500MA IP66 ON/OFF WITH DRIVER 60W IP20
E.TRA.623.500 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 36W 500MA IP20 DRIVER ON/OFF 36W 500MA IP20	HUB.500.001.DA2 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 DALI-2 CON DRIVER 60W IP20 HUB 500MA IP66 DALI-2 WITH DRIVER 60W IP20
E.TRA.634.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 60W 500MA IP20 DRIVER ON/OFF 60W 500MA IP20	HUB.500.001.CA 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 CASAMBI CON DRIVER 60W IP20 HUB 500MA IP66 CASAMBI WITH DRIVER 60W IP20
E.TRA.635.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE DALI2 60W 500MA IP20 DRIVER DALI2 60W 500MA IP20		

RIM 70 PAINTED

INCASSO CON GHIERA IN ACCIAIO VERNICIATO Ø70

24VDC

RECESSED WITH PAINTED STEEL RING NUT Ø70

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3070R/▲RRCNB	 STRETTO/10° NARROW/10°	6W	690 lm	520 lm	24Vdc	III	67	08	80
3070R/▲RRCMB	 MEDIO/24° MEDIUM/24°	6W	690 lm	510 lm	24Vdc	III	67	08	80
3070R/▲RRCWB	 LARGO/36° WIDE/36°	6W	690 lm	505 lm	24Vdc	III	67	08	80
3070R/▲RRCSW	 MOLTO LARGO/60° SUPER WIDE/60°	6W	690 lm	508 lm	24Vdc	III	67	08	80
3070R/▲RRCOB	 OVALE/15°X55° OVAL/15°X55°	6W	690 lm	554 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

ON/OFF

INCASSO CON GHIERA IN ACCIAIO VERNICIATO VETRO OPALE Ø70

24VDC

RECESSED WITH PAINTED STEEL RING NUT OPAL GLASS Ø70

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3070R/▲RRCVS	 DIFFUSO/120° DIFFUSED/120°	6W	690 lm	70 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

ON/OFF

ACCESSORI

ACCESSORIES

A.BOX.019.01	CASSAFORMA INTERRATA IN POLICARBONATO PER RIM/CUT 70 INGROUND POLICARBONATE FORMWORK FOR RIM/CUT 70	E.TRA.632 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20
D.BOX.033.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 70 SHORT ALUMINUM FORMWORK FOR RIM/CUT 70	E.TRA.577 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.579 1 DRIVER FOR 4-12 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-2 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF

INCASSO CON GHIERA IN ACCIAIO VERNICIATO Ø70**MAX 500MA***RECESSED WITH PAINTED STEEL RING NUT Ø70***MAX 500MA**

CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
3070R/▲RCCNB	STRETTO/10° <i>NARROW/10°</i>	6W	690 lm	520 lm	max 500mA	III	67	08	80
3070R/▲RCCMB	MEDIO/24° <i>MEDIUM/24°</i>	6W	690 lm	510 lm	max 500mA	III	67	08	80
3070R/▲RCCWB	LARGO/36° <i>WIDE/36°</i>	6W	690 lm	505 lm	max 500mA	III	67	08	80
3070R/▲RCCSW	MOLTO LARGO/60° <i>SUPER WIDE/60°</i>	6W	690 lm	508 lm	max 500mA	III	67	08	80
3070R/▲RCCOB	OVALE/15°X55° <i>OVAL/15°X55°</i>	6W	690 lm	554 lm	max 500mA	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

INCASSO CON GHIERA IN ACCIAIO VERNICIATO VETRO OPALE Ø70**MAX 500MA***RECESSED WITH PAINTED STEEL RING NUT OPAL GLASS Ø70***MAX 500MA**

CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
3070R/▲RCCVS	DIFFUSO/120° <i>DIFFUSED/120°</i>	6W	690 lm	70 lm	max 500mA	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

ACCESSORI*ACCESSORIES*

A.BOX.019.01	CASSAFORMA INTERRATA IN POLICARBONATO PER RIM/CUT 70 <i>INGROUND POLICARBONATE FORMWORK FOR RIM/CUT 70</i>	E.TRA.636.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE CASAMBI 60W 500MA IP20 DRIVER CASAMBI 60W 500MA IP20
D.BOX.033.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 70 <i>SHORT ALUMINUM FORMWORK FOR RIM/CUT 70</i>	E.TRA.658.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 23W 500MA IP67 DRIVER ON/OFF 23W 500MA IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² <i>CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²</i>	E.TRA.659.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE DALI2 23W 500MA IP67 DRIVER DALI2 23W 500MA IP67
E.TRA.621.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 20W 500MA IP20 DRIVER ON/OFF 20W 500MA IP20	HUB.500.001.ND 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 ON/OFF CON DRIVER 60W IP20 HUB 500MA IP66 ON/OFF WITH DRIVER 60W IP20
E.TRA.623.500 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 36W 500MA IP20 DRIVER ON/OFF 36W 500MA IP20	HUB.500.001.DA2 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 DALI-2 CON DRIVER 60W IP20 HUB 500MA IP66 DALI-2 WITH DRIVER 60W IP20
E.TRA.634.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 60W 500MA IP20 DRIVER ON/OFF 60W 500MA IP20	HUB.500.001.CA 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 CASAMBI CON DRIVER 60W IP20 HUB 500MA IP66 CASAMBI WITH DRIVER 60W IP20
E.TRA.635.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE DALI2 60W 500MA IP20 DRIVER DALI2 60W 500MA IP20		

ACCESSORI

ACCESSORIES

BOX DA INCASSO

RECESSED BOXES


A.BOX.019.01

Cassaforma interrata in policarbonato per Rim/Cut 70
Inground polycarbonate formwork for Rim/Cut 70
 H 110 x Ø 135


D.BOX.033.01

Cassaforma corta in alluminio per Rim/Cut 70
Short aluminum formwork for Rim/Cut 70
 H 100 x Ø 60

CONNETTORI

CONNECTORS


MOR682P/2V

Connettore IP68 2Poli/2Vie 2 x 1 mm²
Connector IP68 2Poles/2Ways 2 x 1 mm²
 L 72 x Ø 22

ALIMENTATORI 24Vdc

DRIVER 24Vdc


E.TRA.577

1 Driver for 1-3 Lamps

Alimentatore ON/OFF 25W 24Vdc IP67
Driver ON/OFF 25W 24Vdc IP67
 L 148 x W 40 x H 32


E.TRA.579

1 Driver for 4-12 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
 L 140 x W 63 x H 32


E.TRA.631


1 Driver for 1-2 Lamps

Alimentatore ON/OFF 15W 24Vdc IP20
Driver ON/OFF 15W 24Vdc IP20
 L 106 x W 33 x H 22


E.TRA.632

1 Driver for 1-8 Lamps

Alimentatore ON/OFF 70W 24Vdc IP20
Driver ON/OFF 70W 24Vdc IP20
 L 124 x W 80 x H 22

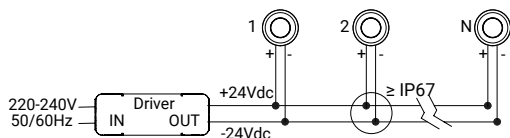

Collegamento in Parallelo
 Parallel Wiring


HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA 24Vdc

HUB - READY TO CONNECT SYSTEM 24Vdc


HUB.24V.001.ND


1 Hub for 1-8 Lamps

Hub 70W 24Vdc IP66 ON/OFF
Hub 70W 24Vdc IP66 ON/OFF
 L 235 x W 200 x H 92



ALIMENTATORI CC – 500mA

DRIVER CC – 500mA



Collegamento in Serie
Series Wiring



E.TRA.621.500
1 Driver for 1-3 Lamps

Alimentatore ON/OFF 20W 500mA IP20
Driver ON/OFF 20W 500mA IP20
L 111 x W 52 x H 22



E.TRA.623.500
1 Driver for 1-4 Lamps

Alimentatore ON/OFF 36W 500mA IP20
Driver ON/OFF 36W 500mA IP20
L 163 x W 30 x H 21



E.TRA.634.500
1 Driver for 1-5 Lamps

Alimentatore ON/OFF 60W 500mA IP20
Driver ON/OFF 60W 500mA IP20
L 124 x W 80 x H 22



E.TRA.635.500
1 Driver for 1-5 Lamps

Alimentatore DALI2 60W 500mA IP20
Driver DALI2 60W 500mA IP20
L 124 x W 80 x H 22



E.TRA.636.500
1 Driver for 1-5 Lamps

Alimentatore CASAMBI 60W 500mA IP20
Driver CASAMBI 60W 500mA IP20
L 124 x W 80 x H 22



E.TRA.658.500
1 Driver for 1-3 Lamps

Alimentatore ON/OFF 23W 500mA IP67
Driver ON/OFF 23W 500mA IP67
L 124 x W 47 x H 26



E.TRA.659.500
1 Driver for 1-3 Lamps

Alimentatore DALI2 23W 500mA IP67
Driver DALI2 23W 500mA IP67
L 124 x W 47 x H 26

HUB – SISTEMI DI CONNESSIONE SEMPLIFICATA CC 500mA

HUB – READY TO CONNECT SYSTEM CC 500mA



HUB.500.001.CA
1 Hub for 1-5 Lamps

Hub 500mA IP66 CASAMBI con driver 60W IP20
Hub 500mA IP66 CASAMBI with driver 60W IP20
L 235 x W 200 x H 92




HUB.500.001.DA2
1 Hub for 1-5 Lamps

Hub 500mA IP66 DALI-2 con driver 60W IP20
Hub 500mA IP66 DALI-2 with driver 60W IP20
L 235 x W 200 x H 92



HUB.500.001.ND
1 Hub for 1-5 Lamps

Hub 500mA IP66 ON/OFF con driver 60W IP20
Hub 500mA IP66 ON/OFF with driver 60W IP20
L 235 x W 200 x H 92

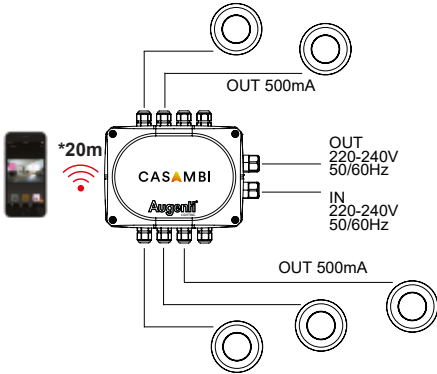





PLAIN

Apparecchi da incasso per illuminazione architettonica
Architectural recessed lights

DESCRIZIONE *DESCRIZIONE*

Abbiamo progettato Plain partendo da dei punti chiave imprescindibili: installazione rapida e sicura, elevata dissipazione, protezione anti-condensa, manutenzione semplice e veloce. Gli accorgimenti tecnici del prodotto permettono l'installazione e l'utilizzo di Plain in molteplici progetti ed in totale sicurezza, garantendone praticità, adattabilità e durata nel tempo grazie alla struttura ed ai materiali utilizzati. Inoltre, la miscelazione e la pulizia dei fasci luminosi, ottenuti attraverso un'accurata scelta delle ottiche, conferiscono a Plain gli elementi definitivi per renderlo un prodotto largamente collocabile ed altamente performante. Disponibile anche la versione con ottica orientabile e RGBW.

We designed Plain starting from some essential key points: fast and safe installation, high dissipation, anti-condensation protection, simple and quick maintenance. The technical features of the product allow the installation and use of Plain in multiple projects and in total safety, guaranteeing practicality, adaptability and durability thanks to the structure and materials used. In addition, the mixing and cleaning of the light beams, obtained through a careful choice of optics, give Plain the final elements to make it a widely applicable product and high performance. Also available with adjustable optics and RGBW version.

INSTALLAZIONE *INSTALLATION*

Incasso a terra

Ground recessed

CORPO *BODY*

Corpo illuminante: Alluminio pressofuso
Carter per elettronica: Poliammide

*Lighting body: Die-cast aluminum
Electronics housing: Polyamide*

BOX *BOX*

Polipropilene (PP) 30% fibra stabilizzata UV
GWT750

*Polypropylene (PP) 30% fiber UV stabilized
GWT750*

SCHERMO *SCREEN*

Vetro extrachiaro temprato 15 mm

Extra clear tempered glass 15 mm

GUARNIZIONI *SEALS*

EPDM

EPDM

CORNICE *FRAME*

Acciaio sabbiato AISI316L

Sandblasted steel AISI316L

VITERIA *SCREWS*

Acciaio inox A2

Stainless steel A2








**CONFIG.
CODICE**
CODE
CONFIG.

▲ → **H=2700K
W=3000K
N=4000K**

ALIMENTAZIONE
INPUT SUPPLY

220-240VAC 50/60HZ
220-240VAC 50/60HZ

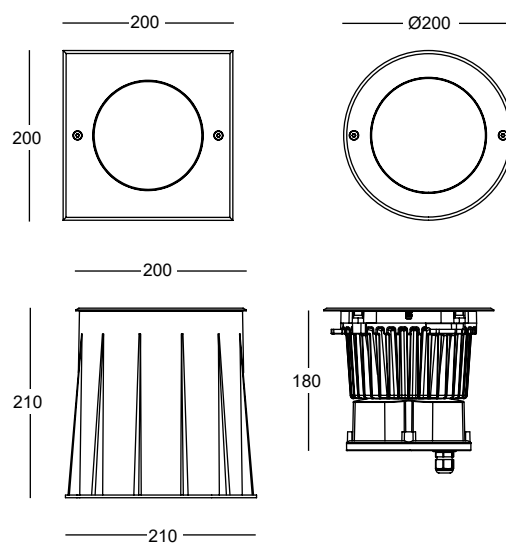

IP 67

IK 10




PLAIN

INCASSO Ø200

DRIVER INCORPORATO

RECESSED Ø200

BUILT-IN DRIVER

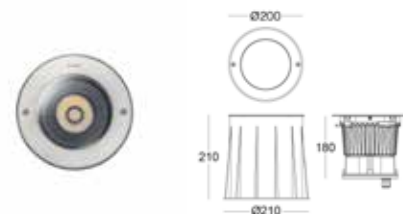

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3200R/▲C50NB99	STRETTO/15° NARROW/15°	20W	2700 lm	1900 lm	220-240Vac 50/60Hz	II	67	10	>80
3200R/▲C50MB99	MEDIO/25° MEDIUM/25°	20W	2700 lm	1940 lm	220-240Vac 50/60Hz	II	67	10	>80
3200R/▲C50WB99	LARGO/36° WIDE/36°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	II	67	10	>80
3200R/▲C50SW99	MOLTO LARGO/60° SUPER WIDE/60°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

ON/OFF


CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO ASIMMETRICO Ø200

DRIVER INCORPORATO

RECESSED ASYMMETRIC Ø200

BUILT-IN DRIVER

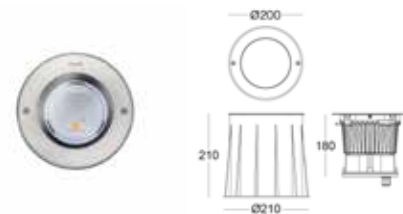

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3200R/▲C50AB99	ASIMMETRICO ASYMMETRIC	20W	2700 lm	1850 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

ON/OFF


CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO VETRO OPALE Ø200

DRIVER INCORPORATO

RECESSED OPAL GLASS Ø200

BUILT-IN DRIVER

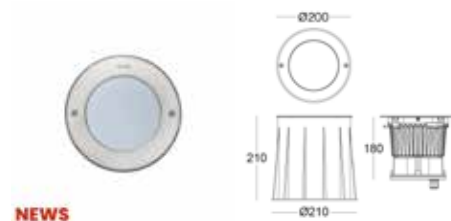

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3200R/▲C35VO99	DIFFUSO/110° DIFFUSED/110°	12W	1500 lm	370 lm	220-240Vac 50/60Hz	II	67	10	>80

VO = VETRO EXTRACHIARO OPALE TEMPRATO 15 MM - VO = EXTRA CLEAR OPAL TEMPERED GLASS 15 MM

ON/OFF

CARRABILE 2000 KG - DRIVEWAY 2000 KG

ACCESSORI

ACCESSORIES

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.581	LIMITATORE DI SOVRATENSIONE CL II - IP67 SURGE PROTECTOR CL II - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

INCASSO DALI Ø200
DRIVER INCORPORATO
RECESSED DALI Ø200
BUILT-IN DRIVER



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3200R/▲D50NB99	 STRETTO/15° NARROW/15°	20W	2700 lm	1900 lm	220-240Vac 50/60Hz	II	67	10	>80
3200R/▲D50MB99	 MEDIO/25° MEDIUM/25°	20W	2700 lm	1940 lm	220-240Vac 50/60Hz	II	67	10	>80
3200R/▲D50WB99	 LARGO/36° WIDE/36°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	II	67	10	>80
3200R/▲D50SW99	 MOLTO LARGO/60° SUPER WIDE/60°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO DALI ASIMMETRICO Ø200
DRIVER INCORPORATO
RECESSED DALI ASYMMETRIC Ø200
BUILT-IN DRIVER




CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3200R/▲D50AB99	 ASIMMETRICO ASYMMETRIC	20W	2700 lm	1850 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO DALI VETRO OPALE Ø200
DRIVER INCORPORATO
RECESSED DALI OPAL GLAS Ø200
BUILT-IN DRIVER

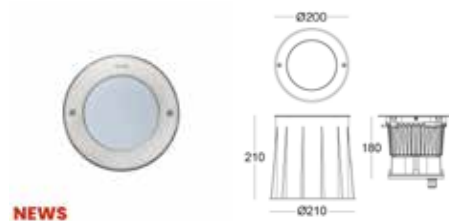

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3200R/▲D35VO99	 DIFFUSO/110° DIFFUSED/110°	12W	1500 lm	370 lm	220-240Vac 50/60Hz	II	67	10	>80

VO = VETRO EXTRACHIARO OPALE TEMPRATO 15 MM - VO = EXTRA CLEAR OPAL TEMPERED GLASS 15 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CARRABILE 2000 KG - DRIVEWAY 2000 KG

ACCESSORI
ACCESSORIES

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.TRA.581	LIMITATORE DI SOVRATENSIONE CL II - IP67 SURGE PROTECTOR CL II - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

INCASSO TRIAC Ø200
DRIVER INCORPORATO
RECESSED TRIAC Ø200
BUILT-IN DRIVER



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3200R/▲T50NB99	 STRETTO/15° NARROW/15°	20W	2700 lm	1900 lm	220-240Vac 50/60Hz	II	67	10	>80
3200R/▲T50MB99	 MEDIO/25° MEDIUM/25°	20W	2700 lm	1940 lm	220-240Vac 50/60Hz	II	67	10	>80
3200R/▲T50WB99	 LARGO/36° WIDE/36°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	II	67	10	>80
3200R/▲T50SW99	 MOLTO LARGO/60° SUPER WIDE/60°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO TRIAC ASIMMETRICO Ø200
DRIVER INCORPORATO
RECESSED TRIAC ASYMMETRIC Ø200
BUILT-IN DRIVER




CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3200R/▲T50AB99	 ASIMMETRICO ASYMMETRIC	20W	2700 lm	1850 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO TRIAC VETRO OPALE Ø200
DRIVER INCORPORATO
RECESSED TRIAC OPAL GLAS Ø200
BUILT-IN DRIVER

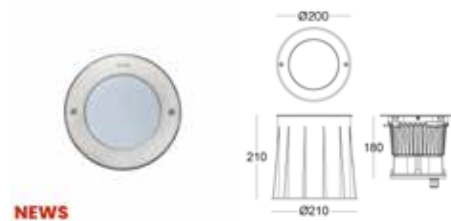

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3200R/▲T35VO99	 DIFFUSO/110° DIFFUSED/110°	12W	1500 lm	370 lm	220-240Vac 50/60Hz	II	67	10	>80

VO = VETRO EXTRACHIARO OPALE TEMPRATO 15 MM - VO = EXTRA CLEAR OPAL TEMPERED GLASS 15 MM

DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

CARRABILE 2000 KG - DRIVEWAY 2000 KG

ACCESSORI
ACCESSORIES


MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.581	LIMITATORE DI SOVRATENSIONE CL II - IP67 SURGE PROTECTOR CL II - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	KIT.034	KIT CASAMBI IP68 220V TRIAC KIT CASAMBI IP68 220V TRIAC

INCASSO L. 200

DRIVER INCORPORATO

RECESSED L. 200

BUILT-IN DRIVER

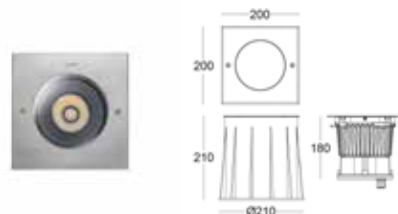

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3210R/▲C50NB99	 STRETTO/15° NARROW/15°	20W	2700 lm	1900 lm	220-240Vac 50/60Hz	II	67	10	>80
3210R/▲C50MB99	 MEDIO/25° MEDIUM/25°	20W	2700 lm	1940 lm	220-240Vac 50/60Hz	II	67	10	>80
3210R/▲C50WB99	 LARGO/36° WIDE/36°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	II	67	10	>80
3210R/▲C50SW99	 MOLTO LARGO/60° SUPER WIDE/60°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

ON/OFF


CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO ASIMMETRICO L. 200

DRIVER INCORPORATO

RECESSED ASYMMETRIC L. 200

BUILT-IN DRIVER

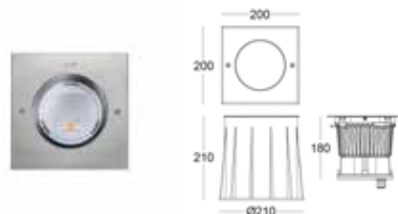

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3210R/▲C50AB99	 ASIMMETRICO ASYMMETRIC	20W	2700 lm	1850 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

ON/OFF


CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO VETRO OPALE L. 200

DRIVER INCORPORATO

RECESSED OPAL GLASS L. 200

BUILT-IN DRIVER

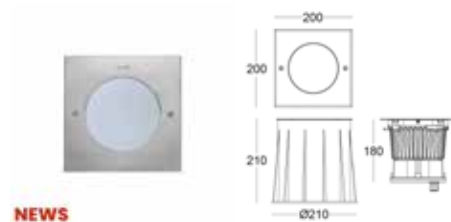

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3210R/▲C35VO99	 DIFFUSO/110° DIFFUSED/110°	12W	1500 lm	370 lm	220-240Vac 50/60Hz	II	67	10	>80

VO = VETRO EXTRACHIARO OPALE TEMPRATO 15 MM - VO = EXTRA CLEAR OPAL TEMPERED GLASS 15 MM

ON/OFF


CARRABILE 2000 KG - DRIVEWAY 2000 KG

ACCESSORI

ACCESSORIES

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.581	LIMITATORE DI SOVRATENSIONE CL II - IP67 SURGE PROTECTOR CL II - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

INCASSO DALI L. 200
DRIVER INCORPORATO
RECESSED DALI L. 200
BUILT-IN DRIVER

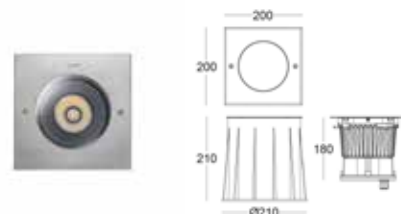


CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3210R/▲D50NB99	STRETTO/15° NARROW/15°	20W	2700 lm	1940 lm	220-240Vac 50/60Hz	II	67	10	>80
3210R/▲D50MB99	MEDIO/25° MEDIUM/25°	20W	2700 lm	1900 lm	220-240Vac 50/60Hz	II	67	10	>80
3210R/▲D50WB99	LARGO/36° WIDE/36°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	II	67	10	>80
3210R/▲D50SW99	MOLTO LARGO/60° SUPER WIDE/60°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO DALI ASIMMETRICO L. 200
DRIVER INCORPORATO
RECESSED DALI ASYMMETRIC L. 200
BUILT-IN DRIVER

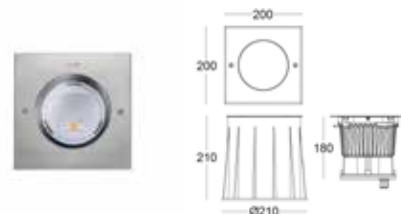


CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3210R/▲D50AB99	ASIMMETRICO ASYMMETRIC	20W	2700 lm	1850 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO DALI VETRO OPALE L. 200
DRIVER INCORPORATO
RECESSED DALI OPAL GLAS L. 200
BUILT-IN DRIVER

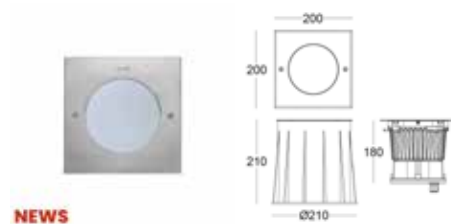

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3210R/▲D35VO99	DIFFUSO/110° DIFFUSED/110°	12W	1500 lm	370 lm	220-240Vac 50/60Hz	II	67	10	>80

VO = VETRO EXTRACHIARO OPALE TEMPRATO 15 MM - VO = EXTRA CLEAR OPAL TEMPERED GLASS 15 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CARRABILE 2000 KG - DRIVEWAY 2000 KG


ACCESSORI
ACCESSORIES

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.TRA.581	LIMITATORE DI SOVRATENSIONE CL II - IP67 SURGE PROTECTOR CL II - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

INCASSO TRIAC L. 200

DRIVER INCORPORATO

RECESSED TRIAC L. 200
BUILT-IN DRIVER

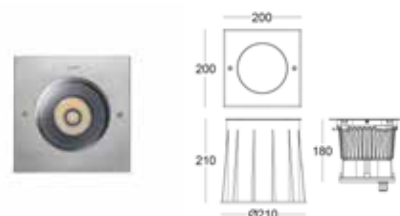

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3210R/▲T50NB99	 STRETTO/15° NARROW/15°	20W	2700 lm	1940 lm	220-240Vac 50/60Hz	II	67	10	>80
3210R/▲T50MB99	 MEDIO/25° MEDIUM/25°	20W	2700 lm	1900 lm	220-240Vac 50/60Hz	II	67	10	>80
3210R/▲T50WB99	 LARGO/36° WIDE/36°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	II	67	10	>80
3210R/▲T50SW99	 MOLTO LARGO/60° SUPER WIDE/60°	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM


DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO TRIAC ASIMMETRICO L. 200

DRIVER INCORPORATO

RECESSED TRIAC ASYMMETRIC L. 200
BUILT-IN DRIVER

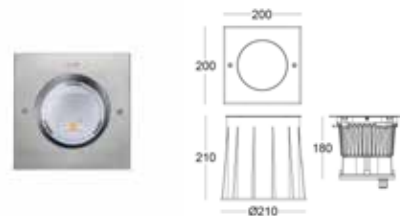

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3210R/▲T50AB99	 ASIMMETRICO ASYMMETRIC	20W	2700 lm	1850 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM


DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO TRIAC VETRO OPALE L. 200

DRIVER INCORPORATO

RECESSED TRIAC OPAL GLAS L. 200
BUILT-IN DRIVER

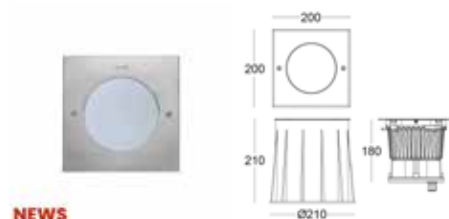

NEWS

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3210R/▲T35VO99	 DIFFUSO/110° DIFFUSED/110°	12W	1500 lm	370 lm	220-240Vac 50/60Hz	II	67	10	>80

VO = VETRO EXTRACHIARO OPALE TEMPRATO 15 MM - VO = EXTRA CLEAR OPAL TEMPERED GLASS 15 MM

DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

CARRABILE 2000 KG - DRIVEWAY 2000 KG

ACCESSORI

ACCESSORIES

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.581	LIMITATORE DI SOVRATENSIONE SURGE PROTECTOR	CL II - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	KIT.034	KIT CASAMBI IP68 220V TRIAC KIT CASAMBI IP68 220V TRIAC	

PLAIN ADJUSTABLE

INCASSO ORIENTABILE Ø200

DRIVER INCORPORATO

ADJUSTABLE RECESSED Ø200

BUILT-IN DRIVER



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3201R/▲C45NB99	 ORIENTABILE STRETTO/16° ADJUSTABLE NARROW/16°	18W	2400 lm	1800 lm	220-240Vac 50/60Hz	II	67	10	>80
3201R/▲C45MB99	 ORIENTABILE MEDIO/33° ADJUSTABLE MEDIUM/33°	18W	2400 lm	1800 lm	220-240Vac 50/60Hz	II	67	10	>80
3201R/▲C45WB99	 ORIENTABILE LARGO/54° ADJUSTABLE WIDE/54°	18W	2400 lm	1700 lm	220-240Vac 50/60Hz	II	67	10	>80
3201R/▲C45OB99	 ORIENTABILE OVALE/25°X60° ADJUSTABLE OVAL/25°X60°	18W	2400 lm	1700 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

ON/OFF


CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO ORIENTABILE L. 200

DRIVER INCORPORATO

ADJUSTABLE RECESSED L. 200

BUILT-IN DRIVER

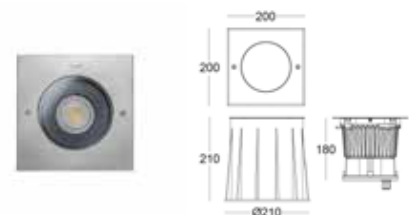

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3211R/▲C45NB99	 ORIENTABILE STRETTO/16° ADJUSTABLE NARROW/16°	18W	2400 lm	1800 lm	220-240Vac 50/60Hz	II	67	10	>80
3211R/▲C45MB99	 ORIENTABILE MEDIO/33° ADJUSTABLE MEDIUM/33°	18W	2400 lm	1800 lm	220-240Vac 50/60Hz	II	67	10	>80
3211R/▲C45WB99	 ORIENTABILE LARGO/54° ADJUSTABLE WIDE/54°	18W	2400 lm	1700 lm	220-240Vac 50/60Hz	II	67	10	>80
3211R/▲C45OB99	 ORIENTABILE OVALE/25°X60° ADJUSTABLE OVAL/25°X60°	18W	2400 lm	1700 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

ON/OFF

CARRABILE 2000 KG - DRIVEWAY 2000 KG

ACCESSORI

ACCESSORIES

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.581	LIMITATORE DI SOVRATENSIONE CL II - IP67 SURGE PROTECTOR CL II - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

INCASSO ORIENTABILE DALI Ø200
DRIVER INCORPORATO
ADJUSTABLE RECESSED DALI Ø200
BUILT-IN DRIVER




CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3201R/▲D45NB99	 ORIENTABILE STRETTO/16° ADJUSTABLE NARROW/16°	18W	2400 lm	1800 lm	220-240Vac 50/60Hz	II	67	10	>80
3201R/▲D45MB99	 ORIENTABILE MEDIO/33° ADJUSTABLE MEDIUM/33°	18W	2400 lm	1800 lm	220-240Vac 50/60Hz	II	67	10	>80
3201R/▲D45WB99	 ORIENTABILE LARGO/54° ADJUSTABLE WIDE/54°	18W	2400 lm	1700 lm	220-240Vac 50/60Hz	II	67	10	>80
3201R/▲D45OB99	 ORIENTABILE OVALE/25°X60° ADJUSTABLE OVAL/25°X60°	18W	2400 lm	1700 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO ORIENTABILE DALI L. 200
DRIVER INCORPORATO
ADJUSTABLE RECESSED DALI L. 200
BUILT-IN DRIVER

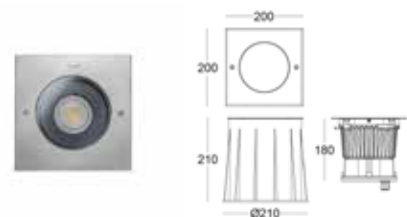

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3211R/▲D45NB99	 ORIENTABILE STRETTO/16° ADJUSTABLE NARROW/16°	18W	2400 lm	1800 lm	220-240Vac 50/60Hz	II	67	10	>80
3211R/▲D45MB99	 ORIENTABILE MEDIO/33° ADJUSTABLE MEDIUM/33°	18W	2400 lm	1800 lm	220-240Vac 50/60Hz	II	67	10	>80
3211R/▲D45WB99	 ORIENTABILE LARGO/54° ADJUSTABLE WIDE/54°	18W	2400 lm	1700 lm	220-240Vac 50/60Hz	II	67	10	>80
3211R/▲D45OB99	 ORIENTABILE OVALE/25°X60° ADJUSTABLE OVAL/25°X60°	18W	2400 lm	1700 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CARRABILE 2000 KG - DRIVEWAY 2000 KG

ACCESSORI
ACCESSORIES

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.TRA.581	LIMITATORE DI SOVRATENSIONE CL II - IP67 SURGE PROTECTOR CL II - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

INCASSO ORIENTABILE TRIAC Ø200
DRIVER INCORPORATO
ADJUSTABLE RECESSED TRIAC Ø200
BUILT-IN DRIVER




CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3201R/▲T45NB99	 ORIENTABILE STRETTO/16° ADJUSTABLE NARROW/16°	18W	2400 lm	1800 lm	220-240Vac 50/60Hz	II	67	10	>80
3201R/▲T45MB99	 ORIENTABILE MEDIO/33° ADJUSTABLE MEDIUM/33°	18W	2400 lm	1800 lm	220-240Vac 50/60Hz	II	67	10	>80
3201R/▲T45WB99	 ORIENTABILE LARGO/54° ADJUSTABLE WIDE/54°	18W	2400 lm	1700 lm	220-240Vac 50/60Hz	II	67	10	>80
3201R/▲T45OB99	 ORIENTABILE OVALE/25°X60° ADJUSTABLE OVAL/25°X60°	18W	2400 lm	1700 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO ORIENTABILE TRIAC L. 200
DRIVER INCORPORATO
ADJUSTABLE RECESSED TRIAC L. 200
BUILT-IN DRIVER

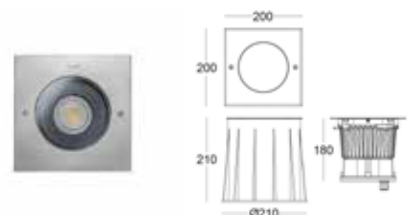

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3211R/▲T45NB99	 ORIENTABILE STRETTO/16° ADJUSTABLE NARROW/16°	18W	2400 lm	1800 lm	220-240Vac 50/60Hz	II	67	10	>80
3211R/▲T45MB99	 ORIENTABILE MEDIO/33° ADJUSTABLE MEDIUM/33°	18W	2400 lm	1800 lm	220-240Vac 50/60Hz	II	67	10	>80
3211R/▲T45WB99	 ORIENTABILE LARGO/54° ADJUSTABLE WIDE/54°	18W	2400 lm	1700 lm	220-240Vac 50/60Hz	II	67	10	>80
3211R/▲T45OB99	 ORIENTABILE OVALE/25°X60° ADJUSTABLE OVAL/25°X60°	18W	2400 lm	1700 lm	220-240Vac 50/60Hz	II	67	10	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

CARRABILE 2000 KG - DRIVEWAY 2000 KG

ACCESSORI
ACCESSORIES

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.581	LIMITATORE DI SOVRATENSIONE CL II - IP67 SURGE PROTECTOR CL II - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	KIT.034	KIT CASAMBI IP68 220V TRIAC KIT CASAMBI IP68 220V TRIAC




PLAIN RGBW

INCASSO RGBW Ø200

RECESSED RGBW Ø200

RGBW



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3200R/RCRCNB99	 STRETTO/15° NARROW/15°	12W with Algorithm	1650 lm	1420 lm	24 Vdc	III	67	10	
3200R/RCRCMB99	 MEDIO/24° MEDIUM/24°	12W with Algorithm	1650 lm	1420 lm	24 Vdc	III	67	10	
3200R/RCRCWB99	 LARGO/35° WIDE/35°	12W with Algorithm	1650 lm	1420 lm	24 Vdc	III	67	10	
3200R/RCRCW99	 MOLTO LARGO/60° SUPER WIDE/60°	12W with Algorithm	1650 lm	1420 lm	24 Vdc	III	67	10	

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM


DIMMERABILE - DIMMABLE

CARRABILE 2000 KG - DRIVEWAY 2000 KG

INCASSO RGBW L. 200

RECESSED RGBW L. 200

RGBW



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3210R/RCRCNB99	 STRETTO/15° NARROW/15°	12W with Algorithm	1650 lm	1420 lm	24 Vdc	III	67	10	
3210R/RCRCMB99	 MEDIO/24° MEDIUM/24°	12W with Algorithm	1650 lm	1420 lm	24 Vdc	III	67	10	
3210R/RCRCWB99	 LARGO/35° WIDE/35°	12W with Algorithm	1650 lm	1420 lm	24 Vdc	III	67	10	
3210R/RCRCW99	 MOLTO LARGO/60° SUPER WIDE/60°	12W with Algorithm	1650 lm	1420 lm	24 Vdc	III	67	10	

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 15 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 15 MM

DIMMERABILE - DIMMABLE

CARRABILE 2000 KG - DRIVEWAY 2000 KG

ACCESSORI

ACCESSORIES

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.CNT.001	TASTIERA RGBW 16DMX CH.12-24VDC RGBW CONTROLLER 16DMX CH.12-24VDC
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	E.CNT.002	TASTIERA RGBW 1024DMX CH. 5-15VDC RGBW CONTROLLER 1024DMX CH. 5-15VDC
E.TRA.579 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67	E.TRA.594	SPLITTER DMX-RDM 2 CANALI SPLITTER DMX-RDM 2 CHANNELS
E.TRA.592 1 DRIVER FOR 5-9 LAMPS	ALIMENTATORE ON/OFF ELG 240W 24VDC IP67 DRIVER ON/OFF ELG 240W 24VDC IP67		

ACCESSORI

ACCESSORIES

CONNETTORI

CONNECTORS



MOR685P/2V

Connettore IP68 5Poli/2Vie 5 x 2.5 mm²
Connector IP68 5Poles/2Ways 5 x 2.5 mm²
L 109 x Ø 31



MOR685P/3V

Connettore a Y IP68 5Poli/3Vie 5 x 2.5 mm²
Connector Y IP68 5Poles/3Ways 5 x 2.5 mm²
L 140 x W 72 x H 33

ALIMENTATORI 24Vdc

DRIVER 24Vdc



E.TRA.579

1 Driver for 1-4 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
L 140 x W 63 x H 32



E.TRA.592

1 Driver for 5-9 Lamps

Alimentatore ON/OFF ELG 240W 24Vdc IP67
Driver ON/OFF ELG 240W 24Vdc IP67
L 244 x W 71 x H 38

CENTRALINE RGBW

RGBW CONTROL UNITS



E.TRA.594

Splitter DMX-RDM 2 Canali
Splitter DMX-RDM 2 Channels
L 88 x W 54 x H 26

CONTROLLER TOUCH

TOUCH CONTROLLER




E.CNT.001

Tastiera RGBW 16DMX Ch.12-24Vdc
RGBW Controller 16DMX Ch.12-24Vdc
L 75 x W 29.5 x H 120




E.CNT.002

Tastiera RGBW 1024DMX Ch.5-15Vdc
RGBW Controller 1024DMX Ch.5-15Vdc
L 146 x W 10 x H 106

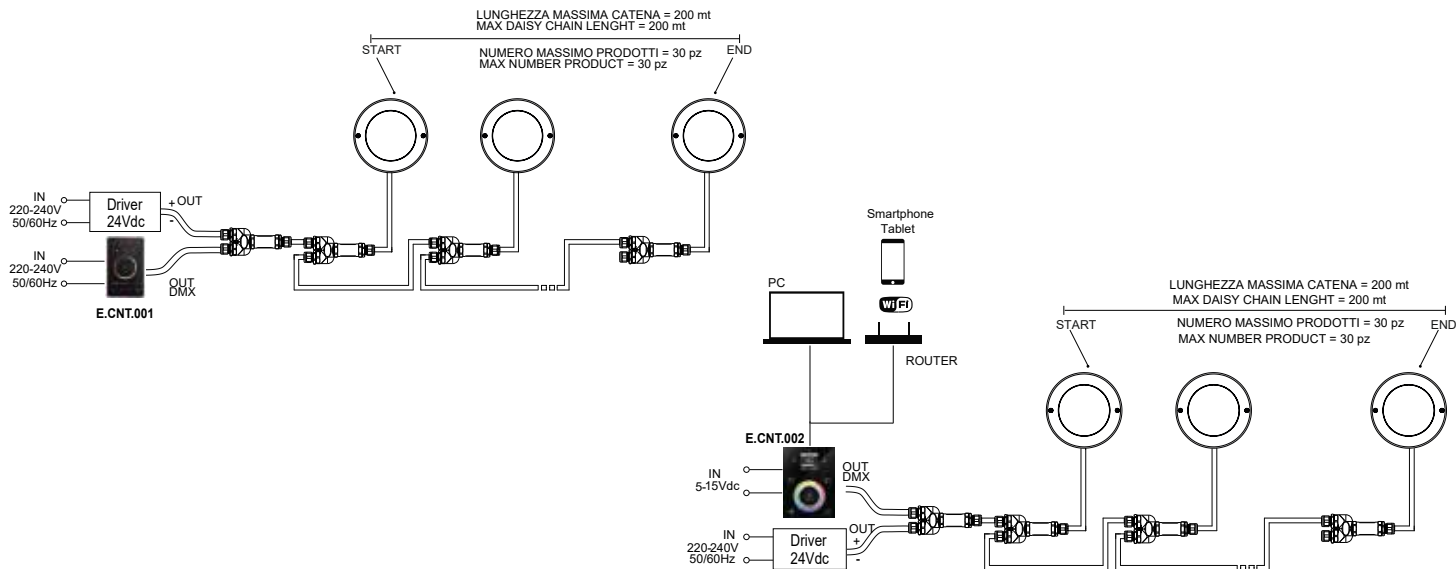





MATRIX MINI

Apparecchi da incasso per illuminazione lineare
Linear recessed lights

DESCRIZIONE DESCRIZIONE

Apparecchio da incasso a pavimento lineare. Le diverse lunghezze e le molteplici ottiche consentono una vasta gamma di possibilità di progettazione. Questa versione di Matrix è particolarmente adatta all'illuminazione radente su facciate di edifici, per risaltarne la consistenza materica, o per accentuare i dettagli architettonici di un edificio.

Recessed linear floor luminaire. The different lengths and multiple optics allow a wide range of design possibilities. This version of Matrix is particularly suitable for shimmering lighting on building facades, to highlight the textural consistency, or to accentuate architectural details of a building.

INSTALLAZIONE INSTALLATION

Incasso a terra

Ground recessed

CORPO BODY

Alluminio estruso

Extruded aluminum

BOX BOX

Lamiera di acciaio inox AISI430F

Stainless steel sheet AISI430F

SCHERMO SCREEN

Vetro extrachiaro temprato 4 mm

Extra clear tempered glass 4 mm

VITERIA SCREWS

Acciaio inox A2

Stainless steel A2

VERNICIATURA FINISHING

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder









CONFIG.
CODICE
CODE
CONFIG.

▲ → **H=2700K**
W=3000K
N=4000K

VERSIONE IN
TENSIONE
CONSTANT
VOLTAGE

8W-16W CON DRIVER REMOTO 24Vdc
8W-16W REMOTE DRIVER 24Vdc



IP 67

IK 08

CE

HUB
SYSTEM


INCASSO LINEARE CON LENTI L. 530**24VDC***LINEAR RECESSED WITH LENS L. 530***24VDC**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2811R/▲PRCNB	STRETTO/20° NARROW/20°	8W	900 lm	785 lm	24Vdc	III	67	08	>80
2811R/▲PRCWB	LARGO/45° WIDE/45°	8W	900 lm	785 lm	24Vdc	III	67	08	>80
2811R/▲PRCOB	OVALE/20°X40° OVAL/20°X40°	8W	900 lm	785 lm	24Vdc	III	67	08	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 4 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 4 MM

DIMMERABILE - DIMMABLE

CALPESTATBILE 500 KG - WALKABLE 500KG

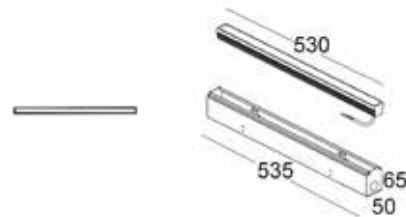INCASSO LINEARE EMISSIONE DIFFUSA L. 530**24VDC***LINEAR RECESSED DIFFUSE EMISSION L. 530***24VDC**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2811R/▲RRCVS	DIFFUSO DIFFUSED	8W	1130 lm	280 lm	24Vdc	III	67	08	>80

VETRO EXTRACHIARO OPALE TEMPRATO 4 MM - EXTRA CLEAR OPAL TEMPERED GLASS 4 MM

DIMMERABILE - DIMMABLE

CALPESTATBILE 500 KG - WALKABLE 500KG

ACCESSORI*ACCESSORIES*

MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.579 1 DRIVER FOR 3-10 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1 LAMP	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF
E.TRA.632 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20	HUB.24V.001.DA2 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 DALI-2 HUB 70W 24VDC IP66 DALI-2
E.TRA.633 1 DRIVER FOR 1-10 LAMPS	ALIMENTATORE DALI 100W 24VDC IP67 DRIVER DALI 100W 24VDC IP67	HUB.24V.001.CA 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 CASAMBI HUB 70W 24VDC IP66 CASAMBI
E.TRA.577 1 DRIVER FOR 1-2 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67		

INCASSO LINEARE CON LENTI L. 780
24VDC
LINEAR RECESSED WITH LENS L. 780
24VDC




CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2812R/▲PRCNB	 STRETTO/20° NARROW/20°	12W	1350 lm	1180 lm	24Vdc	III	67	08	>80
2812R/▲PRCWB	 LARGO/45° WIDE/45°	12W	1350 lm	1180 lm	24Vdc	III	67	08	>80
2812R/▲PRCOB	 OVALE/20°X40° OVAL/20°X40°	12W	1350 lm	1180 lm	24Vdc	III	67	08	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 4 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 4 MM

DIMMERABILE - DIMMABLE

CALPESTATBILE 500 KG - WALKABLE 500KG

INCASSO LINEARE EMISSIONE DIFFUSA L. 780
24VDC
LINEAR RECESSED DIFFUSE EMISSION L. 780
24VDC

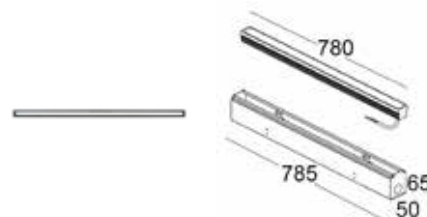

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2812R/▲RRCVS	 DIFFUSO DIFFUSED	12W	1700 lm	420 lm	24Vdc	III	67	08	>80

VETRO EXTRACHIARO OPALE TEMPRATO 4 MM - EXTRA CLEAR OPAL TEMPERED GLASS 4 MM

DIMMERABILE - DIMMABLE


CALPESTATBILE 500 KG - WALKABLE 500KG

ACCESSORI

ACCESSORIES

MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.579 1 DRIVER FOR 2-7 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1 LAMP	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.ND 1 HUB FOR 1-5 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF
E.TRA.632 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20	HUB.24V.001.DA2 1 HUB FOR 1-5 LAMPS	HUB 70W 24VDC IP66 DALI-2 HUB 70W 24VDC IP66 DALI-2
E.TRA.633 1 DRIVER FOR 1-7 LAMPS	ALIMENTATORE DALI 100W 24VDC IP67 DRIVER DALI 100W 24VDC IP67	HUB.24V.001.CA 1 HUB FOR 1-5 LAMPS	HUB 70W 24VDC IP66 CASAMBI HUB 70W 24VDC IP66 CASAMBI
E.TRA.577 1 DRIVER FOR 1 LAMP	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67		

INCASSO LINEARE CON LENTI L. 1030
24VDC
LINEAR RECESSED WITH LENS L. 1030
24VDC

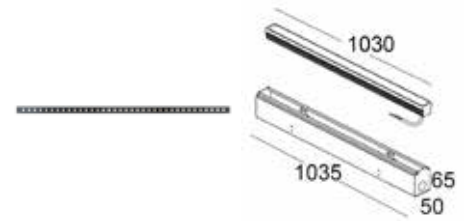


CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2813R/▲PRCNB	 STRETTO/20° NARROW/20°	16W	1800 lm	1574 lm	24Vdc	III	67	08	>80
2813R/▲PRCWB	 LARGO/45° WIDE/45°	16W	1800 lm	1574 lm	24Vdc	III	67	08	>80
2813R/▲PRCOB	 OVALE/20°X40° OVAL/20°X40°	16W	1800 lm	1574 lm	24Vdc	III	67	08	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 4 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 4 MM

DIMMERABILE - DIMMABLE

CALPESTATBILE 500 KG - WALKABLE 500KG

INCASSO LINEARE EMISSIONE DIFFUSA L. 1030
24VDC
LINEAR RECESSED DIFFUSE EMISSION L. 1030
24VDC

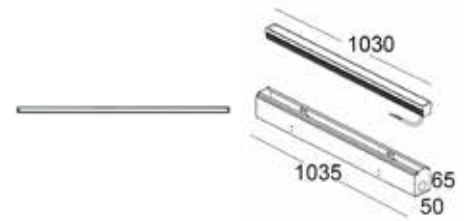

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2813R/▲RRCVS	 DIFFUSO DIFFUSED	16W	2260 lm	560 lm	24Vdc	III	67	08	>80

VETRO EXTRACHIARO OPALE TEMPRATO 4 MM - EXTRA CLEAR OPAL TEMPERED GLASS 4 MM

DIMMERABILE - DIMMABLE

CALPESTATBILE 500 KG - WALKABLE 500KG

ACCESSORI

ACCESSORIES

MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.579 1 DRIVER FOR 2-5 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1 LAMP	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.ND 1 HUB FOR 1-4 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF
E.TRA.632 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20	HUB.24V.001.DA2 1 HUB FOR 1-4 LAMPS	HUB 70W 24VDC IP66 DALI-2 HUB 70W 24VDC IP66 DALI-2
E.TRA.633 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE DALI 100W 24VDC IP67 DRIVER DALI 100W 24VDC IP67	HUB.24V.001.CA 1 HUB FOR 1-4 LAMPS	HUB 70W 24VDC IP66 CASAMBI HUB 70W 24VDC IP66 CASAMBI
E.TRA.577 1 DRIVER FOR 1 LAMP	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67		

ACCESSORI

ACCESSORIES

CONNETTORI

CONNECTORS




MOR682P/2V

Connettore IP68 2Poli/2Vie 2 x 1 mm²
Connector IP68 2Poles/2Ways 2 x 1 mm²
L 72 x Ø 22

ALIMENTATORI 24Vdc

DRIVER 24Vdc



E.TRA.577

Cod. 2811R - 1 Driver for 1-2 Lamps
Cod. 2812R - 1 Driver for 1 Lamp
Cod. 2813R - 1 Driver for 1 Lamp

Alimentatore ON/OFF 25W 24Vdc IP67
Driver ON/OFF 25W 24Vdc IP67
L 148 x W 40 x H 32



E.TRA.579

Cod. 2811R - 1 Driver for 3-10 Lamps
Cod. 2812R - 1 Driver for 2-7 Lamps
Cod. 2813R - 1 Driver for 2-5 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
L 140 x W 63 x H 32



E.TRA.631

Cod. 2811R - 1 Driver for 1 Lamp
Cod. 2812R - 1 Driver for 1 Lamp
Cod. 2813R - 1 Driver for 1 Lamp

Alimentatore ON/OFF 15W 24Vdc IP20
Driver ON/OFF 15W 24Vdc IP20
L 106 x W 33 x H 22



E.TRA.632

Cod. 2811R - 1 Driver for 1-8 Lamps
Cod. 2812R - 1 Driver for 1-5 Lamps
Cod. 2813R - 1 Driver for 1-4 Lamps

Alimentatore ON/OFF 70W 24Vdc IP20
Driver ON/OFF 70W 24Vdc IP20
L 124 x W 80 x H 22



E.TRA.633

Cod. 2811R - 1 Driver for 1-10 Lamps
Cod. 2812R - 1 Driver for 1-7 Lamps
Cod. 2813R - 1 Driver for 1-5 Lamps

Alimentatore DALI 100W 24Vdc IP67
Driver DALI 100W 24Vdc IP67
L 175 x W 63 x H 36

HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA 24Vdc

HUB - READY TO CONNECT SYSTEM 24Vdc



HUB.24V.001.ND

Cod. 2811R - 1 Driver for 1-8 Lamps
Cod. 2812R - 1 Driver for 1-5 Lamps
Cod. 2813R - 1 Driver for 1-4 Lamps

Hub 70W 24Vdc IP66 ON/OFF
Hub 70W 24Vdc IP66 ON/OFF
L 235 x W 200 x H 92



HUB.24V.001.DA2

Cod. 2811R - 1 Driver for 1-8 Lamps
Cod. 2812R - 1 Driver for 1-5 Lamps
Cod. 2813R - 1 Driver for 1-4 Lamps




Hub 70W 24Vdc IP66 DALI-2
Hub 70W 24Vdc IP66 DALI-2
L 235 x W 200 x H 92



HUB.24V.001.CA

Cod. 2811R - 1 Driver for 1-8 Lamps
Cod. 2812R - 1 Driver for 1-5 Lamps
Cod. 2813R - 1 Driver for 1-4 Lamps

Hub 70W 24Vdc IP66 CASAMBI
Hub 70W 24Vdc IP66 CASAMBI
L 235 x W 200 x H 92

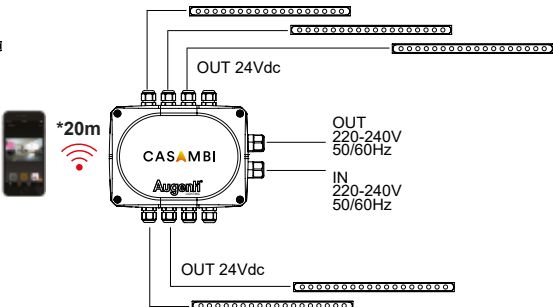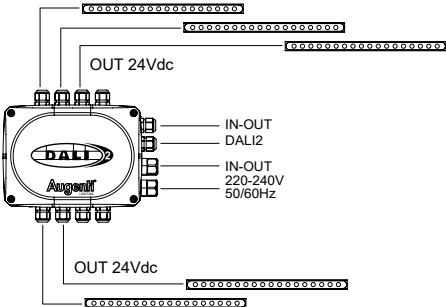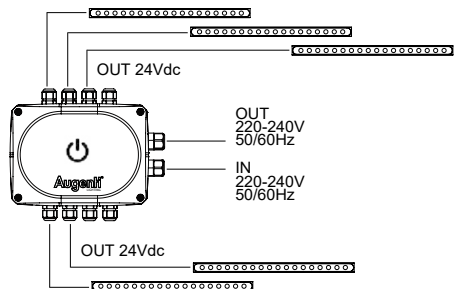





MATRIX

Apparecchi da incasso per illuminazione lineare
Linear recessed lights

DESCRIZIONE DESCRIPTION

Apparecchio da incasso a pavimento lineare. Le diverse lunghezze e le molteplici ottiche consentono una vasta gamma di possibilità di progettazione. Questa versione di Matrix è particolarmente adatta all'illuminazione radente su facciate di edifici, per risaltarne la consistenza materica, o per accentuare i dettagli architettonici di un edificio. Disponibile anche la versione RGBW.

Recessed linear floor luminaire. The different lengths and multiple optics allow a wide range of design possibilities. This version of Matrix is particularly suitable for shimmering lighting on building facades, to highlight the textural consistency, or to accentuate architectural details of a building. Also available RGBW version.

INSTALLAZIONE INSTALLATION

Incasso a terra

Ground recessed

CORPO BODY

Alluminio estruso

Extruded aluminum

BOX BOX

Lamiera di acciaio inox AISI430F

Stainless steel sheet AISI430F

SCHERMO SCREEN

Vetro extrachiario temprato 8 mm

Extra clear tempered glass 8 mm

VITERIA SCREWS

Acciaio inox A2

Stainless steel A2











**CONFIG.
CODICE**
CODE
CONFIG.

▲ → **H=2700K
W=3000K
N=4000K**

ALIMENTAZIONE
INPUT SUPPLY

220-240VAC 50/60HZ
220-240VAC 50/60HZ



IP 67


IK 09



MATRIX RECESSED

INCASSO LINEARE CON LENTI L. 340

LINEAR RECESSED WITH LENS L. 340

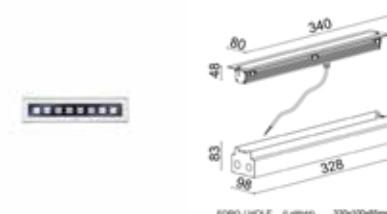

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2800R/▲P50.NB99	 STRETTO/12° NARROW/12°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	09	80
2800R/▲P50.MB99	 MEDIO/28° MEDIUM/28°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	09	80
2800R/▲P50.WB99	 LARGO/50° WIDE/50°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	09	80
2800R/▲P50.OB99	 OVALE/42°X12° OVAL/42°X12°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	09	80
2800R/▲P50.AB99	 ASIMMETRICO ASYMMETRIC	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	09	80


VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

ON/OFF

CALPESTATBILE 500 KG - WALKABLE 500KG

INCASSO LINEARE EMISSIONE DIFFUSA L. 340

LINEAR RECESSED DIFFUSE EMISSION L. 340

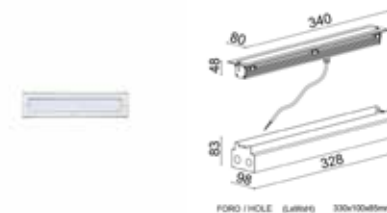

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2800R/▲R50VS.99	 DIFFUSO DIFFUSED	8W	870 lm	339 lm	220-240Vac 50/60Hz	I	67	09	80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM


ON/OFF

CALPESTATBILE 500 KG - WALKABLE 500KG

ACCESSORI

ACCESSORIES

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
------------	---	-----------	--

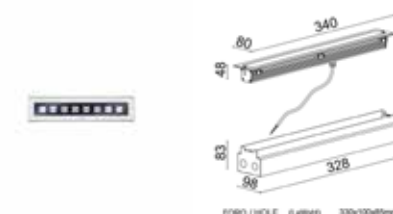
INCASSO LINEARE DALI CON LENTI L. 340**LINEAR RECESSED DALI WITH LENS L. 340**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2800R/▲D50.NB99	 STRETTO/12° NARROW/12°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	09	80
2800R/▲D50.MB99	 MEDIO/28° MEDIUM/28°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	09	80
2800R/▲D50.WB99	 LARGO/50° WIDE/50°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	09	80
2800R/▲D50.OB99	 OVALE/42°X12° OVAL/42°X12°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	09	80
2800R/▲D50.AB99	 ASIMMETRICO ASYMMETRIC	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	09	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CALPESTATBILE 500 KG - WALKABLE 500KG

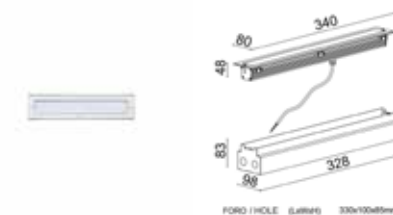INCASSO LINEARE DALI EMISSIONE DIFFUSA L. 340**LINEAR RECESSED DALI DIFFUSE EMISSION L. 340**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2800R/▲D50VS.99	 DIFFUSO DIFFUSED	8W	870 lm	339 lm	220-240Vac 50/60Hz	I	67	09	80


VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CALPESTATBILE 500 KG - WALKABLE 500KG

ACCESSORI**ACCESSORIES**

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
------------	---	-----------	--

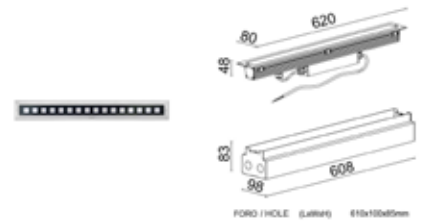
INCASSO LINEARE CON LENTI L. 620*LINEAR RECESSED WITH LENS L. 620*

CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
2801R/▲P50.NB99	 STRETTO/12° <i>NARROW/12°</i>	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	09	80
2801R/▲P50.MB99	 MEDIO/28° <i>MEDIUM/28°</i>	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	09	80
2801R/▲P50.WB99	 LARGO/50° <i>WIDE/50°</i>	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	09	80
2801R/▲P50.OB99	 OVALE/42°X12° <i>OVAL/42°X12°</i>	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	09	80
2801R/▲P50.AB99	 ASIMMETRICO <i>ASYMMETRIC</i>	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	09	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

ON/OFF

CALPESTATBILE 500 KG - WALKABLE 500KG

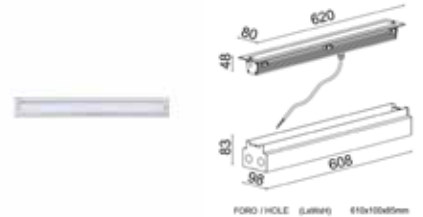INCASSO LINEARE EMISSIONE DIFFUSA L. 620*LINEAR RECESSED DIFFUSE EMISSION L. 620*

CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
2801R/▲R50VS.99	 DIFFUSO <i>DIFFUSED</i>	13W	1740 lm	678 lm	220-240Vac 50/60Hz	I	67	09	80


VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

ON/OFF

CALPESTATBILE 500 KG - WALKABLE 500KG

ACCESSORI*ACCESSORIES*

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² <i>CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²</i>	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 <i>SURGE PROTECTOR CL I - IP67</i>
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² <i>CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²</i>		

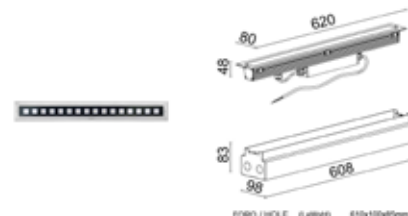
INCASSO LINEARE DALI CON LENTI L. 620**LINEAR RECESSED DALI WITH LENS L. 620**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2801R/▲D50.NB99	 STRETTO/12° NARROW/12°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	09	80
2801R/▲D50.MB99	 MEDIO/28° MEDIUM/28°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	09	80
2801R/▲D50.WB99	 LARGO/50° WIDE/50°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	09	80
2801R/▲D50.OB99	 OVALE/42°X12° OVAL/42°X12°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	09	80
2801R/▲D50.AB99	 ASIMMETRICO ASYMMETRIC	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	09	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CALPESTATBILE 500 KG - WALKABLE 500KG

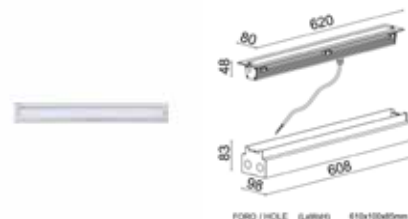INCASSO LINEARE DALI EMISSIONE DIFFUSA L. 620**LINEAR RECESSED DALI DIFFUSE EMISSION L. 620**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2801R/▲D50VS.99	 DIFFUSO DIFFUSED	13W	1740 lm	678 lm	220-240Vac 50/60Hz	I	67	09	80


VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CALPESTATBILE 500 KG - WALKABLE 500KG

ACCESSORI**ACCESSORIES**

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

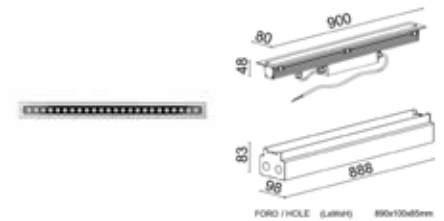
INCASSO LINEARE CON LENTI L. 900**LINEAR RECESSED WITH LENS L. 900**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2802R/▲P50.NB99	 STRETTO/12° NARROW/12°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	09	80
2802R/▲P50.MB99	 MEDIO/28° MEDIUM/28°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	09	80
2802R/▲P50.WB99	 LARGO/50° WIDE/50°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	09	80
2802R/▲P50.OB99	 OVALE/42°X12° OVAL/42°X12°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	09	80
2802R/▲P50.AB99	 ASIMMETRICO ASYMMETRIC	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	09	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

ON/OFF

CALPESTATBILE 500 KG - WALKABLE 500KG

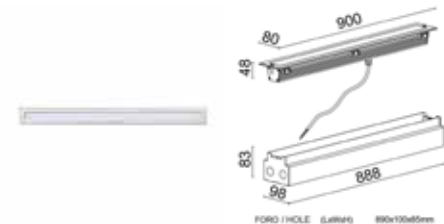INCASSO LINEARE EMISSIONE DIFFUSA L. 900**LINEAR RECESSED DIFFUSE EMISSION L. 900**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2802R/▲R50VS.99	 DIFFUSO DIFFUSED	19W	2610 lm	1020 lm	220-240Vac 50/60Hz	I	67	09	80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

ON/OFF


CALPESTATBILE 500 KG - WALKABLE 500KG

ACCESSORI**ACCESSORIES**

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

INCASSO LINEARE DALI CON LENTI L. 900

LINEAR RECESSED DALI WITH LENS L. 900

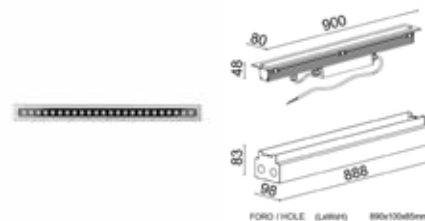

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2802R/▲D50.NB99	 STRETTO/12° NARROW/12°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	09	80
2802R/▲D50.MB99	 MEDIO/28° MEDIUM/28°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	09	80
2802R/▲D50.WB99	 LARGO/50° WIDE/50°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	09	80
2802R/▲D50.OB99	 OVALE/42°X12° OVAL/42°X12°	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	09	80
2802R/▲D50.AB99	 ASIMMETRICO ASYMMETRIC	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	09	80


VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CALPESTATBILE 500 KG - WALKABLE 500KG

INCASSO LINEARE DALI EMISSIONE DIFFUSA L. 900

LINEAR RECESSED DALI DIFFUSE EMISSION L. 900

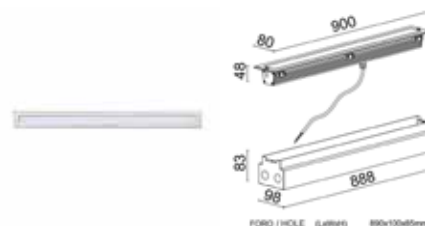

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2802R/▲D50VS.99	 DIFFUSO DIFFUSED	19W	2610 lm	1020 lm	220-240Vac 50/60Hz	I	67	09	80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM


DALI-2 INTEGRATO - DALI-2 INTEGRATED

CALPESTATBILE 500 KG - WALKABLE 500KG

ACCESSORI

ACCESSORIES

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

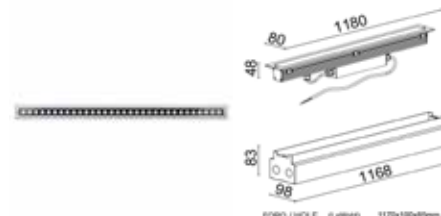
INCASSO LINEARE CON LENTI L. 1180**LINEAR RECESSED WITH LENS L. 1180**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2803R/▲P50.NB99	 STRETTO/12° NARROW/12°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	09	80
2803R/▲P50.MB99	 MEDIO/28° MEDIUM/28°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	09	80
2803R/▲P50.WB99	 LARGO/50° WIDE/50°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	09	80
2803R/▲P50.OB99	 OVALE/42°X12° OVAL/42°X12°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	09	80
2803R/▲P50.AB99	 ASIMMETRICO ASYMMETRIC	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	09	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

ON/OFF

CALPESTATBILE 500 KG - WALKABLE 500KG

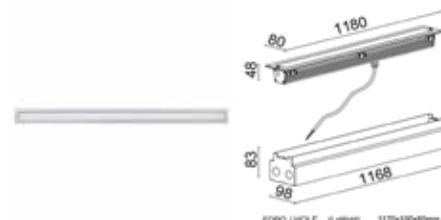INCASSO LINEARE EMISSIONE DIFFUSA L. 1180**LINEAR RECESSED DIFFUSE EMISSION L. 1180**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2803R/▲R50VS.99	 DIFFUSO DIFFUSED	26W	3480 lm	1355 lm	220-240Vac 50/60Hz	I	67	09	80


VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

ON/OFF

CALPESTATBILE 500 KG - WALKABLE 500KG

ACCESSORI**ACCESSORIES**

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

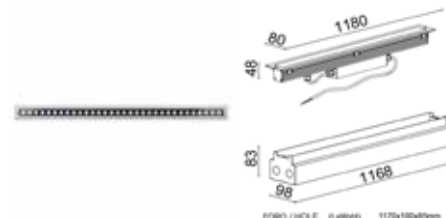
INCASSO LINEARE DALI CON LENTI L. 1180**LINEAR RECESSED DALI WITH LENS L. 1180**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2803R/▲D50.NB99	 STRETTO/12° NARROW/12°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	09	80
2803R/▲D50.MB99	 MEDIO/28° MEDIUM/28°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	09	80
2803R/▲D50.WB99	 LARGO/50° WIDE/50°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	09	80
2803R/▲D50.OB99	 OVALE/42°X12° OVAL/42°X12°	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	09	80
2803R/▲D50.AB99	 ASIMMETRICO ASYMMETRIC	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	09	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CALPESTATBILE 500 KG - WALKABLE 500KG

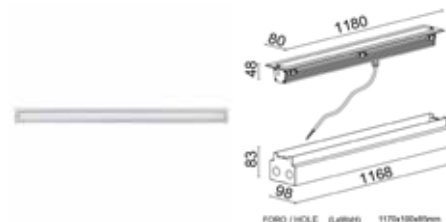INCASSO LINEARE DALI EMISSIONE DIFFUSA L. 1180**LINEAR RECESSED DALI DIFFUSE EMISSION L. 1180**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2803R/▲D50VS.99	 DIFFUSO DIFFUSED	26W	3480 lm	1355 lm	220-240Vac 50/60Hz	I	67	09	80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

CALPESTATBILE 500 KG - WALKABLE 500KG

ACCESSORI**ACCESSORIES**


MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²		

MATRIX RECESSED RGBW

INCASSO LINEARE RGBW L. 340

LINEAR RECESSED RGBW L. 340

RGBW



FORO / HOLE (L'altezza) 330x100x55mm

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2800R/RCRC.MB99	MEDIO/24° MEDIUM/24°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	67	09	RGBW
2800R/RCRC.O499	OVALE/40°X20° OVAL/40°X20°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	67	09	RGBW
2800R/RCRC.WB99	LARGO/35° WIDE/35°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	67	09	RGBW
2800R/RCRC.SW99	MOLTO LARGO/54° SUPER WIDE/54°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	67	09	RGBW

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM


DIMMERABILE - DIMMABLE

CALPESTATBILE 500 KG - WALKABLE 500KG

INCASSO LINEARE RGBW L. 620

LINEAR RECESSED RGBW L. 620

RGBW



FORO / HOLE (L'altezza) 610x100x55mm

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2801R/RCRC.MB99	MEDIO/24° MEDIUM/24°	24W with Algorithm	3300 lm	2840 lm	24Vdc	III	67	09	RGBW
2801R/RCRC.O499	OVALE/40°X20° OVAL/40°X20°	24W with Algorithm	3300 lm	2840 lm	24Vdc	III	67	09	RGBW
2801R/RCRC.WB99	LARGO/35° WIDE/35°	24W with Algorithm	3300 lm	2840 lm	24Vdc	III	67	09	RGBW
2801R/RCRC.SW99	MOLTO LARGO/54° SUPER WIDE/54°	24W with Algorithm	3300 lm	2840 lm	24Vdc	III	67	09	RGBW

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

CALPESTATBILE 500 KG - WALKABLE 500KG


ACCESSORI

ACCESSORIES

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.CNT.001	TASTIERA RGBW 16DMX CH.12-24VDC RGBW CONTROLLER 16DMX CH.12-24VDC
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	E.CNT.002	TASTIERA RGBW 1024DMX CH. 5-15VDC RGBW CONTROLLER 1024DMX CH. 5-15VDC
E.TRA.579	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67	E.TRA.594	SPLITTER DMX-RDM 2 CANALI SPLITTER DMX-RDM 2 CHANNELS
E.TRA.592	ALIMENTATORE ON/OFF ELG 240W 24VDC IP67 DRIVER ON/OFF ELG 240W 24VDC IP67		

INCASSO LINEARE RGBW L. 900**LINEAR RECESSED RGBW L. 900**

RGBW

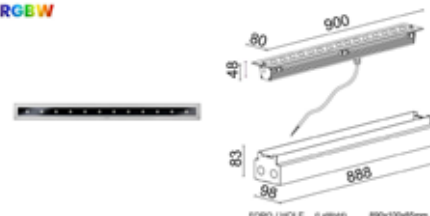

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2802R/RCRC.MB99	MEDIO/24° MEDIUM/24°	36W with Algorithm	4950 lm	4260 lm	24Vdc	III	67	09	RGBW
2802R/RCRC.O499	OVALE/40°X20° OVAL/40°X20°	36W with Algorithm	4950 lm	4260 lm	24Vdc	III	67	09	RGBW
2802R/RCRC.WB99	LARGO/35° WIDE/35°	36W with Algorithm	4950 lm	4260 lm	24Vdc	III	67	09	RGBW
2802R/RCRC.SW99	MOLTO LARGO/54° SUPER WIDE/54°	36W with Algorithm	4950 lm	4260 lm	24Vdc	III	67	09	RGBW


VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

CALPESTATBILE 500 KG - WALKABLE 500KG

INCASSO LINEARE RGBW L. 1180**LINEAR RECESSED RGBW L. 1180**

RGBW

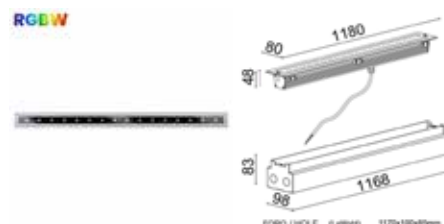

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2803R/RCRC.MB99	MEDIO/24° MEDIUM/24°	48W with Algorithm	6600 lm	5680 lm	24Vdc	III	67	09	RGBW
2803R/RCRC.O499	OVALE/40°X20° OVAL/40°X20°	48W with Algorithm	6600 lm	5680 lm	24Vdc	III	67	09	RGBW
2803R/RCRC.WB99	LARGO/35° WIDE/35°	48W with Algorithm	6600 lm	5680 lm	24Vdc	III	67	09	RGBW
2803R/RCRC.SW99	MOLTO LARGO/54° SUPER WIDE/54°	48W with Algorithm	6600 lm	5680 lm	24Vdc	III	67	09	RGBW

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

CALPESTATBILE 500 KG - WALKABLE 500KG

ACCESSORI**ACCESSORIES**

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.CNT.001	TASTIERA RGBW 16DMX CH. 12-24VDC RGBW CONTROLLER 16DMX CH. 12-24VDC
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	E.CNT.002	TASTIERA RGBW 1024DMX CH. 5-15VDC RGBW CONTROLLER 1024DMX CH. 5-15VDC
E.TRA.579	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67	E.TRA.594	SPLITTER DMX-RDM 2 CANALI SPLITTER DMX-RDM 2 CHANNELS
E.TRA.592	ALIMENTATORE ON/OFF ELG 240W 24VDC IP67 DRIVER ON/OFF ELG 240W 24VDC IP67		

ACCESSORI

ACCESSORIES

CONNETTORI

CONNECTORS



MOR685P/2V

Connettore IP68 5Poli/2Vie 5 x 2.5 mm²
Connector IP68 5Poles/2Ways 5 x 2.5 mm²
 L 109 x Ø 31



MOR685P/3V

Connettore a Y IP68 5Poli/3Vie 5 x 2.5 mm²
Connector Y IP68 5Poles/3Ways 5 x 2.5 mm²
 L 140 x W 72 x H 33

ALIMENTATORI 24Vdc

DRIVER 24Vdc



E.TRA.579

Cod. 2800R - 1 Driver for 1-4 Lamps
 Cod. 2801R - 1 Driver for 1-2 Lamps
 Cod. 2802R - 1 Driver for 1 Lamp
 Cod. 2803R - 1 Driver for 1 Lamp

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
 L 140 x W 63 x H 32



E.TRA.592

Cod. 2800R - 1 Driver for 5-9 Lamps
 Cod. 2801R - 1 Driver for 3-5 Lamps
 Cod. 2802R - 1 Driver for 2-3 Lamps
 Cod. 2803R - 1 Driver for 1 Lamps

Alimentatore ON/OFF ELG 240W 24Vdc IP67
Driver ON/OFF ELG 240W 24Vdc IP67
 L 244 x W 71 x H 38

CENTRALINE RGBW

RGBW CONTROL UNITS



E.TRA.594

Splitter DMX-RDM 2 Canali
Splitter DMX-RDM 2 Channels
 L 88 x W 54 x H 26

CONTROLLER TOUCH

TOUCH CONTROLLER



E.CNT.001

Tastiera RGBW 16DMX Ch. 12-24Vdc
RGBW Controller 16DMX Ch. 12-24Vdc
 L 75 x W 29.5 x H 120



E.CNT.002

Tastiera RGBW 1024DMX Ch. 5-15Vdc
RGBW Controller 1024DMX Ch. 5-15Vdc
 L 146 x W 10 x H 106

