

3 INCASSI A PARETE

Gli incassi a parete sono progettati per integrarsi armoniosamente con l'architettura, offrendo soluzioni luminose precise, sicure e minimali. Ideali per esterni, questi apparecchi sono pensati per guidare percorsi, segnalare passaggi e definire spazi attraverso una luce discreta ma efficace. Grazie al design compatto e alla posa a filo parete, garantiscono un impatto visivo minimo e una resa luminosa mirata. Disponibili in diverse forme, finiture e distribuzioni luminose.

Wall recessed are designed to blend harmoniously with the architecture, offering precise, safe and minimal lighting solutions. Ideal for outdoor use, these luminaires are designed to guide paths, signal passages and define spaces through a discreet but effective light. Thanks to their compact design and flush-mounted wall installation, they guarantee a minimal visual impact and targeted light output. Available in different shapes, finishes and light distributions.





CUT 45

Incassato per effetti di luce Ø45
Recessed for light effects Ø45

DESCRIZIONE DESCRIZIONE

Cut è la nuova linea di segnapasso a luce radente nata per creare suggestivi effetti di luce ed ombra. Ideale per dare vita a percorsi luminosi residenziali o pubblici, Cut trova facile collocazione anche a parete o soffitto, rendendosi quasi invisibile ma facendo in modo che la luce e l'atmosfera create siano le protagoniste della scena. Proposto ad una, due o quattro fessure, Cut diventa l'apparecchio ideale per effetti morbidi o d'accento, per installazioni singole o in serie. Il grado di protezione IP67 ed il sistema AcquaStop per la protezione anti-condensa, infine, rendono Cut un prodotto affidabile e sicuro, ideale per suscitare emozioni di luce.

Cut is the new line of steplight born to create suggestive light and shadow effects. Ideal for creating residential or public lighting paths, Cut is easily placed on the wall or ceiling, making it almost invisible but ensuring that the light and atmosphere created are the protagonists of the scene. Offered with one, two or four slots, Cut becomes the ideal device for soft effects or accents, for single installations or in series. The IP67 protection rating and the AcquaStop system for anti-condensation protection make Cut a reliable and safe product, ideal to arouse emotions of light.

INSTALLAZIONE INSTALLATION

Incasso a terra o parete

Ground or wall recessed

CORPO BODY

Alluminio da tornitura Serie 6000 anticorodal, per maggiore resistenza alla corrosione

Anticorodal turning aluminum 6000 Series, for greater corrosion resistance

BOX BOX

Polipropilene (PP) 30% fibra stabilizzata UV GWT750

Polypropylene (PP) 30% fiber UV stabilized GWT750

SCHERMO SCREEN

Policarbonato trasparente

Transparent polycarbonate

GUARNIZIONI SEALS

EPDM

EPDM

VERNICIATURA FINISHING

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder





1 FINESTRA

1 WINDOW



4045R/WRRC1L

WATTAGGIO / WATTAGE 2W

INTERASSE APPARECCHI /
DISTANCE BETWEEN FIXTURES 2M



2 FINESTRE

2 WINDOWS



4045R/WRRC2L

WATTAGGIO / WATTAGE 2W

INTERASSE APPARECCHI /
DISTANCE BETWEEN FIXTURES 2M



4 FINESTRA

4 WINDOWS



4045R/WRRC4L

WATTAGGIO / WATTAGE 2W

INTERASSE APPARECCHI /
DISTANCE BETWEEN FIXTURES 2M



CONFIG.
CODICE
CODE
CONFIG.

▲ → H=2700K
W=3000K
N=4000K

VERSIONE IN
TENSIONE
CONSTANT
VOLTAGE

2W CON DRIVER REMOTO 24Vdc
2W REMOTE DRIVER 24Vdc

VERSIONE IN
CORRENTE
CONSTANT
CURRENT

2W CON DRIVER REMOTO MAX 700mA DC
2W REMOTE DRIVER MAX 700mA DC




Ø45




Ø45




Ø45



Ø35



Ø35




Ø35

IP 67

IK 08




INCASSO 1 FINESTRA Ø45**24VDC***RECESSED 1 WINDOW Ø45***24VDC**

CODICE CODE	FASCIO BEAM		WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4045R/▲RRC1L	 DIFFUSO/1 FINESTRA DIFFUSED/1 WINDOW		2W	221 lm	21 lm	24Vdc	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE


ON/OFF

INCASSO 2 FINESTRE Ø45**24VDC***RECESSED 2 WINDOWS Ø45***24VDC**

CODICE CODE	FASCIO BEAM		WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4045R/▲RRC2L	 DIFFUSO/2 FINESTRE DIFFUSED/2 WINDOWS		2W	221 lm	35 lm	24Vdc	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE

ON/OFF

INCASSO 4 FINESTRE Ø45**24VDC***RECESSED 4 WINDOWS Ø45***24VDC**

CODICE CODE	FASCIO BEAM		WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4045R/▲RRC4L	 DIFFUSO/4 FINESTRE DIFFUSED/4 WINDOWS		2W	221 lm	53 lm	24Vdc	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE

ON/OFF

ACCESSORI*ACCESSORIES*

D.BOX.030.01	CASSAFORMA INTERRATA IN POLIPROPILENE PER RIM/CUT 45 INGROUND POLYPROPYLENE FORMWORK FOR RIM/CUT 45	E.TRA.632 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20
D.BOX.032.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 45 SHORT ALUMINUM FORMWORK FOR RIM/CUT 45	E.TRA.577 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.579 1 DRIVER FOR 9-25 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF

INCASSO 1 FINESTRA Ø45**MAX 700MA***RECESSED 1 WINDOW Ø45***MAX 700MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4045R/▲RCC1L	 DIFFUSO/1 FINESTRA <i>DIFFUSED/1 WINDOW</i>	2W	286 lm	31 lm	max 700mA	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE


DIMMERABILE - DIMMABLE

INCASSO 2 FINESTRE Ø45**MAX 700MA***RECESSED 2 WINDOWS Ø45***MAX 700MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4045R/▲RCC2L	 DIFFUSO/2 FINESTRE <i>DIFFUSED/2 WINDOWS</i>	2W	286 lm	53 lm	max 700mA	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE

DIMMERABILE - DIMMABLE

INCASSO 4 FINESTRE Ø45**MAX 700MA***RECESSED 4 WINDOWS Ø45***MAX 700MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4045R/▲RCC4L	 DIFFUSO/4 FINESTRE <i>DIFFUSED/4 WINDOWS</i>	2W	286 lm	81 lm	max 700mA	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE

DIMMERABILE - DIMMABLE

ACCESSORI*ACCESSORIES*

D.BOX.030.01	CASSAFORMA INTERRATA IN POLIPROPILENE PER RIM/CUT 45 INGROUND POLYPROPYLENE FORMWORK FOR RIM/CUT 45	E.TRA.636.700 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE CASAMBI 60W 700MA IP20 DRIVER CASAMBI 60W 700MA IP20
D.BOX.032.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 45 SHORT ALUMINUM FORMWORK FOR RIM/CUT 45	E.TRA.658.700 1 DRIVER FOR 1-12 LAMPS	ALIMENTATORE ON/OFF 23W 700MA IP67 DRIVER ON/OFF 23W 700MA IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.659.700 1 DRIVER FOR 1-12 LAMPS	ALIMENTATORE DALI2 23W 700MA IP67 DRIVER DALI2 23W 700MA IP67
E.TRA.621.700 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 20W 700MA IP20 DRIVER ON/OFF 20W 700MA IP20	HUB.700.001.ND 1 HUB FOR 1-8 LAMPS	HUB 700MA IP66 ON/OFF CON DRIVER 60W IP20 HUB 700MA IP66 ON/OFF WITH DRIVER 60W IP20
E.TRA.623.700 1 DRIVER FOR 1-14 LAMPS	ALIMENTATORE ON/OFF 36W 700MA IP20 DRIVER ON/OFF 36W 700MA IP20	HUB.700.001.DA2 1 HUB FOR 1-8 LAMPS	HUB 700MA IP66 DALI-2 CON DRIVER 60W IP20 HUB 700MA IP66 DALI-2 WITH DRIVER 60W IP20
E.TRA.634.700 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE ON/OFF 60W 700MA IP20 DRIVER ON/OFF 60W 700MA IP20	HUB.700.001.CA 1 HUB FOR 1-8 LAMPS	HUB 700MA IP66 CASAMBI CON DRIVER 60W IP20 HUB 700MA IP66 CASAMBI WITH DRIVER 60W IP20
E.TRA.635.700 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE DALI2 60W 700MA IP20 DRIVER DALI2 60W 700MA IP20		

ACCESSORI

ACCESSORIES

BOX DA INCASSO

RECESSED BOXES



D.BOX.030.01

Cassaforma interrata in polipropilene per Rim/Cut 45
Inground polypropylene formwork for Rim/Cut 45
H 100 x Ø 115



D.BOX.032.01

Cassaforma corta in alluminio per Rim/Cut 45
Short aluminum formwork for Rim/Cut 45
H 80 x Ø 40

CONNETTORI

CONNECTORS



MOR682P/2V

Connettore IP68 2Poli/2Vie 2 x 1 mm²
Connector IP68 2Poles/2Ways 2 x 1 mm²
L 72 x Ø 22

ALIMENTATORI 24Vdc

DRIVER 24Vdc



E.TRA.577

1 Driver for 1-8 Lamps

Alimentatore ON/OFF 25W 24Vdc IP67
Driver ON/OFF 25W 24Vdc IP67
L 148 x W 40 x H 32



E.TRA.579

1 Driver for 9-25 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
L 140 x W 63 x H 32



E.TRA.631

1 Driver for 1-5 Lamps


Alimentatore ON/OFF 15W 24Vdc IP20
Driver ON/OFF 15W 24Vdc IP20
L 106 x W 33 x H 22



E.TRA.632

1 Driver for 1-20 Lamps

Alimentatore ON/OFF 70W 24Vdc IP20
Driver ON/OFF 70W 24Vdc IP20
L 124 x W 80 x H 22

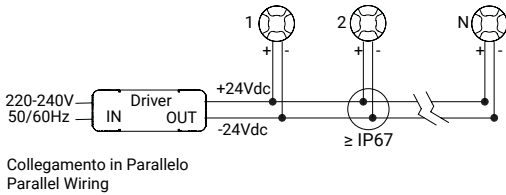

HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA 24Vdc


HUB - READY TO CONNECT SYSTEM 24Vdc



HUB.24V.001.ND


1 Hub for 1-8 Lamps

Hub 70W 24Vdc IP66 ON/OFF
Hub 70W 24Vdc IP66 ON/OFF
L 235 x W 200 x H 92



ALIMENTATORI CC – 700mA

DRIVER CC – 700mA

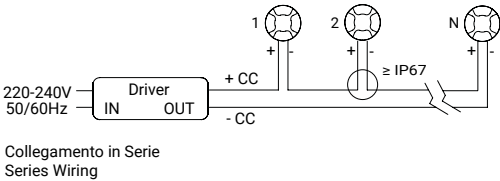

E.TRA.621.700
1 Driver for 1-8 Lamps
Alimentatore ON/OFF 20W 700mA IP20
Driver ON/OFF 20W 700mA IP20
L 111 x W 52 x H 22



E.TRA.623.700
1 Driver for 1-14 Lamps
Alimentatore ON/OFF 36W 700mA IP20
Driver ON/OFF 36W 700mA IP20
L 163 x W 30 x H 21



E.TRA.634.700
1 Driver for 1-20 Lamps
Alimentatore ON/OFF 60W 700mA IP20
Driver ON/OFF 60W 700mA IP20
L 124 x W 80 x H 22



E.TRA.635.700
1 Driver for 1-20 Lamps
Alimentatore DALI2 60W 700mA IP20
Driver DALI2 60W 700mA IP20
L 124 x W 80 x H 22



E.TRA.636.700
1 Driver for 1-20 Lamps
Alimentatore CASAMBI 60W 700mA IP20
Driver CASAMBI 60W 700mA IP20
L 124 x W 80 x H 22



E.TRA.658.700
1 Driver for 1-12 Lamps
Alimentatore ON/OFF 23W 700mA IP67
Driver ON/OFF 23W 700mA IP67
L 124 x W 47 x H 26



E.TRA.659.700
1 Driver for 1-12 Lamps
Alimentatore DALI2 23W 700mA IP67
Driver DALI2 23W 700mA IP67
L 124 x W 47 x H 26

HUB – SISTEMI DI CONNESSIONE SEMPLIFICATA CC 700mA

HUB – READY TO CONNECT SYSTEM CC 700mA




HUB.700.001.CA
1 Hub for 1-8 Lamps
Hub 700mA IP66 CASAMBI con driver 60W IP20
Hub 700mA IP66 CASAMBI with driver 60W IP20
L 235 x W 200 x H 92



HUB.700.001.DA2
1 Hub for 1-8 Lamps
Hub 700mA IP66 DALI-2 con driver 60W IP20
Hub 700mA IP66 DALI-2 with driver 60W IP20
L 235 x W 200 x H 92



HUB.700.001.ND
1 Hub for 1-8 Lamps
Hub 700mA IP66 ON/OFF con driver 60W IP20
Hub 700mA IP66 ON/OFF with driver 60W IP20
L 235 x W 200 x H 92

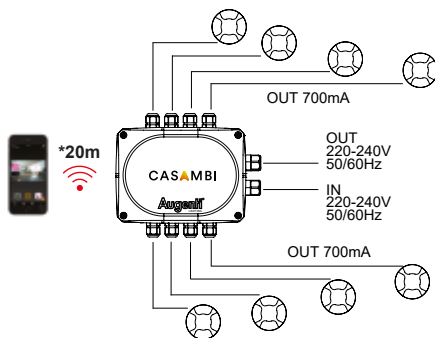





CUT 70

Incassato per effetti di luce Ø70
Recessed for light effects Ø70

DESCRIZIONE DESCRIZIONE

Cut è la nuova linea di segnapasso a luce radente nata per creare suggestivi effetti di luce ed ombra. Ideale per dare vita a percorsi luminosi residenziali o pubblici, Cut trova facile collocazione anche a parete o soffitto, rendendosi quasi invisibile ma facendo in modo che la luce e l'atmosfera create siano le protagoniste della scena. Proposto ad una, due o quattro fessure, Cut diventa l'apparecchio ideale per effetti morbidi o d'accento, per installazioni singole o in serie. Il grado di protezione IP67 ed il sistema AcquaStop per la protezione anti-condensa, infine, rendono Cut un prodotto affidabile e sicuro, ideale per suscitare emozioni di luce.

Cut is the new line of steplight born to create suggestive light and shadow effects. Ideal for creating residential or public lighting paths, Cut is easily placed on the wall or ceiling, making it almost invisible but ensuring that the light and atmosphere created are the protagonists of the scene. Offered with one, two or four slots, Cut becomes the ideal device for soft effects or accents, for single installations or in series. The IP67 protection rating and the AcquaStop system for anti-condensation protection make Cut a reliable and safe product, ideal to arouse emotions of light.

INSTALLAZIONE INSTALLATION

Incasso a terra o parete

Ground or wall recessed

CORPO BODY

Alluminio da tornitura Serie 6000 anticorodal, per maggiore resistenza alla corrosione

Anticorodal turning aluminum 6000 Series, for greater corrosion resistance

BOX BOX

Polipropilene (PP) 30% fibra stabilizzata UV GWT750

Polypropylene (PP) 30% fiber UV stabilized GWT750

SCHERMO SCREEN

Policarbonato trasparente

Transparent polycarbonate

GUARNIZIONI SEALS



EPDM

EPDM

VERNICIATURA FINISHING

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder





1 FINESTRA
1 WINDOW



4070R/WRRC1L

WATTAGGIO / WATTAGE **6W**

INTERASSE APPARECCHI /
DISTANCE BETWEEN FIXTURES **2M**



2 FINESTRE
2 WINDOWS



4070R/WRRC2L

WATTAGGIO / WATTAGE **6W**

INTERASSE APPARECCHI /
DISTANCE BETWEEN FIXTURES **2M**



4 FINESTRA
4 WINDOWS



4070R/WRRC4L

WATTAGGIO / WATTAGE **6W**

INTERASSE APPARECCHI /
DISTANCE BETWEEN FIXTURES **2M**



**CONFIG.
CODICE**
CODE
CONFIG.


▲ → **H=2700K**
W=3000K
N=4000K

**VERSIONE IN
TENSIONE**
CONSTANT
VOLTAGE

6W CON DRIVER REMOTO 24Vdc
6W REMOTE DRIVER 24Vdc

**VERSIONE IN
CORRENTE**
CONSTANT
CURRENT


6W CON DRIVER REMOTO MAX 500mA DC
6W REMOTE DRIVER MAX 500mA DC

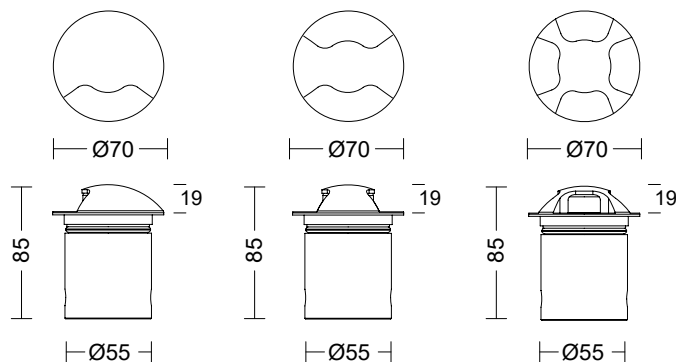

IP 67


IK 08



INCASSO 1 FINESTRA Ø70**24VDC***RECESSED 1 WINDOW Ø70***24VDC**


CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4070R/▲RRC1L	DIFFUSO/1 FINESTRA DIFFUSED/1 WINDOW	6W	690 lm	41 lm	24Vdc	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE
ON/OFF

INCASSO 2 FINESTRE Ø70**24VDC***RECESSED 2 WINDOWS Ø70***24VDC**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4070R/▲RRC2L	DIFFUSO/2 FINESTRE DIFFUSED/2 WINDOWS	6W	690 lm	77 lm	24Vdc	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE
ON/OFF


INCASSO 4 FINESTRE Ø70**24VDC***RECESSED 4 WINDOWS Ø70***24VDC**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4070R/▲RRC4L	DIFFUSO/4 FINESTRE DIFFUSED/4 WINDOWS	6W	690 lm	81 lm	24Vdc	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE
ON/OFF

ACCESSORI*ACCESSORIES*


A.BOX.019.01	CASSAFORMA INTERRATA IN POLICARBONATO PER RIM/CUT 70 INGROUND POLYCARBONATE FORMWORK FOR RIM/CUT 70	E.TRA.632 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20
D.BOX.033.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 70 SHORT ALUMINUM FORMWORK FOR RIM/CUT 70	E.TRA.577 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.579 1 DRIVER FOR 4-12 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-2 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF

INCASSO 1 FINESTRA Ø70**MAX 500MA***RECESSED 1 WINDOW Ø70***MAX 500MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4070R/▲RCC1L	 DIFFUSO/1 FINESTRA DIFFUSED/1 WINDOW	6W	690 lm	41 lm	max 500mA	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE


DIMMERABILE - DIMMABLE

INCASSO 2 FINESTRE Ø70**MAX 500MA***RECESSED 2 WINDOWS Ø70***MAX 500MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4070R/▲RCC2L	 DIFFUSO/2 FINESTRE DIFFUSED/2 WINDOWS	6W	690 lm	77 lm	max 500mA	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE

DIMMERABILE - DIMMABLE

INCASSO 4 FINESTRE Ø70**MAX 500MA***RECESSED 4 WINDOWS Ø70***MAX 500MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
4070R/▲RCC4L	 DIFFUSO/4 FINESTRE DIFFUSED/4 WINDOWS	6W	690 lm	81 lm	max 500mA	III	67	08	80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE

DIMMERABILE - DIMMABLE

ACCESSORI*ACCESSORIES*

A.BOX.019.01	CASSAFORMA INTERRATA IN POLICARBONATO PER RIM/CUT 70 INGROUND POLYCARBONATE FORMWORK FOR RIM/CUT 70	E.TRA.636.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE CASAMBI 60W 500MA IP20 DRIVER CASAMBI 60W 500MA IP20
D.BOX.033.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 70 SHORT ALUMINUM FORMWORK FOR RIM/CUT 70	E.TRA.658.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 23W 500MA IP67 DRIVER ON/OFF 23W 500MA IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.659.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE DALI2 23W 500MA IP67 DRIVER DALI2 23W 500MA IP67
E.TRA.621.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 20W 500MA IP20 DRIVER ON/OFF 20W 500MA IP20	HUB.500.001.ND 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 ON/OFF CON DRIVER 60W IP20 HUB 500MA IP66 ON/OFF WITH DRIVER 60W IP20
E.TRA.623.500 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 36W 500MA IP20 DRIVER ON/OFF 36W 500MA IP20	HUB.500.001.DA2 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 DALI-2 CON DRIVER 60W IP20 HUB 500MA IP66 DALI-2 WITH DRIVER 60W IP20
E.TRA.634.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 60W 500MA IP20 DRIVER ON/OFF 60W 500MA IP20	HUB.500.001.CA 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 CASAMBI CON DRIVER 60W IP20 HUB 500MA IP66 CASAMBI WITH DRIVER 60W IP20
E.TRA.635.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE DALI2 60W 500MA IP20 DRIVER DALI2 60W 500MA IP20		

ACCESSORI

ACCESSORIES

BOX DA INCASSO

RECESSED BOXES


A.BOX.019.01

Cassaforma interrata in policarbonato per Rim/Cut 70
Inground polycarbonate formwork for Rim/Cut 70
 H 110 x Ø 135


D.BOX.033.01

Cassaforma corta in alluminio per Rim/Cut 70
Short aluminum formwork for Rim/Cut 70
 H 100 x Ø 60

CONNETTORI


CONNECTORS


MOR682P/2V

Connettore IP68 2Poli/2Vie 2 x 1 mm²
Connector IP68 2Poles/2Ways 2 x 1 mm²
 L 72 x Ø 22

ALIMENTATORI 24Vdc

DRIVER 24Vdc

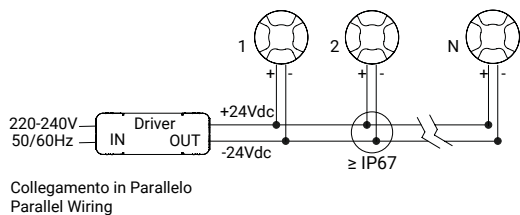
E.TRA.577

1 Driver for 1-3 Lamps

Alimentatore ON/OFF 25W 24Vdc IP67
Driver ON/OFF 25W 24Vdc IP67
 L 148 x W 40 x H 32


E.TRA.579

1 Driver for 4-12 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
 L 140 x W 63 x H 32


E.TRA.631

1 Driver for 1-2 Lamps

Alimentatore ON/OFF 15W 24Vdc IP20
Driver ON/OFF 15W 24Vdc IP20
 L 106 x W 33 x H 22


E.TRA.632

1 Driver for 1-8 Lamps

Alimentatore ON/OFF 70W 24Vdc IP20
Driver ON/OFF 70W 24Vdc IP20
 L 124 x W 80 x H 22


HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA 24Vdc

HUB - READY TO CONNECT SYSTEM 24Vdc


HUB.24V.001.ND


1 Hub for 1-8 Lamps

Hub 70W 24Vdc IP66 ON/OFF
Hub 70W 24Vdc IP66 ON/OFF
 L 235 x W 200 x H 92



ALIMENTATORI CC – 500mA

DRIVER CC – 500mA

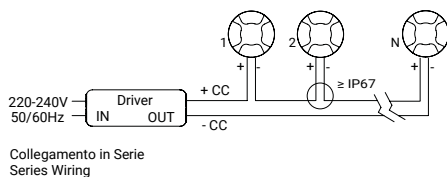

E.TRA.621.500

1 Driver for 1-3 Lamps

Alimentatore ON/OFF 20W 500mA IP20

Driver ON/OFF 20W 500mA IP20

L 111 x W 52 x H 22



E.TRA.623.500

1 Driver for 1-4 Lamps

Alimentatore ON/OFF 36W 500mA IP20

Driver ON/OFF 36W 500mA IP20

L 163 x W 30 x H 21



E.TRA.634.500

1 Driver for 1-5 Lamps

Alimentatore ON/OFF 60W 500mA IP20

Driver ON/OFF 60W 500mA IP20

L 124 x W 80 x H 22



E.TRA.635.500

1 Driver for 1-5 Lamps

Alimentatore DALI2 60W 500mA IP20

Driver DALI2 60W 500mA IP20

L 124 x W 80 x H 22



E.TRA.636.500

1 Driver for 1-5 Lamps

Alimentatore CASAMBI 60W 500mA IP20

Driver CASAMBI 60W 500mA IP20

L 124 x W 80 x H 22



E.TRA.658.500

1 Driver for 1-3 Lamps

Alimentatore ON/OFF 23W 500mA IP67

Driver ON/OFF 23W 500mA IP67

L 124 x W 47 x H 26



E.TRA.659.500

1 Driver for 1-3 Lamps

Alimentatore DALI2 23W 500mA IP67

Driver DALI2 23W 500mA IP67

L 124 x W 47 x H 26

HUB – SISTEMI DI CONNESSIONE SEMPLIFICATA CC 500mA

HUB – READY TO CONNECT SYSTEM CC 500mA



HUB.500.001.CA

1 Hub for 1-5 Lamps

Hub 500mA IP66 CASAMBI con driver 60W IP20

Hub 500mA IP66 CASAMBI with driver 60W IP20

L 235 x W 200 x H 92



HUB.500.001.DA2

1 Hub for 1-5 Lamps

Hub 500mA IP66 DALI-2 con driver 60W IP20

Hub 500mA IP66 DALI-2 with driver 60W IP20

L 235 x W 200 x H 92




HUB.500.001.ND

1 Hub for 1-5 Lamps

Hub 500mA IP66 ON/OFF con driver 60W IP20

Hub 500mA IP66 ON/OFF with driver 60W IP20

L 235 x W 200 x H 92

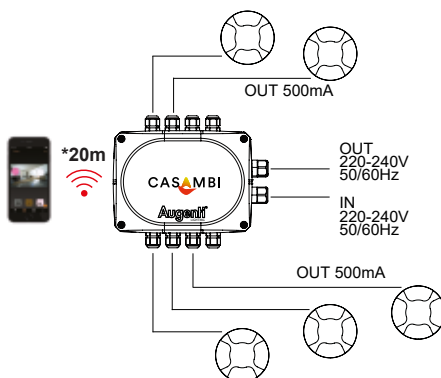





RIM 45

Incassato con ghiera in acciaio Ø45
Recessed with steel ring nut Ø45

DESCRIZIONE DESCRIPTION

Rim, l'ultimo nato tra gli incassati Augenti, è un piccolo ma performante apparecchio da incasso con anello in acciaio. Le dimensioni ridotte e l'installazione semplice e veloce ne permettono la collocazione in ambienti esterni o interni. Rim può infatti essere installato a pavimento, parete o soffitto, integrandosi in modo discreto nell'ambiente, lasciando che la luce e l'atmosfera generate siano gli elementi principali della scena. I fasci proposti sono ideali per effetti morbidi o d'accento, per installazioni singole o in serie. L'anello in acciaio inox 316L ed il sistema AcquaStop per la protezione anti-condensa, rendono Rim un prodotto sicuro e poliedrico, ideale per dare luce alla vostra fantasia.

Rim, the latest of the Augenti recessed models, is a small but powerful recessed appliance with steel ring. The small size and quick and easy installation allow it to be placed in outdoor or indoor environments. Rim can be installed on the floor, wall or ceiling, integrating discreetly into the environment, leaving the light and atmosphere generated to be the main elements of the scene. The proposed beams are ideal for soft or accent effects, for single installations or in series. The 316L stainless steel ring and the AcquaStop system for anti-condensation protection, make Rim a safe and versatile product, ideal to give light to your imagination.

INSTALLAZIONE INSTALLATION

Incasso a terra, parete o soffitto

Ground, wall or ceiling recessed

CORPO BODY

Alluminio da tornitura Serie 6000 anticorrosione, per maggiore resistenza alla corrosione

Anticorrosion turning aluminum 6000 Series, for greater corrosion resistance

BOX BOX

Polipropilene (PP) 30% fibra stabilizzata UV GWT750

Polypropylene (PP) 30% fiber UV stabilized GWT750

SCHERMO SCREEN

Vetro extrachiaro temprato 6 mm

Extra clear tempered glass 6 mm

GUARNIZIONI SEALS

EPDM

EPDM

CORNICE FRAME

Acciaio AISI316L


Stainless steel AISI316L

VERNICIATURA FINISHING

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder



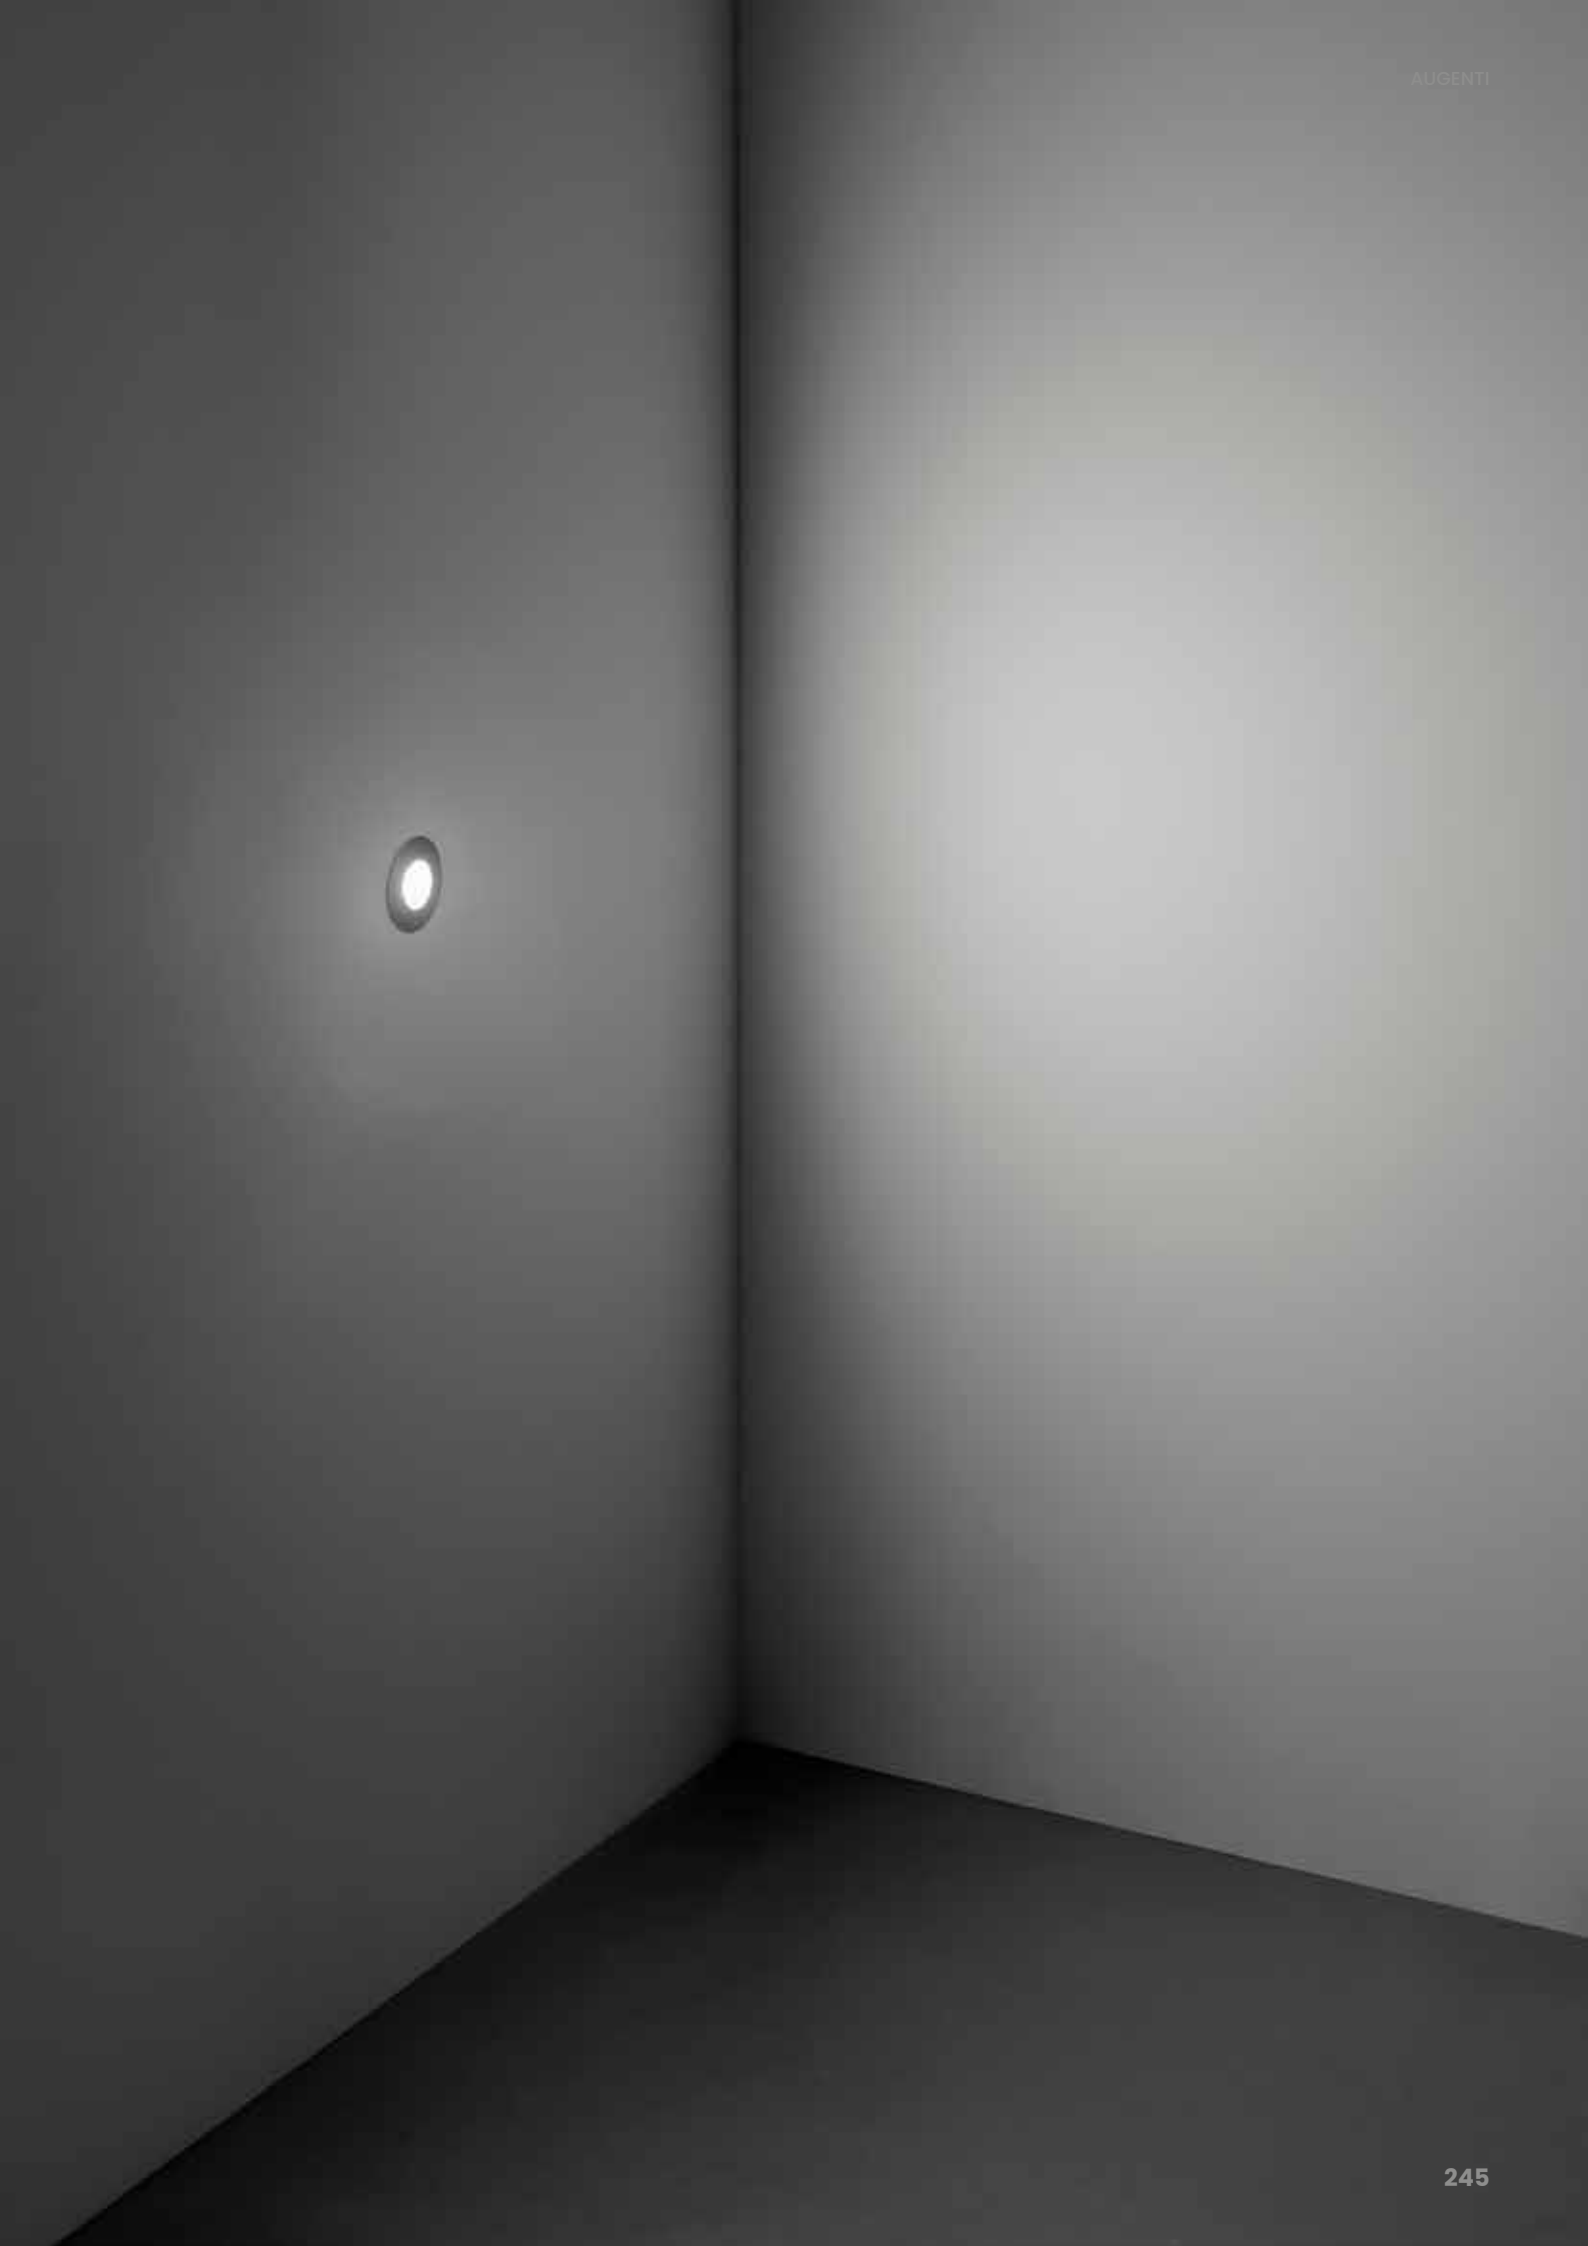



**CONFIG.
CODICE**
CODE
CONFIG.


▲ → **H=2700K**
W=3000K
N=4000K

**VERSIONE IN
TENSIONE**
CONSTANT
VOLTAGE

2W CON DRIVER REMOTO 24Vdc
2W REMOTE DRIVER 24Vdc

**VERSIONE IN
CORRENTE**
CONSTANT
CURRENT

2W CON DRIVER REMOTO MAX 700mA DC
2W REMOTE DRIVER MAX 700mA DC



IP 67

IK 08



**HUB
SYSTEM**

RIM 45

INCASSO CON GHIERA IN ACCIAIO Ø45

24VDC

RECESSED WITH STEEL RING NUT Ø45

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3045R/▲RRCNB99	 STRETTO/14° NARROW/14°	2W	270 lm	220 lm	24Vdc	III	67	08	80
3045R/▲RRCMB99	 MEDIO/30° MEDIUM/30°	2W	270 lm	210 lm	24Vdc	III	67	08	80
3045R/▲RRCWB99	 LARGO/40° WIDE/40°	2W	270 lm	210 lm	24Vdc	III	67	08	80
3045R/▲RRCBW99	 MOLTO LARGO/60° SUPER WIDE/60°	2W	270 lm	210 lm	24Vdc	III	67	08	80
3045R/▲RRCOB99	 OVALE/15°X60° OVAL/15°X60°	2W	270 lm	210 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 6 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 6 MM

ON/OFF

INCASSO CON GHIERA IN ACCIAIO VETRO OPALE Ø45

24VDC

RECESSED WITH STEEL RING NUT OPAL GLASS Ø45

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3045R/▲RRCVS99	 DIFFUSO/120° DIFFUSED/120°	2W	270 lm	28 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 6 MM - EXTRA CLEAR OPAL TEMPERED GLASS 6 MM

ON/OFF

ACCESSORI

ACCESSORIES

D.BOX.030.01	CASSAFORMA INTERRATA IN POLIPROPILENE PER RIM/CUT 45 INGROUND POLYPROPYLENE FORMWORK FOR RIM/CUT 45	E.TRA.632 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20
D.BOX.032.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 45 SHORT ALUMINUM FORMWORK FOR RIM/CUT 45	E.TRA.577 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.579 1 DRIVER FOR 9-25 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF

INCASSO CON GHIERA IN ACCIAIO Ø45

MAX 700MA

RECESSED WITH STEEL RING NUT Ø45

MAX 700MA



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3045R/▲RCCNB99	STRETTO/14° NARROW/14°	2W	300 lm	240 lm	max 700mA	III	67	08	80
3045R/▲RCCMB99	MEDIO/30° MEDIUM/30°	2W	300 lm	230 lm	max 700mA	III	67	08	80
3045R/▲RCCWB99	LARGO/40° WIDE/40°	2W	300 lm	230 lm	max 700mA	III	67	08	80
3045R/▲RCCSW99	MOLTO LARGO/60° SUPER WIDE/60°	2W	300 lm	230 lm	max 700mA	III	67	08	80
3045R/▲RCCOB199	OVALE/15°X60° OVAL/15°X60°	2W	300 lm	230 lm	max 700mA	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 6 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 6 MM

DIMMERABILE - DIMMABLE

INCASSO CON GHIERA IN ACCIAIO VETRO OPALE Ø45

MAX 700MA

RECESSED WITH STEEL RING NUT OPAL GLASS Ø45

MAX 700MA



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3045R/▲RCCVS99	DIFFUSO/120° DIFFUSED/120°	2W	300 lm	32 lm	max 700mA	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 6 MM - EXTRA CLEAR OPAL TEMPERED GLASS 6 MM

DIMMERABILE - DIMMABLE

ACCESSORI


ACCESSORIES

D.BOX.030.01	CASSAFORMA INTERRATA IN POLIPROPILENE PER RIM/CUT 45 INGROUND POLYPROPYLENE FORMWORK FOR RIM/CUT 45	E.TRA.636.700 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE CASAMBI 60W 700MA IP20 DRIVER CASAMBI 60W 700MA IP20
D.BOX.032.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 45 SHORT ALUMINUM FORMWORK FOR RIM/CUT 45	E.TRA.658.700 1 DRIVER FOR 1-12 LAMPS	ALIMENTATORE ON/OFF 23W 700MA IP67 DRIVER ON/OFF 23W 700MA IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.659.700 1 DRIVER FOR 1-12 LAMPS	ALIMENTATORE DALI2 23W 700MA IP67 DRIVER DALI2 23W 700MA IP67
E.TRA.621.700 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 20W 700MA IP20 DRIVER ON/OFF 20W 700MA IP20	HUB.700.001.ND 1 HUB FOR 1-8 LAMPS	HUB 700MA IP66 ON/OFF CON DRIVER 60W IP20 HUB 700MA IP66 ON/OFF WITH DRIVER 60W IP20
E.TRA.623.700 1 DRIVER FOR 1-14 LAMPS	ALIMENTATORE ON/OFF 36W 700MA IP20 DRIVER ON/OFF 36W 700MA IP20	HUB.700.001.DA2 1 HUB FOR 1-8 LAMPS	HUB 700MA IP66 DALI-2 CON DRIVER 60W IP20 HUB 700MA IP66 DALI-2 WITH DRIVER 60W IP20
E.TRA.634.700 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE ON/OFF 60W 700MA IP20 DRIVER ON/OFF 60W 700MA IP20	HUB.700.001.CA 1 HUB FOR 1-8 LAMPS	HUB 700MA IP66 CASAMBI CON DRIVER 60W IP20 HUB 700MA IP66 CASAMBI WITH DRIVER 60W IP20
E.TRA.635.700 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE DALI2 60W 700MA IP20 DRIVER DALI2 60W 700MA IP20		

RIM 45 PAINTED

INCASSO CON GHIERA IN ACCIAIO VERNICIATO Ø45 24VDC

RECESSED WITH PAINTED STEEL RING NUT Ø45
24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3045R/▲RRCNB	 STRETTO/14° NARROW/14°	2W	270 lm	220 lm	24Vdc	III	67	08	80
3045R/▲RRCMB	 MEDIO/30° MEDIUM/30°	2W	270 lm	210 lm	24Vdc	III	67	08	80
3045R/▲RRCWB	 LARGO/40° WIDE/40°	2W	270 lm	210 lm	24Vdc	III	67	08	80
3045R/▲RRCSW	 MOLTO LARGO/60° SUPER WIDE/60°	2W	270 lm	210 lm	24Vdc	III	67	08	80
3045R/▲RRCOB1	 OVALE/15°X60° OVAL/15°X60°	2W	270 lm	210 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 6 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 6 MM
ON/OFF

INCASSO CON GHIERA IN ACCIAIO VERNICIATO VETRO OPALE Ø45 24VDC

RECESSED WITH PAINTED STEEL RING NUT OPAL GLASS Ø45
24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3045R/▲RRCVS	 DIFFUSO/120° DIFFUSED/120°	2W	270 lm	28 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 6 MM - EXTRA CLEAR OPAL TEMPERED GLASS 6 MM
ON/OFF

ACCESSORI

ACCESSORIES

D.BOX.030.01	CASSAFORMA INTERRATA IN POLIPROPILENE PER RIM/CUT 45 INGROUND POLYPROPYLENE FORMWORK FOR RIM/CUT 45	E.TRA.632 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20
D.BOX.032.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 45 SHORT ALUMINUM FORMWORK FOR RIM/CUT 45	E.TRA.577 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.579 1 DRIVER FOR 9-25 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF

INCASSO CON GHIERA IN ACCIAIO VERNICIATO Ø45
MAX 700MA

RECESSED WITH PAINTED STEEL RING NUT Ø45
MAX 700MA



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3045R/▲RCCNB	 STRETTO/14° NARROW/14°	2W	300 lm	240 lm	max 700mA	III	67	08	80
3045R/▲RCCMB	 MEDIO/30° MEDIUM/30°	2W	300 lm	230 lm	max 700mA	III	67	08	80
3045R/▲RCCWB	 LARGO/40° WIDE/40°	2W	300 lm	230 lm	max 700mA	III	67	08	80
3045R/▲RCCSW	 MOLTO LARGO/60° SUPER WIDE/60°	2W	300 lm	230 lm	max 700mA	III	67	08	80
3045R/▲RCCOBI	 OVALE/15°X60° OVAL/15°X60°	2W	300 lm	230 lm	max 700mA	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 6 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 6 MM
DIMMERABILE - DIMMABLE

INCASSO CON GHIERA IN ACCIAIO VERNICIATO VETRO OPALE Ø45
MAX 700MA

RECESSED WITH PAINTED STEEL RING NUT OPAL GLASS Ø45
MAX 700MA



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3045R/▲RCCVS	 DIFFUSO/120° DIFFUSED/120°	2W	300 lm	32 lm	max 700mA	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 6 MM - EXTRA CLEAR OPAL TEMPERED GLASS 6 MM
DIMMERABILE - DIMMABLE

ACCESSORI
ACCESSORIES

D.BOX.030.01	CASSAFORMA INTERRATA IN POLIPROPILENE PER RIM/CUT 45 INGROUND POLYPROPYLENE FORMWORK FOR RIM/CUT 45	E.TRA.636.700	1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE CASAMBI 60W 700MA IP20 DRIVER CASAMBI 60W 700MA IP20
D.BOX.032.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 45 SHORT ALUMINUM FORMWORK FOR RIM/CUT 45	E.TRA.658.700	1 DRIVER FOR 1-12 LAMPS	ALIMENTATORE ON/OFF 23W 700MA IP67 DRIVER ON/OFF 23W 700MA IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.659.700	1 DRIVER FOR 1-12 LAMPS	ALIMENTATORE DALI2 23W 700MA IP67 DRIVER DALI2 23W 700MA IP67
E.TRA.621.700	ALIMENTATORE ON/OFF 20W 700MA IP20 DRIVER ON/OFF 20W 700MA IP20	HUB.700.001.ND	1 HUB FOR 1-8 LAMPS	HUB 700MA IP66 ON/OFF CON DRIVER 60W IP20 HUB 700MA IP66 ON/OFF WITH DRIVER 60W IP20
E.TRA.623.700	ALIMENTATORE ON/OFF 36W 700MA IP20 DRIVER ON/OFF 36W 700MA IP20	HUB.700.001.DA2	1 HUB FOR 1-8 LAMPS	HUB 700MA IP66 DALI-2 CON DRIVER 60W IP20 HUB 700MA IP66 DALI-2 WITH DRIVER 60W IP20
E.TRA.634.700	ALIMENTATORE ON/OFF 60W 700MA IP20 DRIVER ON/OFF 60W 700MA IP20	HUB.700.001.CA	1 HUB FOR 1-8 LAMPS	HUB 700MA IP66 CASAMBI CON DRIVER 60W IP20 HUB 700MA IP66 CASAMBI WITH DRIVER 60W IP20
E.TRA.635.700	ALIMENTATORE DALI2 60W 700MA IP20 DRIVER DALI2 60W 700MA IP20			

ACCESSORI

ACCESSORIES

BOX DA INCASSO

RECESSED BOXES



D.BOX.030.01

Cassaforma interrata in polipropilene per Rim/Cut 45
Inground polypropylene formwork for Rim/Cut 45
H 100 x Ø 115



D.BOX.032.01

Cassaforma corta in alluminio per Rim/Cut 45
Short aluminum formwork for Rim/Cut 45
H 80 x Ø 40

CONNETTORI

CONNECTORS



MOR682P/2V

Connettore IP68 2Poli/2Vie 2 x 1 mm²
Connector IP68 2Poles/2Ways 2 x 1 mm²
L 72 x Ø 22

ALIMENTATORI 24Vdc

DRIVER 24Vdc



E.TRA.577

1 Driver for 1-8 Lamps

Alimentatore ON/OFF 25W 24Vdc IP67
Driver ON/OFF 25W 24Vdc IP67
L 148 x W 40 x H 32



E.TRA.579

1 Driver for 9-25 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
L 140 x W 63 x H 32



E.TRA.631

1 Driver for 1-5 Lamps


Alimentatore ON/OFF 15W 24Vdc IP20
Driver ON/OFF 15W 24Vdc IP20
L 106 x W 33 x H 22



E.TRA.632

1 Driver for 1-20 Lamps

Alimentatore ON/OFF 70W 24Vdc IP20
Driver ON/OFF 70W 24Vdc IP20
L 124 x W 80 x H 22

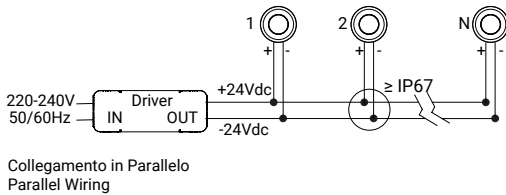

HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA 24Vdc


HUB - READY TO CONNECT SYSTEM 24Vdc



HUB.24V.001.ND


1 Hub for 1-8 Lamps

Hub 70W 24Vdc IP66 ON/OFF
Hub 70W 24Vdc IP66 ON/OFF
L 235 x W 200 x H 92



ALIMENTATORI CC – 700mA

DRIVER CC – 700mA



Collegamento in Serie
Series Wiring



E.TRA.621.700
1 Driver for 1-8 Lamps

Alimentatore ON/OFF 20W 700mA IP20
Driver ON/OFF 20W 700mA IP20
L 111 x W 52 x H 22



E.TRA.623.700
1 Driver for 1-14 Lamps

Alimentatore ON/OFF 36W 700mA IP20
Driver ON/OFF 36W 700mA IP20
L 163 x W 30 x H 21



E.TRA.634.700
1 Driver for 1-20 Lamps

Alimentatore ON/OFF 60W 700mA IP20
Driver ON/OFF 60W 700mA IP20
L 124 x W 80 x H 22



E.TRA.635.700
1 Driver for 1-20 Lamps

Alimentatore DALI2 60W 700mA IP20
Driver DALI2 60W 700mA IP20
L 124 x W 80 x H 22



E.TRA.636.700
1 Driver for 1-20 Lamps

Alimentatore CASAMBI 60W 700mA IP20
Driver CASAMBI 60W 700mA IP20
L 124 x W 80 x H 22



E.TRA.658.700
1 Driver for 1-12 Lamps

Alimentatore ON/OFF 23W 700mA IP67
Driver ON/OFF 23W 700mA IP67
L 124 x W 47 x H 26



E.TRA.659.700
1 Driver for 1-12 Lamps

Alimentatore DALI2 23W 700mA IP67
Driver DALI2 23W 700mA IP67
L 124 x W 47 x H 26

HUB – SISTEMI DI CONNESSIONE SEMPLIFICATA CC 700mA

HUB – READY TO CONNECT SYSTEM CC 700mA



HUB.700.001.CA
1 Hub for 1-8 Lamps

Hub 700mA IP66 CASAMBI con driver 60W IP20
Hub 700mA IP66 CASAMBI with driver 60W IP20
L 235 x W 200 x H 92




HUB.700.001.DA2
1 Hub for 1-8 Lamps


Hub 700mA IP66 DALI-2 con driver 60W IP20
Hub 700mA IP66 DALI-2 with driver 60W IP20
L 235 x W 200 x H 92



HUB.700.001.ND
1 Hub for 1-8 Lamps

Hub 700mA IP66 ON/OFF con driver 60W IP20
Hub 700mA IP66 ON/OFF with driver 60W IP20
L 235 x W 200 x H 92

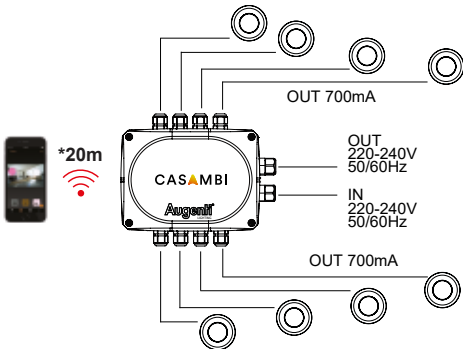

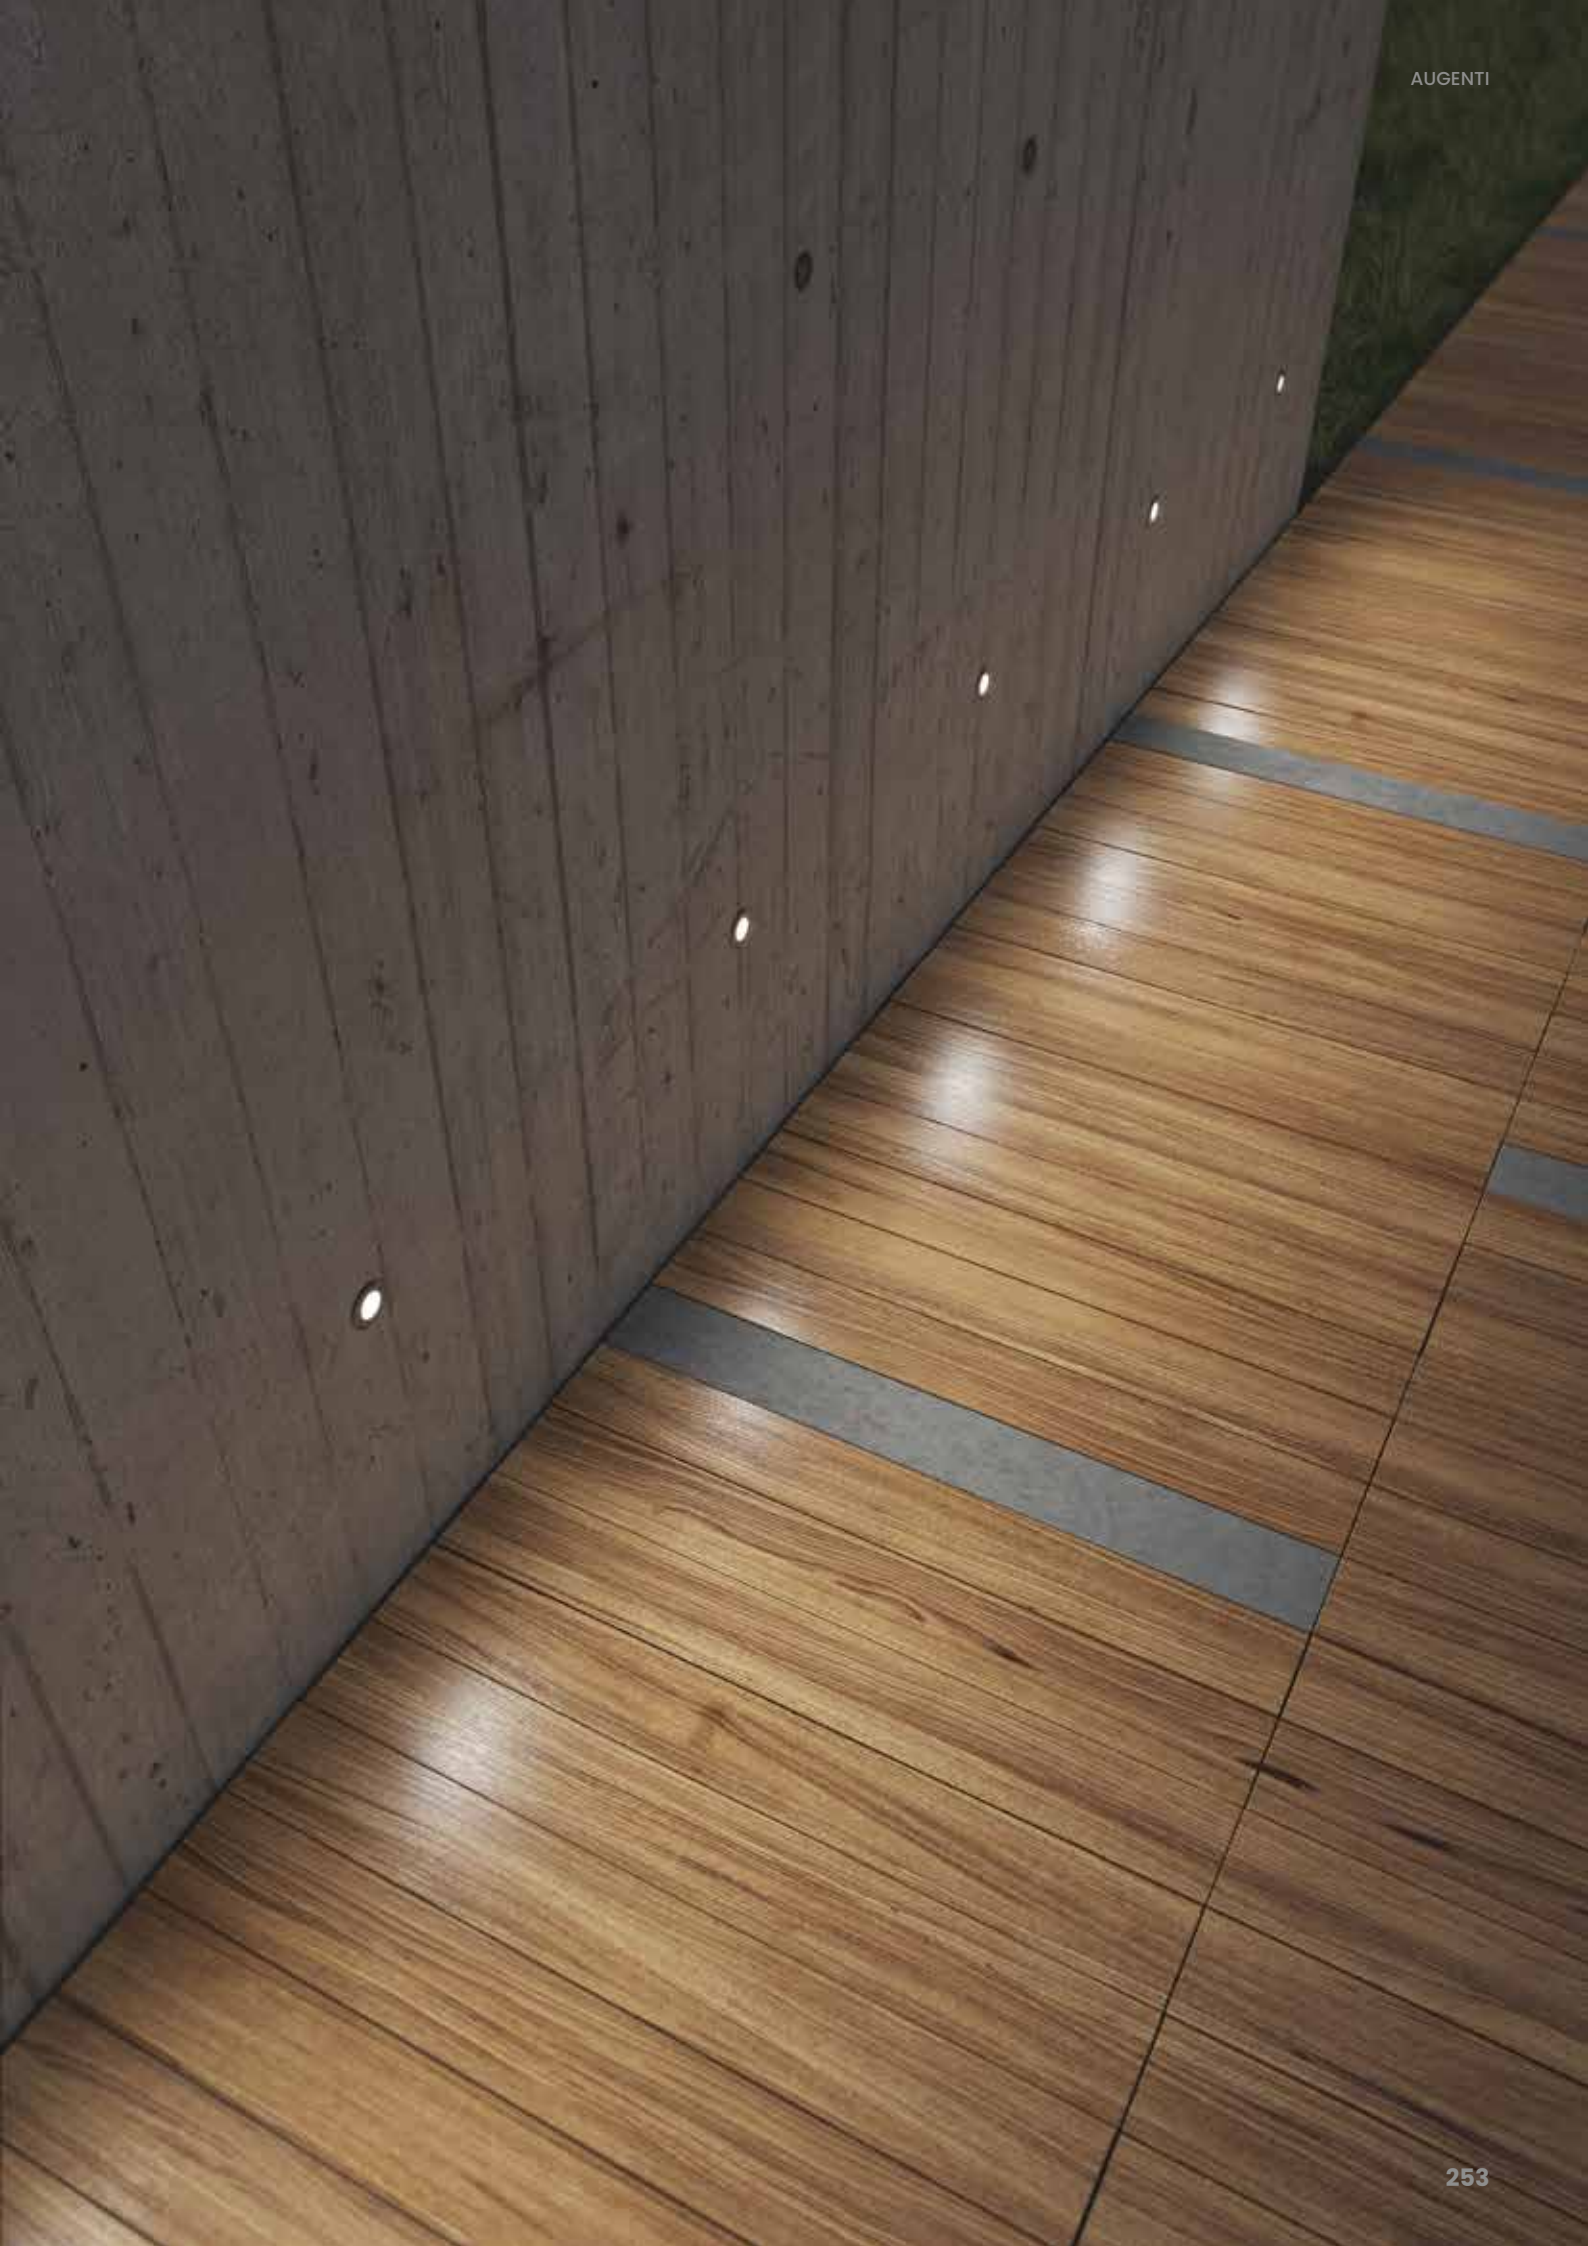



RIM 70

Incassato con ghiera in acciaio Ø70
Recessed with steel ring nut Ø70

DESCRIZIONE DESCRIPTION

Rim, l'ultimo nato tra gli incassati Augenti, è un piccolo ma performante apparecchio da incasso con anello in acciaio. Le dimensioni ridotte e l'installazione semplice e veloce ne permettono la collocazione in ambienti esterni o interni. Rim può infatti essere installato a pavimento, parete o soffitto, integrandosi in modo discreto nell'ambiente, lasciando che la luce e l'atmosfera generate siano gli elementi principali della scena. I fasci proposti sono ideali per effetti morbidi o d'accento, per installazioni singole o in serie. L'anello in acciaio inox 316L ed il sistema AcquaStop per la protezione anti-condensa, rendono Rim un prodotto sicuro e poliedrico, ideale per dare luce alla vostra fantasia.

Rim, the latest of the Augenti recessed models, is a small but powerful recessed appliance with steel ring. The small size and quick and easy installation allow it to be placed in outdoor or indoor environments. Rim can be installed on the floor, wall or ceiling, integrating discreetly into the environment, leaving the light and atmosphere generated to be the main elements of the scene. The proposed beams are ideal for soft or accent effects, for single installations or in series. The 316L stainless steel ring and the AcquaStop system for anti-condensation protection, make Rim a safe and versatile product, ideal to give light to your imagination.

INSTALLAZIONE INSTALLATION

Incasso a terra, parete o soffitto

Ground, wall or ceiling recessed

CORPO BODY

Alluminio da tornitura Serie 6000 anticorrosione, per maggiore resistenza alla corrosione

Anticorrosion turning aluminum 6000 Series, for greater corrosion resistance

BOX BOX

Polipropilene (PP) 30% fibra stabilizzata UV GWT750

Polypropylene (PP) 30% fiber UV stabilized GWT750

SCHERMO SCREEN

Vetro extrachiaro temprato 6 mm

Extra clear tempered glass 6 mm

GUARNIZIONI SEALS

EPDM

EPDM

CORNICE FRAME

Acciaio AISI316L

Stainless steel AISI316L

VERNICIATURA FINISHING

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder







**CONFIG.
CODICE**
CODE
CONFIG.


▲ → **H=2700K**
W=3000K
N=4000K

**VERSIONE IN
TENSIONE**
CONSTANT
VOLTAGE

6W CON DRIVER REMOTO 24Vdc
6W REMOTE DRIVER 24Vdc

**VERSIONE IN
CORRENTE**
CONSTANT
CURRENT

6W CON DRIVER REMOTO MAX 500mA DC
6W REMOTE DRIVER MAX 500mA DC

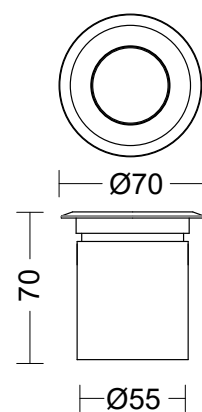

IP 67

IK 08



**HUB
SYSTEM**

RIM 70

INCASSO CON GHIERA IN ACCIAIO Ø70

24VDC

RECESSED WITH STEEL RING NUT Ø70

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3070R/▲RRCNB99	 STRETTO/10° NARROW/10°	6W	690 lm	520 lm	24Vdc	III	67	08	80
3070R/▲RRCMB99	 MEDIO/24° MEDIUM/24°	6W	690 lm	510 lm	24Vdc	III	67	08	80
3070R/▲RRCWB99	 LARGO/36° WIDE/36°	6W	690 lm	505 lm	24Vdc	III	67	08	80
3070R/▲RRCSW99	 MOLTO LARGO/60° SUPER WIDE/60°	6W	690 lm	508 lm	24Vdc	III	67	08	80
3070R/▲RRCOB99	 OVALE/15°X55° OVAL/15°X55°	6W	690 lm	554 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

ON/OFF

INCASSO CON GHIERA IN ACCIAIO VETRO OPALE Ø70

24VDC

RECESSED WITH STEEL RING NUT OPAL GLASS Ø70

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3070R/▲RRCVS99	 DIFFUSO/120° DIFFUSED/120°	6W	690 lm	70 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

ON/OFF

ACCESSORI

ACCESSORIES

A.BOX.019.01	CASSAFORMA INTERRATA IN POLICARBONATO PER RIM/CUT 70 INGROUND POLICARBONATE FORMWORK FOR RIM/CUT 70	E.TRA.632 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20
D.BOX.033.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 70 SHORT ALUMINUM FORMWORK FOR RIM/CUT 70	E.TRA.577 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.579 1 DRIVER FOR 4-12 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-2 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF

INCASSO CON GHIERA IN ACCIAIO Ø70**MAX 500MA***RECESSED WITH STEEL RING NUT Ø70***MAX 500MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3070R/▲RCCNB99	STRETTO/10° NARROW/10°	6W	690 lm	520 lm	max 500mA	III	67	08	80
3070R/▲RCCMB99	MEDIO/24° MEDIUM/24°	6W	690 lm	510 lm	max 500mA	III	67	08	80
3070R/▲RCCWB99	LARGO/36° WIDE/36°	6W	690 lm	505 lm	max 500mA	III	67	08	80
3070R/▲RCCSW99	MOLTO LARGO/60° SUPER WIDE/60°	6W	690 lm	508 lm	max 500mA	III	67	08	80
3070R/▲RCCOB99	OVALE/15°X55° OVAL/15°X55°	6W	690 lm	554 lm	max 500mA	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

INCASSO CON GHIERA IN ACCIAIO VETRO OPALE Ø70**MAX 500MA***RECESSED WITH STEEL RING NUT OPAL GLASS Ø70***MAX 500MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3070R/▲RCCVS99	DIFFUSO/120° DIFFUSED/120°	6W	690 lm	70 lm	max 500mA	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

ACCESSORI*ACCESSORIES*

A.BOX.019.01	CASSAFORMA INTERRATA IN POLICARBONATO PER RIM/CUT 70 INGROUND POLICARBONATE FORMWORK FOR RIM/CUT 70	E.TRA.636.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE CASAMBI 60W 500MA IP20 DRIVER CASAMBI 60W 500MA IP20
D.BOX.033.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 70 SHORT ALUMINUM FORMWORK FOR RIM/CUT 70	E.TRA.658.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 23W 500MA IP67 DRIVER ON/OFF 23W 500MA IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.659.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE DALI2 23W 500MA IP67 DRIVER DALI2 23W 500MA IP67
E.TRA.621.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 20W 500MA IP20 DRIVER ON/OFF 20W 500MA IP20	HUB.500.001.ND 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 ON/OFF CON DRIVER 60W IP20 HUB 500MA IP66 ON/OFF WITH DRIVER 60W IP20
E.TRA.623.500 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 36W 500MA IP20 DRIVER ON/OFF 36W 500MA IP20	HUB.500.001.DA2 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 DALI-2 CON DRIVER 60W IP20 HUB 500MA IP66 DALI-2 WITH DRIVER 60W IP20
E.TRA.634.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 60W 500MA IP20 DRIVER ON/OFF 60W 500MA IP20	HUB.500.001.CA 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 CASAMBI CON DRIVER 60W IP20 HUB 500MA IP66 CASAMBI WITH DRIVER 60W IP20
E.TRA.635.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE DALI2 60W 500MA IP20 DRIVER DALI2 60W 500MA IP20		

RIM 70 PAINTED

INCASSO CON GHIERA IN ACCIAIO VERNICIATO Ø70

24VDC

RECESSED WITH PAINTED STEEL RING NUT Ø70

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3070R/▲RRCNB	 STRETTO/10° NARROW/10°	6W	690 lm	520 lm	24Vdc	III	67	08	80
3070R/▲RRCMB	 MEDIO/24° MEDIUM/24°	6W	690 lm	510 lm	24Vdc	III	67	08	80
3070R/▲RRCWB	 LARGO/36° WIDE/36°	6W	690 lm	505 lm	24Vdc	III	67	08	80
3070R/▲RRCSW	 MOLTO LARGO/60° SUPER WIDE/60°	6W	690 lm	508 lm	24Vdc	III	67	08	80
3070R/▲RRCOB	 OVALE/15°X55° OVAL/15°X55°	6W	690 lm	554 lm	24Vdc	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

ON/OFF

INCASSO CON GHIERA IN ACCIAIO VERNICIATO VETRO OPALE Ø70

24VDC

RECESSED WITH PAINTED STEEL RING NUT OPAL GLASS Ø70

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3070R/▲RRCVS	 DIFFUSO/120° DIFFUSED/120°	6W	690 lm	70 lm	24Vdc	III	67	08	80


VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

ON/OFF

ACCESSORI

ACCESSORIES


A.BOX.019.01	CASSAFORMA INTERRATA IN POLICARBONATO PER RIM/CUT 70 INGROUND POLICARBONATE FORMWORK FOR RIM/CUT 70	E.TRA.632 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20
D.BOX.033.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 70 SHORT ALUMINUM FORMWORK FOR RIM/CUT 70	E.TRA.577 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.579 1 DRIVER FOR 4-12 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-2 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF

INCASSO CON GHIERA IN ACCIAIO VERNICIATO Ø70**MAX 500MA***RECESSED WITH PAINTED STEEL RING NUT Ø70***MAX 500MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3070R/▲RCCNB	STRETTO/10° NARROW/10°	6W	690 lm	520 lm	max 500mA	III	67	08	80
3070R/▲RCCMB	MEDIO/24° MEDIUM/24°	6W	690 lm	510 lm	max 500mA	III	67	08	80
3070R/▲RCCWB	LARGO/36° WIDE/36°	6W	690 lm	505 lm	max 500mA	III	67	08	80
3070R/▲RCCSW	MOLTO LARGO/60° SUPER WIDE/60°	6W	690 lm	508 lm	max 500mA	III	67	08	80
3070R/▲RCCOB	OVALE/15°X55° OVAL/15°X55°	6W	690 lm	554 lm	max 500mA	III	67	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 8 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

INCASSO CON GHIERA IN ACCIAIO VERNICIATO VETRO OPALE Ø70**MAX 500MA***RECESSED WITH PAINTED STEEL RING NUT OPAL GLASS Ø70***MAX 500MA**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
3070R/▲RCCVS	DIFFUSO/120° DIFFUSED/120°	6W	690 lm	70 lm	max 500mA	III	67	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

ACCESSORI*ACCESSORIES*

A.BOX.019.01	CASSAFORMA INTERRATA IN POLICARBONATO PER RIM/CUT 70 INGROUND POLICARBONATE FORMWORK FOR RIM/CUT 70	E.TRA.636.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE CASAMBI 60W 500MA IP20 DRIVER CASAMBI 60W 500MA IP20
D.BOX.033.01	CASSAFORMA CORTA IN ALLUMINIO PER RIM/CUT 70 SHORT ALUMINUM FORMWORK FOR RIM/CUT 70	E.TRA.658.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 23W 500MA IP67 DRIVER ON/OFF 23W 500MA IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.659.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE DALI2 23W 500MA IP67 DRIVER DALI2 23W 500MA IP67
E.TRA.621.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 20W 500MA IP20 DRIVER ON/OFF 20W 500MA IP20	HUB.500.001.ND 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 ON/OFF CON DRIVER 60W IP20 HUB 500MA IP66 ON/OFF WITH DRIVER 60W IP20
E.TRA.623.500 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 36W 500MA IP20 DRIVER ON/OFF 36W 500MA IP20	HUB.500.001.DA2 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 DALI-2 CON DRIVER 60W IP20 HUB 500MA IP66 DALI-2 WITH DRIVER 60W IP20
E.TRA.634.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 60W 500MA IP20 DRIVER ON/OFF 60W 500MA IP20	HUB.500.001.CA 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 CASAMBI CON DRIVER 60W IP20 HUB 500MA IP66 CASAMBI WITH DRIVER 60W IP20
E.TRA.635.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE DALI2 60W 500MA IP20 DRIVER DALI2 60W 500MA IP20		

ACCESSORI

ACCESSORIES

BOX DA INCASSO

RECESSED BOXES


A.BOX.019.01

Cassaforma interrata in policarbonato per Rim/Cut 70
Inground polycarbonate formwork for Rim/Cut 70
 H 110 x Ø 135


D.BOX.033.01

Cassaforma corta in alluminio per Rim/Cut 70
Short aluminum formwork for Rim/Cut 70
 H 100 x Ø 60

CONNETTORI

CONNECTORS


MOR682P/2V

Connettore IP68 2Poli/2Vie 2 x 1 mm²
Connector IP68 2Poles/2Ways 2 x 1 mm²
 L 72 x Ø 22

ALIMENTATORI 24Vdc

DRIVER 24Vdc


E.TRA.577

1 Driver for 1-3 Lamps

Alimentatore ON/OFF 25W 24Vdc IP67
Driver ON/OFF 25W 24Vdc IP67
 L 148 x W 40 x H 32


E.TRA.579

1 Driver for 4-12 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
 L 140 x W 63 x H 32


E.TRA.631


1 Driver for 1-2 Lamps

Alimentatore ON/OFF 15W 24Vdc IP20
Driver ON/OFF 15W 24Vdc IP20
 L 106 x W 33 x H 22


E.TRA.632

1 Driver for 1-8 Lamps

Alimentatore ON/OFF 70W 24Vdc IP20
Driver ON/OFF 70W 24Vdc IP20
 L 124 x W 80 x H 22

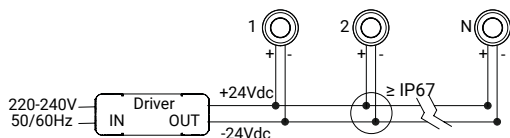

Collegamento in Parallelo
 Parallel Wiring


HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA 24Vdc

HUB - READY TO CONNECT SYSTEM 24Vdc


HUB.24V.001.ND


1 Hub for 1-8 Lamps

Hub 70W 24Vdc IP66 ON/OFF
Hub 70W 24Vdc IP66 ON/OFF
 L 235 x W 200 x H 92



ALIMENTATORI CC – 500mA

DRIVER CC – 500mA

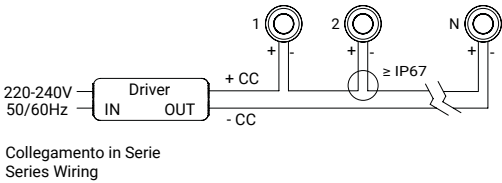

E.TRA.621.500
1 Driver for 1-3 Lamps

Alimentatore ON/OFF 20W 500mA IP20
Driver ON/OFF 20W 500mA IP20
L 111 x W 52 x H 22



E.TRA.623.500
1 Driver for 1-4 Lamps

Alimentatore ON/OFF 36W 500mA IP20
Driver ON/OFF 36W 500mA IP20
L 163 x W 30 x H 21



E.TRA.634.500
1 Driver for 1-5 Lamps

Alimentatore ON/OFF 60W 500mA IP20
Driver ON/OFF 60W 500mA IP20
L 124 x W 80 x H 22



E.TRA.635.500
1 Driver for 1-5 Lamps

Alimentatore DALI2 60W 500mA IP20
Driver DALI2 60W 500mA IP20
L 124 x W 80 x H 22



E.TRA.636.500
1 Driver for 1-5 Lamps

Alimentatore CASAMBI 60W 500mA IP20
Driver CASAMBI 60W 500mA IP20
L 124 x W 80 x H 22



E.TRA.658.500
1 Driver for 1-3 Lamps

Alimentatore ON/OFF 23W 500mA IP67
Driver ON/OFF 23W 500mA IP67
L 124 x W 47 x H 26



E.TRA.659.500
1 Driver for 1-3 Lamps

Alimentatore DALI2 23W 500mA IP67
Driver DALI2 23W 500mA IP67
L 124 x W 47 x H 26

HUB – SISTEMI DI CONNESSIONE SEMPLIFICATA CC 500mA

HUB – READY TO CONNECT SYSTEM CC 500mA



HUB.500.001.CA
1 Hub for 1-5 Lamps

Hub 500mA IP66 CASAMBI con driver 60W IP20
Hub 500mA IP66 CASAMBI with driver 60W IP20
L 235 x W 200 x H 92




HUB.500.001.DA2
1 Hub for 1-5 Lamps

Hub 500mA IP66 DALI-2 con driver 60W IP20
Hub 500mA IP66 DALI-2 with driver 60W IP20
L 235 x W 200 x H 92



HUB.500.001.ND
1 Hub for 1-5 Lamps

Hub 500mA IP66 ON/OFF con driver 60W IP20
Hub 500mA IP66 ON/OFF with driver 60W IP20
L 235 x W 200 x H 92

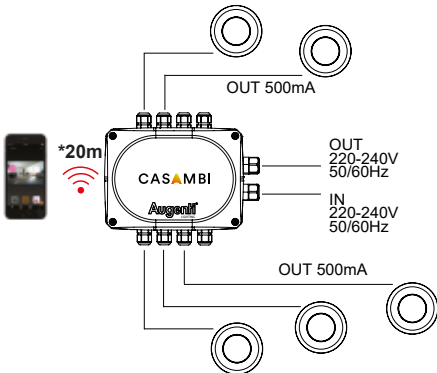





LUCY

Apparecchi da incasso - Alta resistenza a climi marittimi
Recessed lights - High resistance to maritime climates

DESCRIZIONE DESCRIPTION

Grazie alla cura nella selezione dei materiali e all'elevata protezione dalla corrosione, Lucy è la scelta ideale per installazioni in zone costiere o marine. L'anello esterno in acciaio garantisce durata e sostenibilità. Il corpo incassato in polycarbonato mantiene intatte le sue proprietà anche in presenza di temperature elevate e agenti atmosferici aggressivi. Disponibile nelle versioni incasso a muro, incasso a pavimento ed applique sia a muro che a soffitto, Lucy unisce versatilità e resistenza per un'illuminazione durevole e affidabile.

Due to the careful selection of materials and high corrosion protection, Lucy is the ideal choice for installations in coastal or marine areas. The outer steel ring guarantees durability and sustainability. The polycarbonate recessed body keeps its properties intact even in the presence of high temperatures and aggressive atmospheric agents. Available in recessed wall, floor and ceiling versions, Lucy combines versatility and resistance for durable and reliable lighting.

INSTALLAZIONE INSTALLATION

Incasso a parete

Wall recessed

BOX BOX

Polipropilene (PP) 30% fibra stabilizzata UV
GWT750

*Polypropylene (PP) 30% fiber UV stabilized
GWT750*

SCHERMO SCREEN

Vetro extrachiaro opale temprato 8 mm

Extra clear tempered opal glass 8 mm

GUARNIZIONI SEALS

EPDM

EPDM

CORNICE FRAME

Acciaio sabbiato AISI316L

Sandblasted steel AISI316L

VITERIA SCREWS

Acciaio inox A2

Stainless steel A2







**CONFIG.
CODICE**
CODE
CONFIG.

▲ → **H=2700K**
W=3000K
N=4000K

**VERSIONE IN
TENSIONE**
CONSTANT
VOLTAGE



3,5W CON DRIVER REMOTO 24Vdc
3,5W REMOTE DRIVER 24Vdc

**VERSIONE
220-240V**
220-240V
VERSION

ALIMENTAZIONE DIRETTA
DIRECT AC

Ø150

55




IP 66

IK 07



INCASSO IN POLIPROPILENE CON GHIERA IN ACCIAIO
24VDC
RECESSED IN POLYPROPYLENE WITH STEEL RING NUT
24VDC

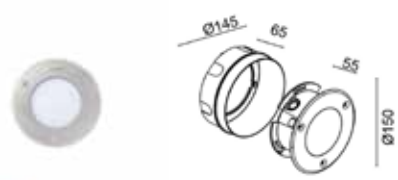

REVIEW

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
1060R/▲RRCVO99	 DIFFUSO/110° DIFFUSED/110°	3,5W	500 lm	180 lm	24Vdc	III	66	07	>80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

E.TRA.647 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE PER BOX 12W 24VDC IP65 - ON/OFF DRIVER FOR BOX 12W 24VDC IP65 - ON/OFF	E.TRA.579 1 DRIVER FOR 7-20 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	E.TRA.633 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE DALI 100W 24VDC IP67 DRIVER DALI 100W 24VDC IP67
E.TRA.577 1 DRIVER FOR 1-6 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67		

INCASSO IN POLIPROPILENE CON GHIERA IN ACCIAIO
LED DIRECT AC

RECESSED IN POLYPROPYLENE WITH STEEL RING NUT
LED DIRECT AC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
1060R/WRACVO99	 DIFFUSO/110° DIFFUSED/110°	5W	500 lm	180 lm	220-240Vac 50/60Hz	II	66	07	>80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM
DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

ACCESSORI
ACCESSORIES

E.TRA.581	LIMITATORE DI SOVRATENSIONE CL II - IP67 SURGE PROTECTOR CL II - IP67
-----------	--

ACCESSORI

ACCESSORIES

ALIMENTATORI 24Vdc

DRIVER 24Vdc

**E.TRA.577**

1 Driver for 1-6 Lamps

Alimentatore ON/OFF 25W 24Vdc IP67

Driver ON/OFF 25W 24Vdc IP67

L 148 x W 40 x H 32

**E.TRA.579**

1 Driver for 7-20 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67

Driver ON/OFF 100W 24Vdc IP67

L 140 x W 63 x H 32

**E.TRA.631**

1 Driver for 1-3 Lamps

Alimentatore ON/OFF 15W 24Vdc IP20

Driver ON/OFF 15W 24Vdc IP20

L 106 x W 33 x H 22

**E.TRA.633**

1 Driver for 1-20 Lamps

Alimentatore DALI 100W 24Vdc IP67

Driver DALI 100W 24Vdc IP67

L 175 x W 63 x H 36

**E.TRA.647**

1 Driver for 1-3 Lamps

Alimentatore per Box 12W 24Vdc IP65 - ON/OFF

Driver for Box 12W 24Vdc IP65 - ON/OFF

L 57 x W 40 x H 26

PROTEZIONE ALLE SOVRATENSIONI

SURGE PROTECTOR

**E.TRA.581**

Limitatore di sovratensione CL II - IP67

Surge protector CL II - IP67

L 37 x W 30 x H 30



CLIO

Apparecchi da incasso - Alta resistenza a climi marittimi
Recessed lights - High resistance to maritime climates

DESCRIZIONE DESCRIPTION

Grazie alla cura nella selezione dei materiali e all'elevata protezione dalla corrosione, Clio è la scelta ideale per installazioni in zone costiere o marine. L'anello esterno in acciaio garantisce durata e sostenibilità. Il corpo incassato in polycarbonato mantiene intatte le sue proprietà anche in presenza di temperature elevate e agenti atmosferici aggressivi. Disponibile nelle versioni incasso a muro, incasso a pavimento ed applique sia a muro che a soffitto, Lucy unisce versatilità e resistenza per un'illuminazione durevole e affidabile.

Due to the careful selection of materials and high corrosion protection, Clio is the ideal choice for installations in coastal or marine areas. The outer steel ring guarantees durability and sustainability. The polycarbonate recessed body keeps its properties intact even in the presence of high temperatures and aggressive atmospheric agents. Available in recessed wall, floor and ceiling versions, Lucy combines versatility and resistance for durable and reliable lighting.

INSTALLAZIONE INSTALLATION

Incasso a terra

Ground recessed

BOX BOX

Polipropilene (PP) 30% fibra stabilizzata UV
GWT750

*Polypropylene (PP) 30% fiber UV stabilized
GWT750*

SCHERMO SCREEN

Vetro extrachiaro temprato 8 mm

Extra clear tempered glass 8 mm

GUARNIZIONI SEALS

EPDM

EPDM

CORNICE FRAME

Acciaio sabbiato AISI316L

Sandblasted steel AISI316L

VITERIA SCREWS

Acciaio inox A2

Stainless steel A2







**CONFIG.
CODICE**
CODE
CONFIG.

▲ → **H=2700K**
W=3000K
N=4000K

**VERSIONE IN
TENSIONE**
CONSTANT
VOLTAGE



3,5W CON DRIVER REMOTO 24Vdc
3,5W REMOTE DRIVER 24Vdc

**VERSIONE
220-240V**
220-240V
VERSION

ALIMENTAZIONE DIRETTA
DIRECT AC

Ø150

55




IP 66

IK 07



INCASSO IN POLIPROPILENE CON GHIERA IN ACCIAIO
24VDC
RECESSED IN POLYPROPYLENE WITH STEEL RING NUT
24VDC



REVIEW

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
1080R/▲RRCVO99	 DIFFUSO/110° DIFFUSED/110°	3,5W	500 lm	180 lm	24Vdc	III	66	07	>80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM

DIMMERABILE - DIMMABLE


ACCESSORI

ACCESSORIES

E.TRA.647 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE PER BOX 12W 24VDC IP65 - ON/OFF DRIVER FOR BOX 12W 24VDC IP65 - ON/OFF	E.TRA.579 1 DRIVER FOR 7-20 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	E.TRA.633 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE DALI 100W 24VDC IP67 DRIVER DALI 100W 24VDC IP67
E.TRA.577 1 DRIVER FOR 1-6 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67		

INCASSO IN POLIPROPILENE CON GHIERA IN ACCIAIO
LED DIRECT AC

RECESSED IN POLYPROPYLENE WITH STEEL RING NUT
LED DIRECT AC

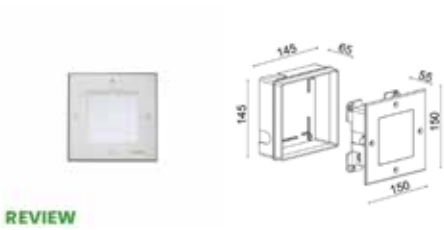

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
1080R/WRACVO99	 DIFFUSO/110° DIFFUSED/110°	5W	500 lm	180 lm	220-240Vac 50/60Hz	II	66	07	>80

VETRO EXTRACHIARO OPALE TEMPRATO 8 MM - EXTRA CLEAR OPAL TEMPERED GLASS 8 MM
DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

ACCESSORI
ACCESSORIES

E.TRA.581	LIMITATORE DI SOVRATENSIONE CL II - IP67 SURGE PROTECTOR CL II - IP67
-----------	--

ACCESSORI

ACCESSORIES

ALIMENTATORI 24Vdc

DRIVER 24Vdc

**E.TRA.577**

1 Driver for 1-6 Lamps

Alimentatore ON/OFF 25W 24Vdc IP67

Driver ON/OFF 25W 24Vdc IP67

L 148 x W 40 x H 32

**E.TRA.579**

1 Driver for 7-20 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67

Driver ON/OFF 100W 24Vdc IP67

L 140 x W 63 x H 32

**E.TRA.631**

1 Driver for 1-3 Lamps

Alimentatore ON/OFF 15W 24Vdc IP20

Driver ON/OFF 15W 24Vdc IP20

L 106 x W 33 x H 22

**E.TRA.633**

1 Driver for 1-20 Lamps

Alimentatore DALI 100W 24Vdc IP67

Driver DALI 100W 24Vdc IP67

L 175 x W 63 x H 36

**E.TRA.647**

1 Driver for 1-3 Lamps

Alimentatore per Box 12W 24Vdc IP65 - ON/OFF

Driver for Box 12W 24Vdc IP65 - ON/OFF

L 57 x W 40 x H 26

PROTEZIONE ALLE SOVRATENSIONI

SURGE PROTECTOR

**E.TRA.581**

Limitatore di sovratensione CL II - IP67

Surge protector CL II - IP67

L 37 x W 30 x H 30



OMEGA

Incasso a parete in acciaio o alluminio
Wall recessed in steel or aluminum

DESCRIZIONE DESCRIPTION

Omega è un prodotto realizzato con materiali di elevata qualità che ne garantiscono un'ottima resa in ambienti esterni. La sua capacità di adattarsi a diverse esigenze progettuali è potenziata dalla possibilità di installazione sia a parete che a soffitto. Omega è inoltre disponibile con quattro diverse cornici, ognuna pensata per offrire uno stile unico e una personalizzazione ancora più accurata. Che si tratti di un ambiente moderno, classico, industriale o minimal, ogni cornice permette di integrare il prodotto in modo armonioso e coerente con l'identità dello spazio.

Omega is a product made with high quality materials that guarantee an excellent performance in outdoor environments. Its ability to adapt to different design needs is enhanced by the possibility of wall and ceiling installation. Omega is also available with four different frames, each designed to offer a unique style and even more accurate customization. Whether it is a modern, classic, industrial or minimal environment, each frame allows to integrate the product in a harmonious way and consistent with the identity of the space.

INSTALLAZIONE INSTALLATION

Incasso a parete

Wall recessed

CORPO BODY

Alluminio pressofuso

Die-cast aluminium

BOX BOX

Polipropilene (PP) 30% fibra stabilizzata UV

Polypropylene (PP) 30% UV stabilized fiber

SCHERMO SCREEN

Vetro stampato opale 5 mm

Opal printed glass 5 mm

GUARNIZIONI SEALS

EPDM

EPDM

VITERIA SCREWS

Acciaio inox A2

Stainless steel A2

VERNICIATURA FINISHING

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder







**CONFIG.
CODICE**
CODE
CONFIG.

▲ → **H=2700K**
W=3000K
N=4000K

**VERSIONE IN
TENSIONE**
CONSTANT
VOLTAGE


3,5W CON DRIVER REMOTO 24Vdc
3,5W REMOTE DRIVER 24Vdc

**VERSIONE
220-240V**
220-240V
VERSION

ALIMENTAZIONE DIRETTA
DIRECT AC



— 65 —



— Ø125 —




— 70 —



— Ø125 —



— 84 —




— Ø125 —

IP 65

IK 05




INCASSO CON GHIERA IN ACCIAIO**24VDC***RECESSED WITH STEEL RING NUT***24VDC****REVIEW**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9110R/▲RRCVO	 DIFFUSO >100° DIFFUSED >100°	3,5W	500 lm	150 lm	24Vdc	III	65	05	>80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM

DIMMERABILE - DIMMABLE

INCASSO CON GHIERA IN ACCIAIO VERNICIATO**24VDC***RECESSED WITH PAINTED STEEL RING NUT***24VDC****REVIEW**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9111R/▲RRCVO	 DIFFUSO >100° DIFFUSED >100°	3,5W	500 lm	150 lm	24Vdc	III	65	05	>80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM


DIMMERABILE - DIMMABLE

ACCESSORI*ACCESSORIES*

E.TRA.647 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE PER BOX 12W 24VDC IP65 - ON/OFF DRIVER FOR BOX 12W 24VDC IP65 - ON/OFF	E.TRA.579 1 DRIVER FOR 7-20 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	E.TRA.633 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE DALI 100W 24VDC IP67 DRIVER DALI 100W 24VDC IP67
E.TRA.577 1 DRIVER FOR 1-6 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67		

INCASSO CON GRIGLIA LINEARE IN ALLUMINIO
24VDC

RECESSED WITH LINEAR ALUMINUM GRID
24VDC

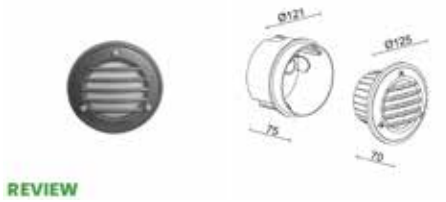


CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9120R/▲RRCVO	 DIFFUSO >100° DIFFUSED >100°	3,5W	500 lm	150 lm	24Vdc	III	65	05	>80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM
DIMMERABILE - DIMMABLE

INCASSO CON GHIERA A PALPEBRA IN ALLUMINIO
24VDC

RECESSED WITH EYELID ALUMINUM RING NUT
24VDC

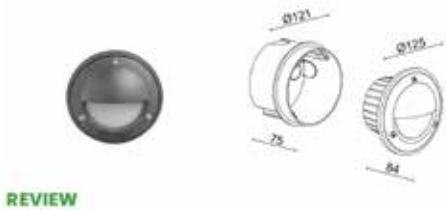

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9130R/▲RRCVO	 DIFFUSO >100° DIFFUSED >100°	3,5W	500 lm	150 lm	24Vdc	III	65	05	>80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM
DIMMERABILE - DIMMABLE

ACCESSORI
ACCESSORIES

E.TRA.647 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE PER BOX 12W 24VDC IP65 - ON/OFF DRIVER FOR BOX 12W 24VDC IP65 - ON/OFF	E.TRA.579 1 DRIVER FOR 7-20 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	E.TRA.633 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE DALI 100W 24VDC IP67 DRIVER DALI 100W 24VDC IP67
E.TRA.577 1 DRIVER FOR 1-6 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67		

INCASSO CON GHIERA IN ACCIAIO**LED DIRECT AC***RECESSED WITH STEEL RING NUT**LED DIRECT AC***REVIEW**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9110R/WTACVO	 DIFFUSO >100° DIFFUSED >100°	5W	500 lm	150 lm	220-240Vac 50/60Hz	I	65	05	>80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM

DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

INCASSO CON GHIERA IN ACCIAIO VERNICIATO**LED DIRECT AC***RECESSED WITH PAINTED STEEL RING NUT**LED DIRECT AC***REVIEW**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9111R/WTACVO	 DIFFUSO >100° DIFFUSED >100°	5W	500 lm	150 lm	220-240Vac 50/60Hz	I	65	05	>80


VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM

DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

ACCESSORI*ACCESSORIES*

E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
-----------	--

INCASSO CON GRIGLIA LINEARE IN ALLUMINIO
LED DIRECT AC
RECESSED WITH LINEAR ALUMINUM GRID
LED DIRECT AC

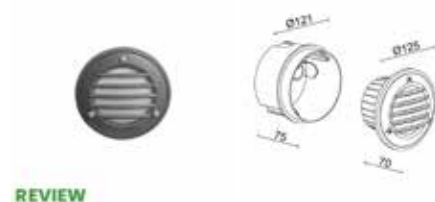


REVIEW

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9120R/WTACVO	 DIFFUSO >100° DIFFUSED >100°	5W	500 lm	150 lm	220-240Vac 50/60Hz	I	65	05	>80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM

DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

INCASSO CON GHIERA A PALPEBRA IN ALLUMINIO
LED DIRECT AC
RECESSED WITH EYELID ALUMINUM RING NUT
LED DIRECT AC

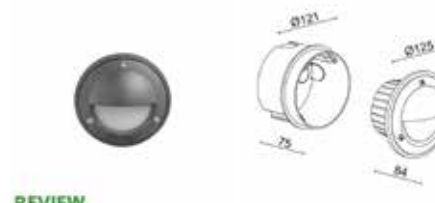

REVIEW

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9130R/WTACVO	 DIFFUSO >100° DIFFUSED >100°	5W	500 lm	150 lm	220-240Vac 50/60Hz	I	65	05	>80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM

DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

ACCESSORI
ACCESSORIES

E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
------------------	--

ACCESSORI

ACCESSORIES

ALIMENTATORI 24Vdc

DRIVER 24Vdc

**E.TRA.577**

1 Driver for 1-6 Lamps

Alimentatore ON/OFF 25W 24Vdc IP67

Driver ON/OFF 25W 24Vdc IP67

L 148 x W 40 x H 32

**E.TRA.579**

1 Driver for 7-20 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67

Driver ON/OFF 100W 24Vdc IP67

L 140 x W 63 x H 32

**E.TRA.631**

1 Driver for 1-3 Lamps

Alimentatore ON/OFF 15W 24Vdc IP20

Driver ON/OFF 15W 24Vdc IP20

L 106 x W 33 x H 22

**E.TRA.633**

1 Driver for 1-20 Lamps

Alimentatore DALI 100W 24Vdc IP67

Driver DALI 100W 24Vdc IP67

L 175 x W 63 x H 36

**E.TRA.647**

1 Driver for 1-3 Lamps

Alimentatore per Box 12W 24Vdc IP65 - ON/OFF

Driver for Box 12W 24Vdc IP65 - ON/OFF

L 57 x W 40 x H 26

PROTEZIONE ALLE SOVRATENSIONI

SURGE PROTECTOR

**E.TRA.580**

Limitatore di sovratensione CL I - IP67

Surge protector CL I - IP67

L 37 x W 30 x H 30



MICRON

Incasso a parete in acciaio o alluminio
Wall recessed in steel or aluminum

DESCRIZIONE DESCRIPTION

Micron è un prodotto realizzato con materiali di elevata qualità che ne garantiscono un'ottima resa in ambienti esterni. La sua capacità di adattarsi a diverse esigenze progettuali è potenziata dalla possibilità di installazione sia a parete che a soffitto. Omega è inoltre disponibile con quattro diverse cornici, ognuna pensata per offrire uno stile unico e una personalizzazione ancora più accurata. Che si tratti di un ambiente moderno, classico, industriale o minimal, ogni cornice permette di integrare il prodotto in modo armonioso e coerente con l'identità dello spazio.

Micron is a product made with high quality materials that guarantee an excellent performance in outdoor environments. Its ability to adapt to different design needs is enhanced by the possibility of wall and ceiling installation. Omega is also available with four different frames, each designed to offer a unique style and even more accurate customization. Whether it is a modern, classic, industrial or minimal environment, each frame allows to integrate the product in a harmonious way and consistent with the identity of the space.

INSTALLAZIONE INSTALLATION

Incasso a parete

Wall recessed

CORPO BODY

Alluminio pressofuso

Die-cast aluminium

BOX BOX

Polipropilene (PP) 30% fibra stabilizzata UV

Polypropylene (PP) 30% UV stabilized fiber

SCHERMO SCREEN

Vetro stampato opale 5 mm

Opal printed glass 5 mm

GUARNIZIONI SEALS

EPDM

EPDM

VITERIA SCREWS

Acciaio inox A2

Stainless steel A2

VERNICIATURA FINISHING

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder







**CONFIG.
CODICE**
CODE
CONFIG.

▲ → **H=2700K**
W=3000K
N=4000K

**VERSIONE IN
TENSIONE**
CONSTANT
VOLTAGE


3,5W CON DRIVER REMOTO 24Vdc
3,5W REMOTE DRIVER 24Vdc

**VERSIONE
220-240V**
220-240V
VERSION

ALIMENTAZIONE DIRETTA
DIRECT AC



— 65 —




125

— 125 —



— 70 —




125

— 125 —



— 84 —




125

— 125 —

IP 65

IK 05




INCASSO CON GHIERA IN ACCIAIO**24VDC***RECESSED WITH STEEL RING NUT***24VDC****REVIEW**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9210R/▲RRCVO	 DIFFUSO >100° DIFFUSED >100°	3,5W	500 lm	150 lm	24Vdc	III	65	05	>80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM

DIMMERABILE - DIMMABLE

INCASSO CON GHIERA IN ACCIAIO VERNICIATO**24VDC***RECESSED WITH PAINTED STEEL RING NUT***24VDC****REVIEW**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9211R/▲RRCVO	 DIFFUSO >100° DIFFUSED >100°	3,5W	500 lm	150 lm	24Vdc	III	65	05	>80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM


DIMMERABILE - DIMMABLE

ACCESSORI*ACCESSORIES*

E.TRA.647 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE PER BOX 12W 24VDC IP65 - ON/OFF DRIVER FOR BOX 12W 24VDC IP65 - ON/OFF	E.TRA.579 1 DRIVER FOR 7-20 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	E.TRA.633 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE DALI 100W 24VDC IP67 DRIVER DALI 100W 24VDC IP67
E.TRA.577 1 DRIVER FOR 1-6 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67		

INCASSO CON GRIGLIA LINEARE IN ALLUMINIO
24VDC

RECESSED WITH LINEAR ALUMINUM GRID
24VDC

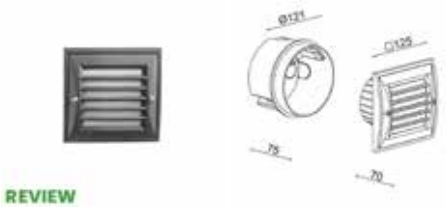


REVIEW

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9220R/▲RRCVO	 DIFFUSO >100° DIFFUSED >100°	3,5W	500 lm	150 lm	24Vdc	III	65	05	>80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM
DIMMERABILE - DIMMABLE

INCASSO CON GHIERA A PALPEBRA IN ALLUMINIO
24VDC

RECESSED WITH EYELID ALUMINUM RING NUT
24VDC

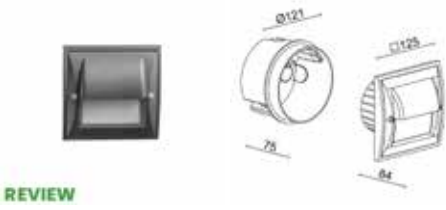

REVIEW

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9230R/▲RRCVO	 DIFFUSO >100° DIFFUSED >100°	3,5W	500 lm	150 lm	24Vdc	III	65	05	>80


VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM
DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

E.TRA.647 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE PER BOX 12W 24VDC IP65 - ON/OFF DRIVER FOR BOX 12W 24VDC IP65 - ON/OFF	E.TRA.579 1 DRIVER FOR 7-20 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	E.TRA.633 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE DALI 100W 24VDC IP67 DRIVER DALI 100W 24VDC IP67
E.TRA.577 1 DRIVER FOR 1-6 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67		

INCASSO CON GHIERA IN ACCIAIO
LED DIRECT AC
RECESSED WITH STEEL RING NUT
LED DIRECT AC

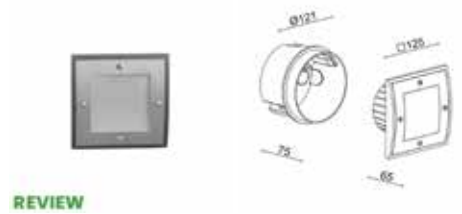


REVIEW

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9210R/WTACVO	 DIFFUSO >100° DIFFUSED >100°	5W	500 lm	150 lm	220-240Vac 50/60Hz	I	65	05	>80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM
 DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

INCASSO CON GHIERA IN ACCIAIO VERNICIATO
LED DIRECT AC
RECESSED WITH PAINTED STEEL RING NUT
LED DIRECT AC

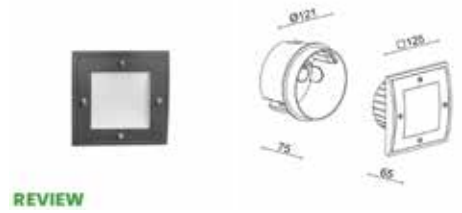

REVIEW


CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9211R/WTACVO	 DIFFUSO >100° DIFFUSED >100°	5W	500 lm	150 lm	220-240Vac 50/60Hz	I	65	05	>80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM
 DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

ACCESSORI
ACCESSORIES

E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
------------------	--

INCASSO CON GRIGLIA LINEARE IN ALLUMINIO
LED DIRECT AC
RECESSED WITH LINEAR ALUMINUM GRID
LED DIRECT AC

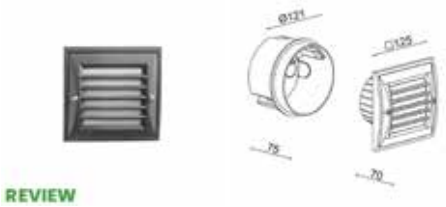


REVIEW

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9220R/WTACVO	 DIFFUSO >100° DIFFUSED >100°	5W	500 lm	150 lm	220-240Vac 50/60Hz	I	65	05	>80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM
DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

INCASSO CON GHIERA A PALPEBRA IN ALLUMINIO
LED DIRECT AC
RECESSED WITH EYELID ALUMINUM RING NUT
LED DIRECT AC

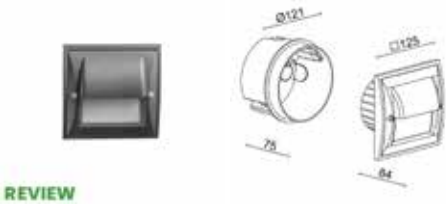

REVIEW

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9230R/WTACVO	 DIFFUSO >100° DIFFUSED >100°	5W	500 lm	150 lm	220-240Vac 50/60Hz	III	65	05	>80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM
DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

ACCESSORI
ACCESSORIES

E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
-----------	--

ACCESSORI

ACCESSORIES

ALIMENTATORI 24Vdc

DRIVER 24Vdc



E.TRA.577

1 Driver for 1-6 Lamps

Alimentatore ON/OFF 25W 24Vdc IP67

Driver ON/OFF 25W 24Vdc IP67

L 148 x W 40 x H 32



E.TRA.579

1 Driver for 7-20 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67

Driver ON/OFF 100W 24Vdc IP67

L 140 x W 63 x H 32



E.TRA.631

1 Driver for 1-3 Lamps

Alimentatore ON/OFF 15W 24Vdc IP20

Driver ON/OFF 15W 24Vdc IP20

L 106 x W 33 x H 22



E.TRA.633

1 Driver for 1-20 Lamps

Alimentatore DALI 100W 24Vdc IP67

Driver DALI 100W 24Vdc IP67

L 175 x W 63 x H 36



E.TRA.647

1 Driver for 1-3 Lamps

Alimentatore per Box 12W 24Vdc IP65 - ON/OFF

Driver for Box 12W 24Vdc IP65 - ON/OFF

L 57 x W 40 x H 26

PROTEZIONE ALLE SOVRATENSIONI

SURGE PROTECTOR



E.TRA.580

Limitatore di sovratensione CLI - IP67

Surge protector CLI - IP67

L 37 x W 30 x H 30



POCKET

Segnapasso per esterno
Outdoor step light

DESCRIZIONE DESCRIZIONE

La nuova linea di segnapasso per esterno, è stato concepito con un occhio attento alla cura del dettaglio. Riconosciamo che ogni spazio è unico, motivo per cui Pocket è disponibile in tre dimensioni diverse: sia che si tratti di illuminare un giardino, un vialetto o un percorso pedonale, la nostra gamma soddisfa tutte le esigenze. La sua forma compatta non compromette la sua efficacia. Oltre alla sua estetica accattivante, la nostra linea di segnapasso offre funzionalità avanzate per migliorare la vostra esperienza all'aperto. Può essere agevolmente fissato alla tradizionale scatola di derivazione elettrica o installato in superficie.

Pocket, the new outdoor step light line, has been conceived with an eye to detail. We recognize that each space is unique, which is why Pocket is available in three different sizes: whether it is lighting a garden, a driveway or a pedestrian path, our range meets all needs. Its compact shape does not compromise its effectiveness. In addition to its eye-catching aesthetic, our line of step light offers advanced features to enhance your outdoor experience. It can be easily fixed to the traditional electrical junction box or installed on the surface.

INSTALLAZIONE INSTALLATION

Incasso a parete

Wall recessed

CORPO BODY

Alluminio pressofuso

Die-cast aluminium

SCHERMO SCREEN

Vetro puntinato

Pointed glass

VITERIA SCREWS

Acciaio inox A2

Stainless steel A2

VERNICIATURA FINISHING

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder








**CONFIG.
CODICE**
CODE
CONFIG.

▲ → **H=2700K**
W=3000K
N=4000K

L → 90
160
230

**VERSIONE IN
TENSIONE**
CONSTANT
VOLTAGE

2W-6W CON DRIVER REMOTO 24Vdc
2W-6W REMOTE DRIVER 24Vdc

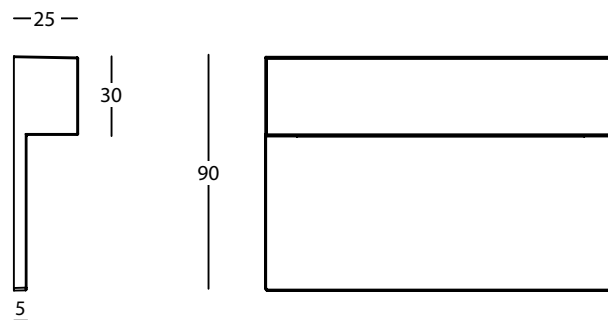

IP 65


IK 07



**HUB
SYSTEM**

SEGNAPASSO PICCOLO

STEP LIGHT SMALL



NEWS

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9200R/▲RRCVT	 DIFFUSO DIFFUSED	2W	280 lm	160 lm	24Vdc	III	65	07	80

VETRO PUNTINATO 4 MM - POINTED GLASS 4 MM

DIMMERABILE - DIMMABLE


ACCESSORI

ACCESSORIES

D.BOX.034.XX	BOX DA INCASSO STANDARD 502 STANDARD RECESSED BOX 502	E.TRA.579 1 DRIVER FOR 1-30 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
E.TRA.646	ALIMENTATORE PER BOX 4W 24VDC IP65 - ON/OFF DRIVER FOR BOX 4W 24VDC IP65 - ON/OFF	E.TRA.633 1 DRIVER FOR 1-30 LAMPS	ALIMENTATORE DALI 100W 24VDC IP67 DRIVER DALI 100W 24VDC IP67
E.TRA.631 1 DRIVER FOR 1-6 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF
E.TRA.632 1 DRIVER FOR 1-25 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20	HUB.24V.001.CA 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 CASAMBI HUB 70W 24VDC IP66 CASAMBI
E.TRA.577 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67	HUB.24V.001.DA2 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 DALI-2 HUB 70W 24VDC IP66 DALI-2

SEGNAPASSO MEDIO

STEP LIGHT MEDIUM

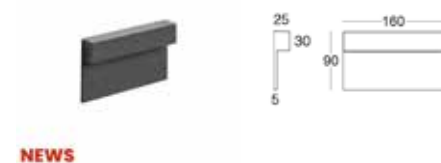

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9201R/▲RRCVT	 DIFFUSO DIFFUSED	4W	560 lm	310 lm	24Vdc	III	65	07	80

VETRO PUNTINATO 4 MM - POINTED GLASS 4 MM

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

D.BOX.035.XX	BOX DA INCASSO STANDARD 503 STANDARD RECESSED BOX 503	E.TRA.579 1 DRIVER FOR 1-15 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
D.BOX.036.XX	BOX DA INCASSO STANDARD 504 STANDARD RECESSED BOX 504	E.TRA.633 1 DRIVER FOR 1-15 LAMPS	ALIMENTATORE DALI 100W 24VDC IP67 DRIVER DALI 100W 24VDC IP67
E.TRA.647	ALIMENTATORE PER BOX 12W 24VDC IP65 - ON/OFF DRIVER FOR BOX 12W 24VDC IP65 - ON/OFF	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF
E.TRA.631 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.CA 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 CASAMBI HUB 70W 24VDC IP66 CASAMBI
E.TRA.632 1 DRIVER FOR 1-12 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20	HUB.24V.001.DA2 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 DALI-2 HUB 70W 24VDC IP66 DALI-2
E.TRA.577 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67		

SEGNAPASSO GRANDE

STEP LIGHT BIG



NEWS

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9202R/▲RRCVT	 DIFFUSO DIFFUSED	6W	840 lm	460 lm	24Vdc	III	65	07	80

VETRO PUNTINATO 4 MM - POINTED GLASS 4 MM

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

D.BOX.035.XX	BOX DA INCASSO STANDARD 503 STANDARD RECESSED BOX 503	E.TRA.579 1 DRIVER FOR 1-10 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
D.BOX.036.XX	BOX DA INCASSO STANDARD 504 STANDARD RECESSED BOX 504	E.TRA.633 1 DRIVER FOR 1-10 LAMPS	ALIMENTATORE DALI 100W 24VDC IP67 DRIVER DALI 100W 24VDC IP67
E.TRA.647	ALIMENTATORE PER BOX 12W 24VDC IP65 - ON/OFF DRIVER FOR BOX 12W 24VDC IP65 - ON/OFF	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF
E.TRA.631 1 DRIVER FOR 1-2 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.CA 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 CASAMBI HUB 70W 24VDC IP66 CASAMBI
E.TRA.632 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20	HUB.24V.001.DA2 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 DALI-2 HUB 70W 24VDC IP66 DALI-2
E.TRA.577 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67		

ACCESSORI

ACCESSORIES


BOX DA INCASSO

RECESSED BOXES

	D.BOX.034.XX	Box da incasso standard 502 <i>Standard recessed box 502</i> L 70 x W 50 x H 70
	D.BOX.035.XX	Box da incasso standard 503 <i>Standard recessed box 503</i> L 108 x W 53 x H 74
	D.BOX.036.XX	Box da incasso standard 504 <i>Standard recessed box 504</i> L 133 x W 53 x H 74

ALIMENTATORI 24Vdc

DRIVER 24Vdc

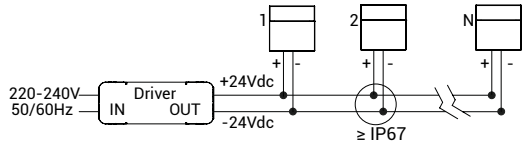

Collegamento in Parallelo
Parallel Wiring

	E.TRA.577 Cod. 9200R - 1 Driver for 1-8 Lamps Cod. 9201R - 1 Driver for 1-4 Lamps Cod. 9202R - 1 Driver for 1-3 Lamps	Alimentatore ON/OFF 25W 24Vdc IP67 <i>Driver ON/OFF 25W 24Vdc IP67</i> L 148 x W 40 x H 32
	E.TRA.579 Cod. 9200R - 1 Driver for 1-30 Lamps Cod. 9201R - 1 Driver for 1-15 Lamps Cod. 9202R - 1 Driver for 1-10 Lamps	Alimentatore ON/OFF 100W 24Vdc IP67 <i>Driver ON/OFF 100W 24Vdc IP67</i> L 140 x W 63 x H 32
	E.TRA.631 Cod. 9200R - 1 Driver for 1-6 Lamps Cod. 9201R - 1 Driver for 1-3 Lamps Cod. 9202R - 1 Driver for 1-2 Lamps	Alimentatore ON/OFF 15W 24Vdc IP20 <i>Driver ON/OFF 15W 24Vdc IP20</i> L 106 x W 33 x H 22
	E.TRA.632 Cod. 9200R - 1 Driver for 1-25 Lamps Cod. 9201R - 1 Driver for 1-12 Lamps Cod. 9202R - 1 Driver for 1-8 Lamps	Alimentatore ON/OFF 70W 24Vdc IP20 <i>Driver ON/OFF 70W 24Vdc IP20</i> L 124 x W 80 x H 22
	E.TRA.633 Cod. 9200R - 1 Driver for 1-30 Lamps Cod. 9201R - 1 Driver for 1-15 Lamps Cod. 9202R - 1 Driver for 1-10 Lamps	Alimentatore DALI 100W 24Vdc IP67 <i>Driver DALI 100W 24Vdc IP67</i> L 175 x W 63 x H 36
	E.TRA.646	Alimentatore per Box 4W 24Vdc IP65 - ON/OFF <i>Driver for Box 4W 24Vdc IP65 - ON/OFF</i> L 43 x W 29.5 x H 22
	E.TRA.647	Alimentatore per Box 12W 24Vdc IP65 - ON/OFF <i>Driver for Box 12W 24Vdc IP65 - ON/OFF</i> L 57 x W 40 x H 26

HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA 24Vdc

HUB - READY TO CONNECT SYSTEM 24Vdc



HUB.24V.001.ND

Cod. 9200R - 1 Hub for 1-8 Lamps
Cod. 9201R - 1 Hub for 1-8 Lamps
Cod. 9202R - 1 Hub for 1-8 Lamps

Hub 70W 24Vdc IP66 ON/OFF

Hub 70W 24Vdc IP66 ON/OFF

L 235 x W 200 x H 92



HUB.24V.001.DA2

Cod. 9200R - 1 Hub for 1-8 Lamps
Cod. 9201R - 1 Hub for 1-8 Lamps
Cod. 9202R - 1 Hub for 1-8 Lamps

Hub 70W 24Vdc IP66 DALI-2

Hub 70W 24Vdc IP66 DALI-2

L 235 x W 200 x H 92






HUB.24V.001.CA


Cod. 9200R - 1 Hub for 1-8 Lamps
Cod. 9201R - 1 Hub for 1-8 Lamps
Cod. 9202R - 1 Hub for 1-8 Lamps

Hub 70W 24Vdc IP66 CASAMBI

Hub 70W 24Vdc IP66 CASAMBI

L 235 x W 200 x H 92

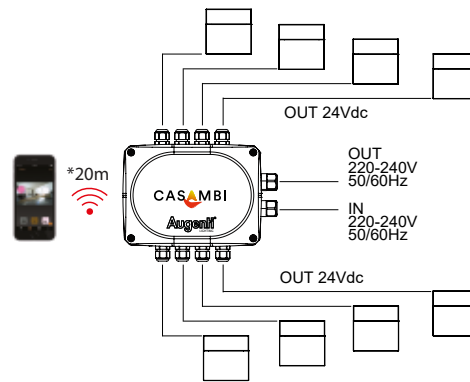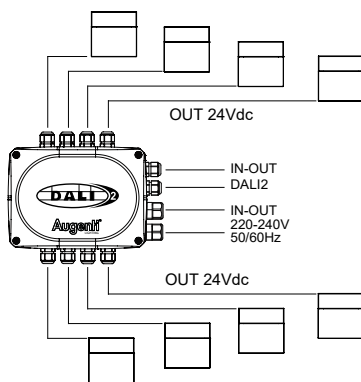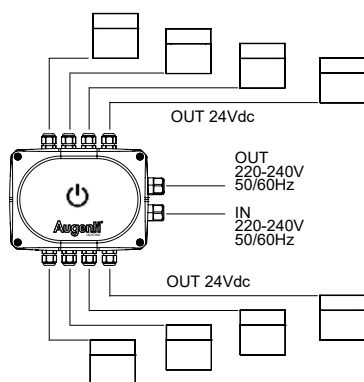



RECTA

Apparecchio da incasso a parete
Wall recessed luminaire

DESCRIZIONE *DESCRIZIONE*

Recta è un prodotto realizzato con materiali di alta qualità, progettato per offrire prestazioni eccellenti e una lunga durata in ambienti esterni. Pensato per installazioni a parete, garantisce una diffusione della luce uniforme e performante. Il design essenziale di Recta si arricchisce della possibilità di scegliere tra due diverse cornici, permettendo una personalizzazione estetica che si adatta perfettamente a stili architettonici differenti.

Recta is a product made with high quality materials, designed to offer excellent performance and long life in outdoor environments. Designed for wall installations, it guarantees a uniform and efficient light diffusion. The essential design of Recta is enriched by the possibility to choose between two different frames, allowing an aesthetic customization that fits perfectly to different architectural styles.

INSTALLAZIONE *INSTALLATION*

Incasso a parete

Wall recessed

CORPO *BODY*

Alluminio pressofuso

Die-cast aluminium

CORNICE *FRAME*

Alluminio pressofuso

Die-cast aluminium

BOX *BOX*

Polipropilene (PP) 30% fibra stabilizzata UV

Polypropylene (PP) 30% UV stabilized fiber

SCHERMO *SCREEN*

Vetro stampato opale 5 mm

Opal printed glass 5 mm

GUARNIZIONI *SEALS*

EPDM

EPDM

VITERIA *SCREWS*

Acciaio inox A2

Stainless steel A2


VERNICIATURA *FINISHING*

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder







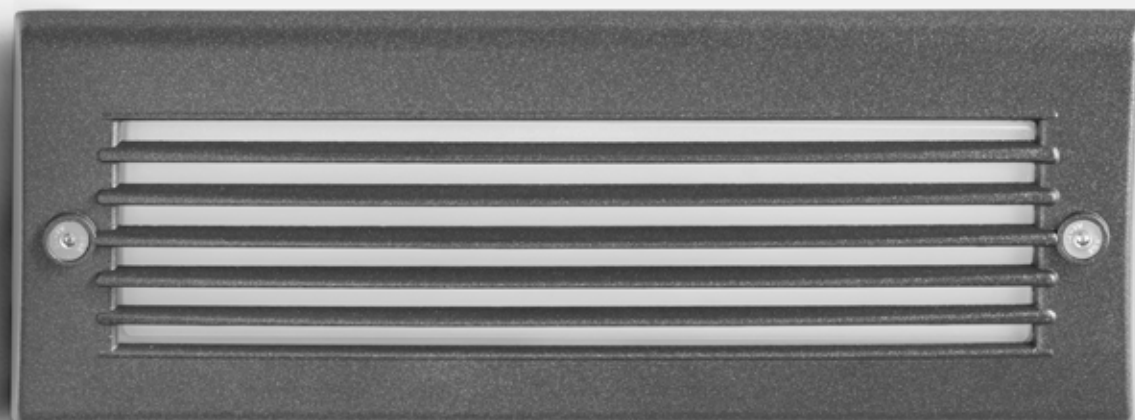


**CONFIG.
CODICE**
CODE
CONFIG.

▲ → **H=2700K**
W=3000K
N=4000K

ALIMENTAZIONE
INPUT SUPPLY

220-240VAC 50/60HZ
220-240VAC 50/60HZ

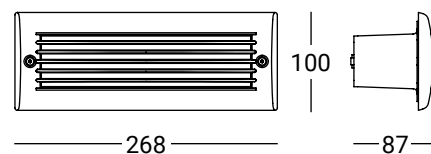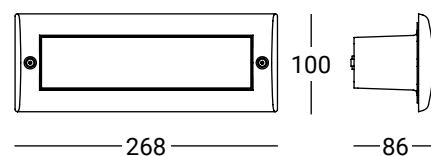


IP 65

IK 05

IK 08




INCASSO CON GHIERA LISCIA**DRIVER INCORPORATO***RECESSED WITH SMOOTH RING NUT**BUILT-IN DRIVER***REVIEW**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9550R/▲R20VO	 DIFFUSO >100° DIFFUSED >100°	12W	1440 lm	400 lm	220-240Vac 50/60Hz	I	65	05	80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM

ON/OFF

INCASSO CON GRIGLIA LINEARE**DRIVER INCORPORATO***RECESSED WITH LINEAR GRID**BUILT-IN DRIVER***REVIEW**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9450R/▲R20VO	 DIFFUSO >100° DIFFUSED >100°	12W	1440 lm	230 lm	220-240Vac 50/60Hz	I	65	08	80


VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM

ON/OFF

ACCESSORI*ACCESSORIES*

E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
------------------	--


INCASSO CON GHIERA LISCIA DALI
DRIVER INCORPORATO
RECESSED WITH SMOOTH RING NUT DALI
BUILT-IN DRIVER

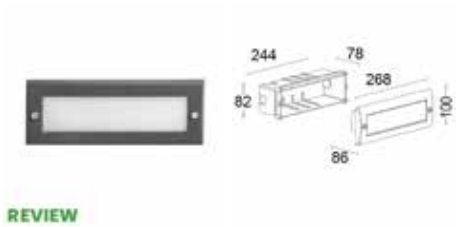

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9550R/▲D20VO	 DIFFUSO >100° DIFFUSED >100°	12W	1440 lm	400 lm	220-240Vac 50/60Hz	I	65	05	80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM
DALI-2 INTEGRATO - DALI-2 INTEGRATED

INCASSO CON GRIGLIA LINEARE DALI
DRIVER INCORPORATO
RECESSED WITH LINEAR GRID DALI
BUILT-IN DRIVER

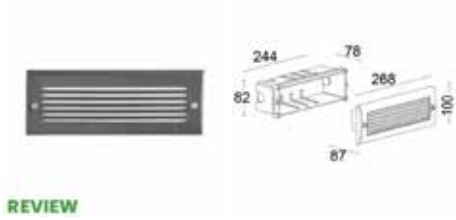


CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9450R/▲D20VO	 DIFFUSO >100° DIFFUSED >100°	12W	1440 lm	230 lm	220-240Vac 50/60Hz	I	65	08	80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM
DALI-2 INTEGRATO - DALI-2 INTEGRATED

ACCESSORI
ACCESSORIES


E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
-----------	--

INCASSO CON GHIERA LISCIA TRIAC**DRIVER INCORPORATO***RECESSED WITH SMOOTH RING NUT TRIAC**BUILT-IN DRIVER***REVIEW**

CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
9550R/▲T20VO	 DIFFUSO >100° <i>DIFFUSED >100°</i>	12W	1440 lm	400 lm	220-240Vac 50/60Hz	I	65	05	80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM

DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

INCASSO CON GRIGLIA LINEARE TRIAC**DRIVER INCORPORATO***RECESSED WITH LINEAR GRID TRIAC**BUILT-IN DRIVER***REVIEW**


CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
9450R/▲T20VO	 DIFFUSO >100° <i>DIFFUSED >100°</i>	12W	1440 lm	230 lm	220-240Vac 50/60Hz	I	65	08	80

VETRO STAMPATO OPALE 5 MM - OPAL PRINTED GLASS 5 MM

DIMMERABILE IN TAGLIO DI FASE - PHASE CUT DIMMABLE

ACCESSORI*ACCESSORIES*

E.TRA.639	CONTROLLER BLUETOOTH IP20 85-240VAC - CASAMBI BLUETOOTH CONTROLLER IP20 85-240VAC - CASAMBI	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
------------------	--	------------------	--



RECTA MAXI

Apparecchio da incasso a parete
Wall recessed luminaire

DESCRIZIONE *DESCRIZIONE*

Recta Maxi è un prodotto realizzato con materiali di alta qualità, progettato per offrire prestazioni eccellenti e una lunga durata in ambienti esterni. Pensato per installazioni a parete, garantisce una diffusione della luce uniforme e performante. Il design essenziale di Recta Maxi si arricchisce della possibilità di scegliere tra due diverse cornici, permettendo una personalizzazione estetica che si adatta perfettamente a stili architettonici differenti.

Recta Maxi is a product made with high quality materials, designed to offer excellent performance and long life in outdoor environments. Designed for wall installations, it guarantees a uniform and efficient light diffusion. The essential design of Recta Maxi is enriched by the possibility to choose between two different frames, allowing an aesthetic customization that fits perfectly to different architectural styles.

INSTALLAZIONE *INSTALLATION*

Incasso a parete

Wall recessed

CORPO *BODY*

Alluminio pressofuso

Die-cast aluminium

CORNICE *FRAME*

Alluminio pressofuso

Die-cast aluminium

BOX *BOX*

Polipropilene (PP) 30% fibra stabilizzata UV

Polypropylene (PP) 30% UV stabilized fiber

SCHERMO *SCREEN*

Vetro stampato opale 5 mm

Opal printed glass 5 mm

GUARNIZIONI *SEALS*

EPDM

EPDM

VITERIA *SCREWS*

Acciaio inox A2

Stainless steel A2

VERNICIATURA *FINISHING*

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder









**CONFIG.
CODICE**
CODE
CONFIG.

▲ → **H=2700K**
W=3000K
N=4000K

ALIMENTAZIONE
INPUT SUPPLY

220-240VAC 50/60HZ
220-240VAC 50/60HZ

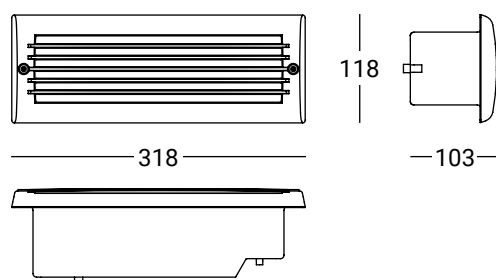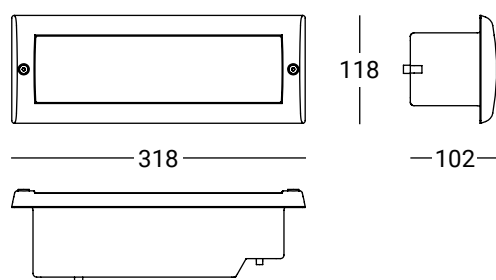


IP 65

IK 05

IK 08

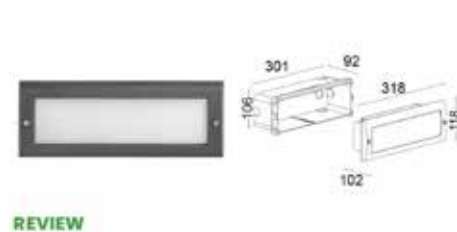


INCASSO CON GHIERA LISCIA**DRIVER INCORPORATO***RECESSED WITH SMOOTH RING NUT**BUILT-IN DRIVER***REVIEW**

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9500R/▲R35VO	DIFFUSO >100° DIFFUSED >100°	17W	1960 lm	600 lm	220-240Vac 50/60Hz	I	65	05	80

VETRO EXTRACHIARO OPALE TEMPRATO 5 MM - EXTRA CLEAR OPAL TEMPERED GLASS 5 MM

ON/OFF

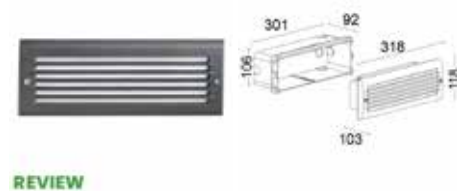INCASSO CON GRIGLIA LINEARE**DRIVER INCORPORATO***RECESSED WITH LINEAR GRID**BUILT-IN DRIVER***REVIEW**


CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
9400R/▲R35VO	DIFFUSO >100° DIFFUSED >100°	17W	1960 lm	350 lm	220-240Vac 50/60Hz	I	65	08	80

VETRO EXTRACHIARO OPALE TEMPRATO 5 MM - EXTRA CLEAR OPAL TEMPERED GLASS 5 MM

ON/OFF

ACCESSORI*ACCESSORIES*

E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
------------------	--



SQUARE

Apparecchio da incasso a parete
Wall recessed luminaire

DESCRIZIONE *DESCRIZIONE*

Square è un prodotto robusto e resistente, progettato per offrire soluzioni di illuminazione affidabili e durature in ambienti esterni, con particolare attenzione alle aree residenziali caratterizzate da giardini, vialetti e zone verdi. Meccanicamente studiato per garantire una diffusione della luce precisa e direzionata. Disponibile con finestra quadrata o rettangolare, e nella versione a paletto.

Square is a robust and durable product, designed to offer reliable and long-lasting lighting solutions in outdoor environments, with particular attention to residential areas characterized by gardens, alleys and green areas. Mechanically designed to ensure precise and directed light scattering. Available with square or rectangular window, and in the bollard version.

INSTALLAZIONE *INSTALLATION*

Incasso a parete

Wall recessed

CORPO *BODY*

Alluminio pressofuso

Die-cast aluminium

BOX *BOX*

Polipropilene (PP) 30% fibra stabilizzata UV

Polypropylene (PP) 30% UV stabilized fiber

SCHERMO *SCREEN*

Policarbonato trasparente

Transparent polycarbonate

GUARNIZIONI *SEALS*

EPDM

EPDM

VITERIA *SCREWS*

Acciaio inox A2

Stainless steel A2

VERNICIATURA *FINISHING*

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder








**CONFIG.
CODICE**
CODE
CONFIG.

▲ → **W=3000K**
N=4000K

ALIMENTAZIONE
INPUT SUPPLY

220-240VAC 50/60HZ
220-240VAC 50/60HZ

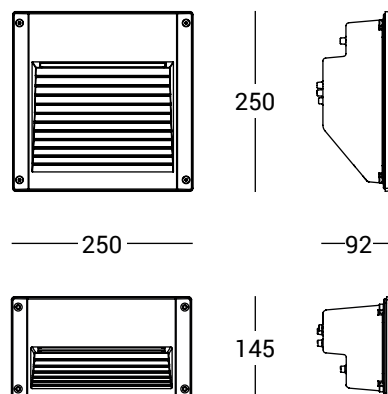

IP 65

IK 07



INCASSO A PARETE FINESTRA RETTANGOLARE DRIVER INCORPORATO

WALL RECESSED RECTANGULAR WINDOW
BUILT-IN DRIVER



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2950R/▲R3.PR	 ASIMMETRICO >100° ASYMMETRIC >100°	15W	1920 lm	510 lm	220-240Vac 50/60Hz	I	65	07	>80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE

ON/OFF

INCASSO A PARETE DALI FINESTRA RETTANGOLARE DRIVER INCORPORATO

WALL RECESSED DALI RECTANGULAR WINDOW
BUILT-IN DRIVER



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2950R/▲D3.PR	 ASIMMETRICO >100° ASYMMETRIC >100°	15W	1920 lm	510 lm	220-240Vac 50/60Hz	I	65	07	>80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE

DALI-2 INTEGRATO - DALI-2 INTEGRATED

ACCESSORI

ACCESSORIES

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
------------	---	-----------	--

INCASSO A PARETE FINESTRA QUADRATA
DRIVER INCORPORATO
WALL RECESSED SQUARE WINDOW
BUILT-IN DRIVER



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2900R/▲R3.PR	 ASIMMETRICO >100° ASYMMETRIC >100°	15W	1920 lm	510 lm	220-240Vac 50/60Hz	I	65	07	>80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE
 ON/OFF

INCASSO A PARETE DALI FINESTRA QUADRATA
DRIVER INCORPORATO
WALL RECESSED DALI SQUARE WINDOW
BUILT-IN DRIVER



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2900R/▲D3.PR	 ASIMMETRICO >100° ASYMMETRIC >100°	15W	1920 lm	510 lm	220-240Vac 50/60Hz	I	65	07	>80

POLICARBONATO TRASPARENTE - TRANSPARENT POLYCARBONATE
 DALI-2 INTEGRATO - DALI-2 INTEGRATED

ACCESSORI
ACCESSORIES

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
------------	---	-----------	--

