





BLOOM MINI

Proiettore orientabile mini
Mini adjustable floodlight

DESCRIZIONE DESCRIZIONE

La forma minimale ed il diametro di soli 35mm conferiscono alla serie Bloom Mini larga adattabilità ad ogni progetto. Le misure ridotte garantiscono totale flessibilità, permettendo l'integrazione di Bloom Mini in molteplici contesti. La sua versatilità può essere contestualizzata in giardini, per l'illuminazione di piante, siepi, aree fiorite o per valorizzare elementi architettonici, poiché la Luce è l'elemento fondamentale per una corretta percezione degli oggetti, degli spazi, delle emozioni.

The minimal shape and the diameter of only 35mm gives the Bloom Mini series wide adaptability to any project. The reduced sizes guarantee total flexibility, allowing the integration of Bloom Mini in multiple contexts. Its versatility can be contextualized in gardens, for the lighting of plants, hedges, flowered areas or to enhance architectural elements, since Light is the fundamental element for a correct perception of objects, spaces and emotions.

INSTALLAZIONE INSTALLATION

Installazione a terra, parete o soffitto

Ground, wall or ceiling installation

CORPO BODY

Alluminio da tornitura Serie 6000 anticorrosivo, per maggiore resistenza alla corrosione

Anticorrosive turning aluminum 6000 Series, for greater corrosion resistance

SCHERMO SCREEN

Vetro extrachiaro trasparente temperato

Extra clear transparent tempered glass

GUARNIZIONI SEALS

EPDM

EPDM

VITERIA SCREWS

Acciaio inox A2

Stainless steel A2

VERNICIATURA FINISHING

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder





FASCIO STRETTO 14°


NARROW BEAM 14°

5000W/NRRCNB

WATTAGGIO / WATTAGE **2W**

ALTEZZA INSTALLAZIONE / INSTALLATION HEIGHT **4M**

INTERASSE APPARECCHI / DISTANCE BETWEEN FIXTURES **4M**

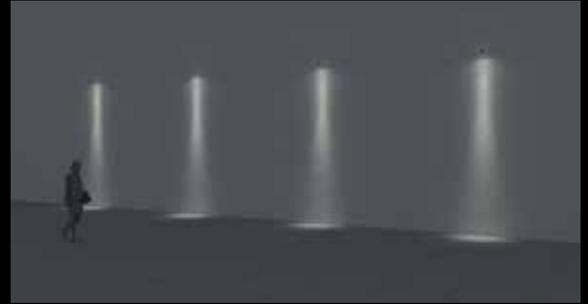

FASCIO MEDIO 30°

MEDIUM BEAM 30°

5000W/NRRCMB

WATTAGGIO / WATTAGE **2W**

ALTEZZA INSTALLAZIONE / INSTALLATION HEIGHT **4M**

INTERASSE APPARECCHI / DISTANCE BETWEEN FIXTURES **4M**



FASCIO LARGO 40°

WIDE BEAM 40°

5000W/NRRCWB

WATTAGGIO / WATTAGE **2W**

ALTEZZA INSTALLAZIONE / INSTALLATION HEIGHT **4M**

INTERASSE APPARECCHI / DISTANCE BETWEEN FIXTURES **4M**



CONFIG. CODICE
CONSTANT CONFIG.



▲ → **H=2700K**
W=3000K
N=4000K

VERSIONE IN TENSIONE
CONSTANT VOLTAGE


2W CON DRIVER REMOTO 24Vdc
2W REMOTE DRIVER 24Vdc

VERSIONE IN CORRENTE
CONSTANT CURRENT

2W CON DRIVER REMOTO MAX 700mA DC
2W REMOTE DRIVER MAX 700mA DC

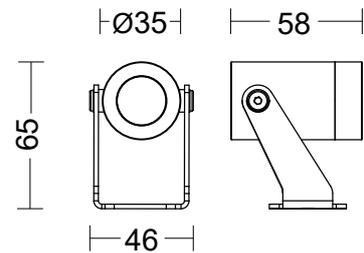

PROIETTORE ORIENTABILE
24VDC
ADJUSTABLE FLOODLIGHT
24VDC



CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
5000W/▲RRCNB	STRETTO/14° NARROW/14°	2W	270 lm	220 lm	24Vdc	III	66	08	80
5000W/▲RRCMB	MEDIO/30° MEDIUM/30°	2W	270 lm	210 lm	24Vdc	III	66	08	80
5000W/▲RRCWB	LARGO/40° WIDE/40°	2W	270 lm	210 lm	24Vdc	III	66	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS
 ON/OFF

ACCESSORI

ACCESSORIES


KIT.022	KIT PICCHETTO PER PROIETTORE FLOODLIGHT SPIKE KIT		E.TRA.577 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
KIT.027	CINGHIA PER PROIETTORE STRAP FOR FLOODLIGHT		E.TRA.579 1 DRIVER FOR 9-25 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM ² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM ²		E.TRA.631 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM ² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM ²		E.TRA.632 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM ² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM ²		HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF

PROIETTORE ORIENTABILE

MAX 700MA

ADJUSTABLE FLOODLIGHT

MAX 700MA



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
5000W/▲RCCNB	STRETTO/14° NARROW/14°	2W	300 lm	240 lm	max 700mA	III	66	08	80
5000W/▲RCCMB	MEDIO/30° MEDIUM/30°	2W	300 lm	230 lm	max 700mA	III	66	08	80
5000W/▲RCCWB	LARGO/40° WIDE/40°	2W	300 lm	230 lm	max 700mA	III	66	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

KIT.022	KIT PICCHETTO PER PROIETTORE FLOODLIGHT SPIKE KIT	E.TRA.635.700	ALIMENTATORE DALI2 60W 700MA IP20 DRIVER DALI2 60W 700MA IP20
KIT.027	CINGHIA PER PROIETTORE STRAP FOR FLOODLIGHT	E.TRA.636.700	ALIMENTATORE CASAMBI 60W 700MA IP20 DRIVER CASAMBI 60W 700MA IP20
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.658.700	ALIMENTATORE ON/OFF 23W 700MA IP67 DRIVER ON/OFF 23W 700MA IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²	E.TRA.659.700	ALIMENTATORE DALI2 23W 700MA IP67 DRIVER DALI2 23W 700MA IP67
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²	HUB.700.001.ND	HUB 700MA IP66 ON/OFF CON DRIVER 60W IP20 HUB 700MA IP66 ON/OFF WITH DRIVER 60W IP20
E.TRA.621.700 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 20W 700MA IP20 DRIVER ON/OFF 20W 700MA IP20	HUB.700.001.DA2	HUB 700MA IP66 DALI-2 CON DRIVER 60W IP20 HUB 700MA IP66 DALI-2 WITH DRIVER 60W IP20
E.TRA.623.700 1 DRIVER FOR 1-14 LAMPS	ALIMENTATORE ON/OFF 36W 700MA IP20 DRIVER ON/OFF 36W 700MA IP20	HUB.700.001.CA	HUB 700MA IP66 CASAMBI CON DRIVER 60W IP20 HUB 700MA IP66 CASAMBI WITH DRIVER 60W IP20
E.TRA.634.700 1 DRIVER FOR 1-20 LAMPS	ALIMENTATORE ON/OFF 60W 700MA IP20 DRIVER ON/OFF 60W 700MA IP20		

ACCESSORI ACCESSORIES

CONNETTORI

CONNECTORS



MOR682P/2V

Connettore IP68 2Poli/2Vie 2 x 1 mm²
Connector IP68 2Poles/2Ways 2 x 1 mm²
L 72 x Ø 22



MOR685P/3VS

Scatola di connessione IP68 5Poli/3Vie 5 x 4 mm²
Connection Box IP68 5Poles/3Ways 5 x 4 mm²
L 127 x W 93 x H 35



MOR685P/4VS

Scatola di connessione IP68 5Poli/4Vie 5 x 4 mm²
Connection Box IP68 5Poles/4Ways 5 x 4 mm²
L 113 x W 93 x H 35

FISSAGGIO

FIXING



KIT.022

Kit picchetto per proiettore
Floodlight Spike Kit
L 40 x W 30 x H 235



KIT.027

Cinghia per proiettore
Strap for floodlight
L 2000 x H 25

ALIMENTATORI 24Vdc

DRIVER 24Vdc



E.TRA.577

1 Driver for 1-8 Lamps

Alimentatore ON/OFF 25W 24Vdc IP67
Driver ON/OFF 25W 24Vdc IP67
L 148 x W 40 x H 32



E.TRA.579

1 Driver for 9-25 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
L 140 x W 63 x H 32



E.TRA.631

1 Driver for 1-5 Lamps


Alimentatore ON/OFF 15W 24Vdc IP20
Driver ON/OFF 15W 24Vdc IP20
L 106 x W 33 x H 22



E.TRA.632

1 Driver for 1-20 Lamps


Alimentatore ON/OFF 70W 24Vdc IP20
Driver ON/OFF 70W 24Vdc IP20
L 124 x W 80 x H 22

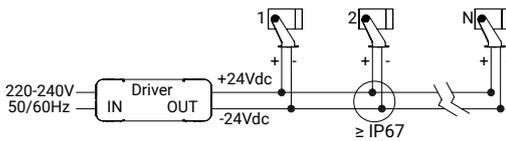

Collegamento in Parallelo
Parallel Wiring

HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA 24Vdc

HUB - READY TO CONNECT SYSTEM 24Vdc




HUB.24V.001.ND

1 Hub for 1-8 Lamps

Hub 70W 24Vdc IP66 ON/OFF
Hub 70W 24Vdc IP66 ON/OFF
L 235 x W 200 x H 92

ALIMENTATORI CC - 700mA

DRIVER CC - 700mA

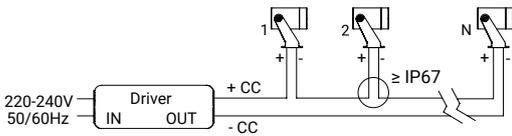

Collegamento in Serie
Series Wiring



E.TRA.621.700

1 Driver for 1-8 Lamps

Alimentatore ON/OFF 20W 700mA IP20

Driver ON/OFF 20W 700mA IP20

L 111 x W 52 x H 22



E.TRA.623.700

1 Driver for 1-14 Lamps

Alimentatore ON/OFF 36W 700mA IP20

Driver ON/OFF 36W 700mA IP20

L 163 x W 30 x H 21



E.TRA.634.700

1 Driver for 1-20 Lamps

Alimentatore ON/OFF 60W 700mA IP20

Driver ON/OFF 60W 700mA IP20

L 124 x W 80 x H 22



E.TRA.635.700

1 Driver for 1-20 Lamps

Alimentatore DALI2 60W 700mA IP20

Driver DALI2 60W 700mA IP20

L 124 x W 80 x H 22



E.TRA.636.700

1 Driver for 1-20 Lamps

Alimentatore CASAMBI 60W 700mA IP20

Driver CASAMBI 60W 700mA IP20

L 124 x W 80 x H 22



E.TRA.658.700

1 Driver for 1-12 Lamps

Alimentatore ON/OFF 23W 700mA IP67

Driver ON/OFF 23W 700mA IP67

L 124 x W 47 x H 26



E.TRA.659.700

1 Driver for 1-12 Lamps

Alimentatore DALI2 23W 700mA IP67

Driver DALI2 23W 700mA IP67

L 124 x W 47 x H 26

HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA CC 700mA

HUB - READY TO CONNECT SYSTEM CC 700mA



HUB.700.001.CA

1 Hub for 1-8 Lamps

Hub 700mA IP66 CASAMBI con driver 60W IP20

Hub 700mA IP66 CASAMBI with driver 60W IP20

L 235 x W 200 x H 92



HUB.700.001.DA2

1 Hub for 1-8 Lamps

Hub 700mA IP66 DALI-2 con driver 60W IP20

Hub 700mA IP66 DALI-2 with driver 60W IP20

L 235 x W 200 x H 92




HUB.700.001.ND

1 Hub for 1-8 Lamps

Hub 700mA IP66 ON/OFF con driver 60W IP20

Hub 700mA IP66 ON/OFF with driver 60W IP20

L 235 x W 200 x H 92







BLOOM

Proiettore orientabile
Adjustable floodlight

DESCRIZIONE *DESCRIZIONE*

La forma minimale ed il diametro di soli 55mm conferiscono alla serie Bloom larga adattabilità ad ogni progetto. Le misure ridotte garantiscono totale flessibilità, permettendo l'integrazione di Bloom in molteplici contesti. La sua versatilità può essere contestualizzata in giardini, per l'illuminazione di piante, siepi, aree fiorite o per valorizzare elementi architettonici, poiché la Luce è l'elemento fondamentale per una corretta percezione degli oggetti, degli spazi, delle emozioni.

The minimal shape and the diameter of only 55mm gives the Bloom series wide adaptability to any project. The reduced sizes guarantee total flexibility, allowing the integration of Bloom in multiple contexts. Its versatility can be contextualized in gardens, for the lighting of plants, hedges, flowered areas or to enhance architectural elements, since Light is the fundamental element for a correct perception of objects, spaces and emotions.

INSTALLAZIONE *INSTALLATION*

Installazione a terra, parete o soffitto

Ground, wall or ceiling installation

CORPO *BODY*

Alluminio da tornitura Serie 6000 anticorrosivo, per maggiore resistenza alla corrosione

Anticorrosive turning aluminum 6000 Series, for greater corrosion resistance

SCHERMO *SCREEN*

Vetro extrachiaro trasparente temprato

Extra clear transparent tempered glass

GUARNIZIONI *SEALS*

EPDM

EPDM

VITERIA *SCREWS*

Acciaio inox A2

Stainless steel A2

VERNICIATURA *FINISHING*

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder





FASCIO STRETTO 10°

NARROW BEAM 10°

5050W/NRRCNB

WATTAGGIO / WATTAGE **6W**

ALTEZZA INSTALLAZIONE /
INSTALLATION HEIGHT **4M**

INTERASSE APPARECCHI /
DISTANCE BETWEEN FIXTURES **4M**



FASCIO MEDIO 24°

MEDIUM BEAM 24°

5050W/NRRCMB

WATTAGGIO / WATTAGE **6W**

ALTEZZA INSTALLAZIONE /
INSTALLATION HEIGHT **4M**

INTERASSE APPARECCHI /
DISTANCE BETWEEN FIXTURES **4M**



FASCIO LARGO 36°

WIDE BEAM 36°

5050W/NRRCWB

WATTAGGIO / WATTAGE **6W**

ALTEZZA INSTALLAZIONE /
INSTALLATION HEIGHT **4M**

INTERASSE APPARECCHI /
DISTANCE BETWEEN FIXTURES **4M**



CONFIG. CODICE
CODE CONFIG.



▲ → **H=2700K**
W=3000K
N=4000K

VERSIONE IN TENSIONE
CONSTANT VOLTAGE


6W CON DRIVER REMOTO 24Vdc
6W REMOTE DRIVER 24Vdc

VERSIONE IN CORRENTE
CONSTANT CURRENT

6W CON DRIVER REMOTO MAX 500mA DC
6W REMOTE DRIVER MAX 500mA DC

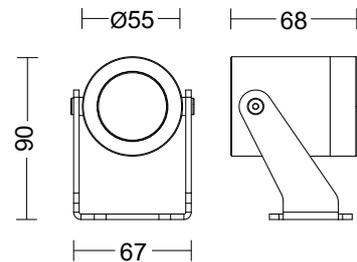

PROIETTORE ORIENTABILE
24VDC
ADJUSTABLE FLOODLIGHT
24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
5050W/▲RRCNB	STRETTO/10° NARROW/10°	6W	690 lm	520 lm	24Vdc	III	66	08	80
5050W/▲RRCMB	MEDIO/24° MEDIUM/24°	6W	690 lm	510 lm	24Vdc	III	66	08	80
5050W/▲RRCWB	LARGO/36° WIDE/36°	6W	690 lm	505 lm	24Vdc	III	66	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS


ON/OFF

ACCESSORI

ACCESSORIES

KIT.022	KIT PICCHETTO PER PROIETTORE FLOODLIGHT SPIKE KIT	E.TRA.631 1 DRIVER FOR 1-2 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20
KIT.027	CINGHIA PER PROIETTORE STRAP FOR FLOODLIGHT	E.TRA.632 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM ² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM ²	E.TRA.577 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM ² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM ²	E.TRA.579 1 DRIVER FOR 4-12 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM ² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM ²	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF

PROIETTORE ORIENTABILE
MAX 500MA
ADJUSTABLE FLOODLIGHT
MAX 500MA



CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
5050W/▲RCCNB	STRETTO/10° NARROW/10°	6W	690 lm	520 lm	max 500mA	III	66	08	80
5050W/▲RCCMB	MEDIO/24° MEDIUM/24°	6W	690 lm	510 lm	max 500mA	III	66	08	80
5050W/▲RCCWB	LARGO/36° WIDE/36°	6W	690 lm	505 lm	max 500mA	III	66	08	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

KIT.022	KIT PICCHETTO PER PROIETTORE FLOODLIGHT SPIKE KIT	E.TRA.635.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE DALI2 60W 500MA IP20 DRIVER DALI2 60W 500MA IP20
KIT.027	CINGHIA PER PROIETTORE STRAP FOR FLOODLIGHT	E.TRA.636.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE CASAMBI 60W 500MA IP20 DRIVER CASAMBI 60W 500MA IP20
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.658.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 23W 500MA IP67 DRIVER ON/OFF 23W 500MA IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²	E.TRA.659.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE DALI2 23W 500MA IP67 DRIVER DALI2 23W 500MA IP67
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²	HUB.500.001.ND 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 ON/OFF CON DRIVER 60W IP20 HUB 500MA IP66 ON/OFF WITH DRIVER 60W IP20
E.TRA.621.500 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 20W 500MA IP20 DRIVER ON/OFF 20W 500MA IP20	HUB.500.001.DA2 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 DALI-2 CON DRIVER 60W IP20 HUB 500MA IP66 DALI-2 WITH DRIVER 60W IP20
E.TRA.623.500 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 36W 500MA IP20 DRIVER ON/OFF 36W 500MA IP20	HUB.500.001.CA 1 HUB FOR 1-5 LAMPS	HUB 500MA IP66 CASAMBI CON DRIVER 60W IP20 HUB 500MA IP66 CASAMBI WITH DRIVER 60W IP20
E.TRA.634.500 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 60W 500MA IP20 DRIVER ON/OFF 60W 500MA IP20		

ACCESSORI ACCESSORIES

CONNETTORI

CONNECTORS



MOR682P/2V

Connettore IP68 2Poli/2Vie 2 x 1 mm²
Connector IP68 2Poles/2Ways 2 x 1 mm²
L 72 x Ø 22



MOR685P/3VS

Scatola di connessione IP68 5Poli/3Vie 5 x 4 mm²
Connection Box IP68 5Poles/3Ways 5 x 4 mm²
L 127 x W 93 x H 35



MOR685P/4VS

Scatola di connessione IP68 5Poli/4Vie 5 x 4 mm²
Connection Box IP68 5Poles/4Ways 5 x 4 mm²
L 113 x W 93 x H 35

FISSAGGIO

FIXING



KIT.022

Kit picchetto per proiettore
Floodlight Spike Kit
L 40 x W 30 x H 235




KIT.027

Cinghia per proiettore
Strap for floodlight
L 2000 x H 25

ALIMENTATORI 24Vdc

DRIVER 24Vdc

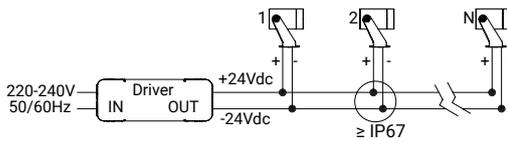

Collegamento in Parallelo
Parallel Wiring



E.TRA.577

1 Driver for 1-3 Lamps

Alimentatore ON/OFF 25W 24Vdc IP67
Driver ON/OFF 25W 24Vdc IP67
L 148 x W 40 x H 32



E.TRA.579

1 Driver for 4-12 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
L 140 x W 63 x H 32



E.TRA.631

1 Driver for 1-2 Lamps

Alimentatore ON/OFF 15W 24Vdc IP20
Driver ON/OFF 15W 24Vdc IP20
L 106 x W 33 x H 22




E.TRA.632

1 Driver for 1-8 Lamps

Alimentatore ON/OFF 70W 24Vdc IP20
Driver ON/OFF 70W 24Vdc IP20
L 124 x W 80 x H 22

HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA 24Vdc

HUB - READY TO CONNECT SYSTEM 24Vdc




HUB.24V.001.ND

1 Hub for 1-8 Lamps

Hub 70W 24Vdc IP66 ON/OFF
Hub 70W 24Vdc IP66 ON/OFF
L 235 x W 200 x H 92

ALIMENTATORI CC - 500mA

DRIVER CC - 500mA

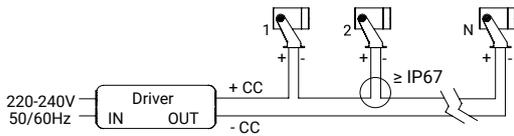

Collegamento in Serie
Series Wiring



E.TRA.621.500
1 Driver for 1-3 Lamps

Alimentatore ON/OFF 20W 500mA IP20
Driver ON/OFF 20W 500mA IP20
L 111 x W 52 x H 22



E.TRA.623.500
1 Driver for 1-4 Lamps

Alimentatore ON/OFF 36W 500mA IP20
Driver ON/OFF 36W 500mA IP20
L 163 x W 30 x H 21



E.TRA.634.500
1 Driver for 1-5 Lamps

Alimentatore ON/OFF 60W 500mA IP20
Driver ON/OFF 60W 500mA IP20
L 124 x W 80 x H 22



E.TRA.635.500
1 Driver for 1-5 Lamps

Alimentatore DALI2 60W 500mA IP20
Driver DALI2 60W 500mA IP20
L 124 x W 80 x H 22



E.TRA.636.500
1 Driver for 1-5 Lamps

Alimentatore CASAMBI 60W 500mA IP20
Driver CASAMBI 60W 500mA IP20
L 124 x W 80 x H 22



E.TRA.658.500
1 Driver for 1-3 Lamps

Alimentatore ON/OFF 23W 500mA IP67
Driver ON/OFF 23W 500mA IP67
L 124 x W 47 x H 26



E.TRA.659.500
1 Driver for 1-3 Lamps

Alimentatore DALI2 23W 500mA IP67
Driver DALI2 23W 500mA IP67
L 124 x W 47 x H 26

HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA CC 500mA

HUB - READY TO CONNECT SYSTEM CC 500mA



HUB.500.001.CA
1 Hub for 1-5 Lamps

Hub 500mA IP66 CASAMBI con driver 60W IP20
Hub 500mA IP66 CASAMBI with driver 60W IP20
L 235 x W 200 x H 92




HUB.500.001.DA2
1 Hub for 1-5 Lamps

Hub 500mA IP66 DALI-2 con driver 60W IP20
Hub 500mA IP66 DALI-2 with driver 60W IP20
L 235 x W 200 x H 92



HUB.500.001.ND
1 Hub for 1-5 Lamps

Hub 500mA IP66 ON/OFF con driver 60W IP20
Hub 500mA IP66 ON/OFF with driver 60W IP20
L 235 x W 200 x H 92







BLOOM MAXI

Proiettore orientabile maxi
Maxi adjustable floodlight

DESCRIZIONE DESCRIZIONE

La forma minimale conferisce alla serie Bloom Maxi larga adattabilità ad ogni progetto. Le misure ridotte garantiscono totale flessibilità, permettendo l'integrazione di Bloom Maxi in molteplici contesti. La sua versatilità può essere contestualizzata in giardini, per l'illuminazione di piante, siepi, aree fiorite o per valorizzare elementi architettonici, poiché la Luce è l'elemento fondamentale per una corretta percezione degli oggetti, degli spazi, delle emozioni.

The minimal shape gives the Bloom Maxi series wide adaptability to any project. The reduced sizes guarantee total flexibility, allowing the integration of Bloom Maxi in multiple contexts. Its versatility can be contextualized in gardens, for the lighting of plants, hedges, flowered areas or to enhance architectural elements, since Light is the fundamental element for a correct perception of objects, spaces and emotions.

INSTALLAZIONE INSTALLATION

Installazione a terra, parete o soffitto

Ground, wall or ceiling installation

CORPO BODY

Alluminio da tornitura Serie 6000 anticorrosivo, per maggiore resistenza alla corrosione

Anticorrosive turning aluminum 6000 Series, for greater corrosion resistance

SCHERMO SCREEN

Vetro extrachiaro trasparente temperato

Extra clear transparent tempered glass

GUARNIZIONI SEALS

EPDM

EPDM

VITERIA SCREWS

Acciaio inox A2

Stainless steel A2

VERNICIATURA FINISHING

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder







**CONFIG.
CODICE
CODE
CONFIG.**



▲ → **H=2700K
W=3000K
N=4000K**

**VERSIONE IN
TENSIONE
CONSTANT
VOLTAGE**

15W CON DRIVER REMOTO 24Vdc
15W REMOTE DRIVER 24Vdc

**VERSIONE IN
CORRENTE
CONSTANT
CURRENT**

15W CON DRIVER REMOTO MAX 700mA DC
15W REMOTE DRIVER MAX 700mA DC

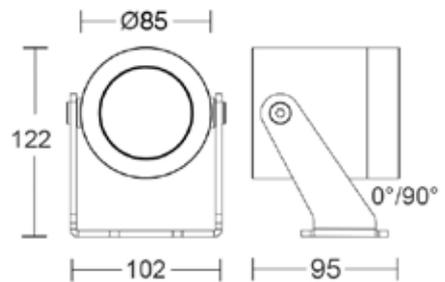


IP 66

IK 09



**HUB
SYSTEM**

PROIETTORE ORIENTABILE
24VDC
ADJUSTABLE FLOODLIGHT
24VDC



CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
5085W/▲RRCNB	STRETTO/10° NARROW/10°	15W	1700 lm	1530 lm	24Vdc	III	66	09	80
5085W/▲RRCMB	MEDIO/26° MEDIUM/26°	15W	1700 lm	1500 lm	24Vdc	III	66	09	80
5085W/▲RRCWB	LARGO/56° WIDE/56°	15W	1700 lm	1440 lm	24Vdc	III	66	09	80


VETRO EXTRACHIARO TRASPARENTE TEMPRATO – EXTRA CLEAR TRANSPARENT TEMPERED GLASS
 ON/OFF

ACCESSORI

ACCESSORIES

KIT.032	KIT PICCHETTO PER PROIETTORE FLOODLIGHT SPIKE KIT	E.TRA.632 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20
KIT.033	CINGHIA PER PROIETTORE STRAP FOR FLOODLIGHT	E.TRA.577 1 DRIVER FOR 1 LAMP	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
V.SCH.086.XX	HONEYCOMB PER BLOOM MAXI HONEYCOMB FOR BLOOM MAXI	E.TRA.579 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM ² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM ²	E.TRA.592 1 DRIVER FOR 1-12 LAMPS	ALIMENTATORE ON/OFF ELG 240W 24VDC IP67 DRIVER ON/OFF ELG 240W 24VDC IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM ² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM ²	HUB.24V.001.ND 1 HUB FOR 1-4 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM ² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM ²		

PROIETTORE ORIENTABILE
MAX 700MA
ADJUSTABLE FLOODLIGHT
MAX 700MA



CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
5085W/▲RCCNB	STRETTO/10° <i>NARROW/10°</i>	15W	1700 lm	1530 lm	max 700mA	III	66	09	80
5085W/▲RCCMB	MEDIO/26° <i>MEDIUM/26°</i>	15W	1700 lm	1500 lm	max 700mA	III	66	09	80
5085W/▲RCCWB	LARGO/56° <i>WIDE/56°</i>	15W	1700 lm	1440 lm	max 700mA	III	66	09	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

KIT.032	KIT PICCHETTO PER PROIETTORE <i>FLOODLIGHT SPIKE KIT</i>	E.TRA.635.700 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE DALI2 60W 700MA IP20 <i>DRIVER DALI2 60W 700MA IP20</i>
KIT.033	CINGHIA PER PROIETTORE <i>STRAP FOR FLOODLIGHT</i>	E.TRA.636.700 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE CASAMBI 60W 700MA IP20 <i>DRIVER CASAMBI 60W 700MA IP20</i>
V.SCH.086.XX	HONEYCOMB PER BLOOM MAXI <i>HONEYCOMB FOR BLOOM MAXI</i>	E.TRA.658.700 1 DRIVER FOR 1-2 LAMPS	ALIMENTATORE ON/OFF 23W 700MA IP67 <i>DRIVER ON/OFF 23W 700MA IP67</i>
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM ² <i>CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²</i>	E.TRA.659.700 1 DRIVER FOR 1-2 LAMPS	ALIMENTATORE DALI2 23W 700MA IP67 <i>DRIVER DALI2 23W 700MA IP67</i>
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM ² <i>CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²</i>	HUB.700.001.ND 1 DRIVER FOR 1-3 LAMPS	HUB 700MA IP66 ON/OFF CON DRIVER 60W IP20 <i>HUB 700MA IP66 ON/OFF WITH DRIVER 60W IP20</i>
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM ² <i>CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²</i>	HUB.700.001.DA2 1 DRIVER FOR 1-3 LAMPS	HUB 700MA IP66 DALI-2 CON DRIVER 60W IP20 <i>HUB 700MA IP66 DALI-2 WITH DRIVER 60W IP20</i>
E.TRA.621.700 1 DRIVER FOR 1 LAMP	ALIMENTATORE ON/OFF 20W 700MA IP20 <i>DRIVER ON/OFF 20W 700MA IP20</i>	HUB.700.001.CA 1 DRIVER FOR 1-3 LAMPS	HUB 700MA IP66 CASAMBI CON DRIVER 60W IP20 <i>HUB 700MA IP66 CASAMBI WITH DRIVER 60W IP20</i>
E.TRA.634.700 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 60W 700MA IP20 <i>DRIVER ON/OFF 60W 700MA IP20</i>		

ACCESSORI

ACCESSORIES

CONNETTORI

CONNECTORS



MOR682P/2V

Connettore IP68 2Poli/2Vie 2 x 1 mm²
Connector IP68 2Poles/2Ways 2 x 1 mm²
 L 72 x Ø 22



MOR685P/3VS

Scatola di connessione IP68 5Poli/3Vie 5 x 4 mm²
Connection Box IP68 5Poles/3Ways 5 x 4 mm²
 L 127 x W 93 x H 35



MOR685P/4VS

Scatola di connessione IP68 5Poli/4Vie 5 x 4 mm²
Connection Box IP68 5Poles/4Ways 5 x 4 mm²
 L 113 x W 93 x H 35

FISSAGGIO

FIXING



KIT.032

Kit picchetto per proiettore
Floodlight Spike Kit
 H 235 x Ø 85



KIT.033

Cinghia per proiettore
Strap for floodlight
 L 2000 x H 25

VISIERE

VISORS




V.SCH.086.XX

Honeycomb per Bloom Maxi
Honeycomb for Bloom Maxi
 Ø 59 x H 5

ALIMENTATORI 24Vdc

DRIVER 24Vdc

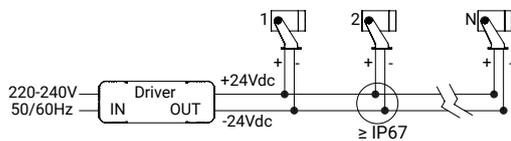

Collegamento in Parallelo
 Parallel Wiring



E.TRA.577

1 Driver for 1 Lamp

Alimentatore ON/OFF 25W 24Vdc IP67
Driver ON/OFF 25W 24Vdc IP67
 L 148 x W 40 x H 32



E.TRA.579

1 Driver for 1-5 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
 L 140 x W 63 x H 32



E.TRA.592

1 Driver for 1-12 Lamps

Alimentatore ON/OFF ELG 240W 24Vdc IP67
Driver ON/OFF ELG 240W 24Vdc IP67
 L 244 x W 71 x H 38




E.TRA.632

1 Driver for 1-3 Lamps

Alimentatore ON/OFF 70W 24Vdc IP20
Driver ON/OFF 70W 24Vdc IP20
 L 124 x W 80 x H 22

HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA 24Vdc

HUB - READY TO CONNECT SYSTEM 24Vdc

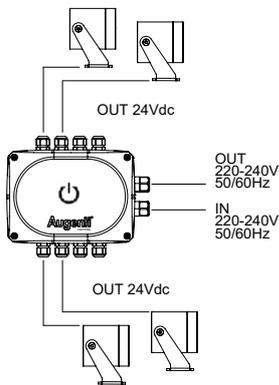


HUB.24V.001.ND
1 Hub for 1-4 Lamps

Hub 70W 24Vdc IP66 ON/OFF
Hub 70W 24Vdc IP66 ON/OFF
L 235 x W 200 x H 92

ALIMENTATORI CC - 700mA

DRIVER CC - 700mA

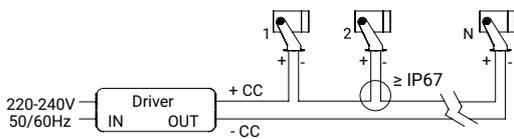

Collegamento in Serie
Series Wiring



E.TRA.621.700
1 Driver for 1 Lamp

Alimentatore ON/OFF 20W 700mA IP20
Driver ON/OFF 20W 700mA IP20
L 111 x W 52 x H 22



E.TRA.634.700
1 Driver for 1-3 Lamps

Alimentatore ON/OFF 60W 700mA IP20
Driver ON/OFF 60W 700mA IP20
L 124 x W 80 x H 22



E.TRA.635.700
1 Driver for 1-3 Lamps

Alimentatore DALI2 60W 700mA IP20
Driver DALI2 60W 700mA IP20
L 124 x W 80 x H 22



E.TRA.636.700
1 Driver for 1-3 Lamps

Alimentatore CASAMBI 60W 700mA IP20
Driver CASAMBI 60W 700mA IP20
L 124 x W 80 x H 22



E.TRA.658.700
1 Driver for 1-2 Lamps

Alimentatore ON/OFF 23W 700mA IP67
Driver ON/OFF 23W 700mA IP67
L 124 x W 47 x H 26




E.TRA.659.700
1 Driver for 1-2 Lamps

Alimentatore DALI2 23W 700mA IP67
Driver DALI2 23W 700mA IP67
L 124 x W 47 x H 26

HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA CC 700mA

HUB - READY TO CONNECT SYSTEM CC 700mA

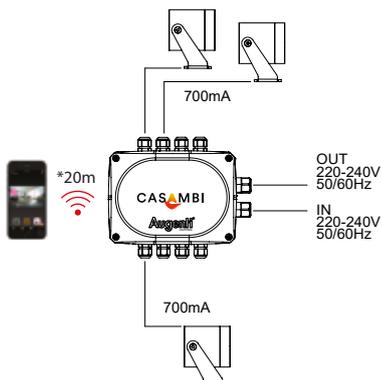

HUB.700.001.CA
1 Driver for 1-3 Lamps

Hub 700mA IP66 CASAMBI con driver 60W IP20
Hub 700mA IP66 CASAMBI with driver 60W IP20
L 235 x W 200 x H 92



HUB.700.001.DA2
1 Driver for 1-3 Lamps


Hub 700mA IP66 DALI-2 con driver 60W IP20
Hub 700mA IP66 DALI-2 with driver 60W IP20
L 235 x W 200 x H 92



HUB.700.001.ND
1 Driver for 1-3 Lamps

Hub 700mA IP66 ON/OFF con driver 60W IP20
Hub 700mA IP66 ON/OFF with driver 60W IP20
L 235 x W 200 x H 92





MODO

Apparecchio compatto modulare
Compact modular device

DESCRIZIONE *DESCRIZIONE*

Un semplice parallelepipedo, dalla linea minimale e dalle dimensioni compatte. In grado di essere proiettore, in verticale o in orizzontale, orientabile in funzione delle esigenze di luce. Modo offre la possibilità di combinarlo in un sistema modulare, componibile in entrambe le direzioni planari, a formare un prodotto diverso e dalle infinite capacità. Un sistema, quindi, più che un singolo volume, in grado di evolvere in più varianti geometriche e ottiche e di supportare, così, le molteplici e diversificate esigenze del lighting designer.

A simple parallelepiped, with a minimal line and compact dimensions. Able to be a projector, vertically or horizontally, adjustable according to the light requirements. Modo offers the possibility of combining it in a modular system, which can be combined in both planar directions, to form a different product with infinite capabilities. A system, therefore, more than a single volume, capable of evolving into multiple geometric and optical variants and thus supporting the multiple and diversified needs of the lighting designer.

INSTALLAZIONE *INSTALLATION*

Installazione a terra, parete o soffitto

Ground, wall or ceiling installation

CORPO *BODY*

Alluminio pressofuso

Die-cast aluminium

SCHERMO *SCREEN*

Vetro extrachiaro trasparente temprato

Extra clear transparent tempered glass

GUARNIZIONI *SEALS*

EPDM a celle chiuse

Closed-cell EPDM

VITERIA *SCREWS*

Acciaio inox A2


Stainless steel A2

VERNICIATURA *FINISHING*

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder








**CONFIG.
CODICE
CODE
CONFIG.**

▲ → **H=2700K
W=3000K
N=4000K**

ALIMENTAZIONE
INPUT SUPPLY


220-240VAC 50/60HZ
220-240VAC 50/60HZ

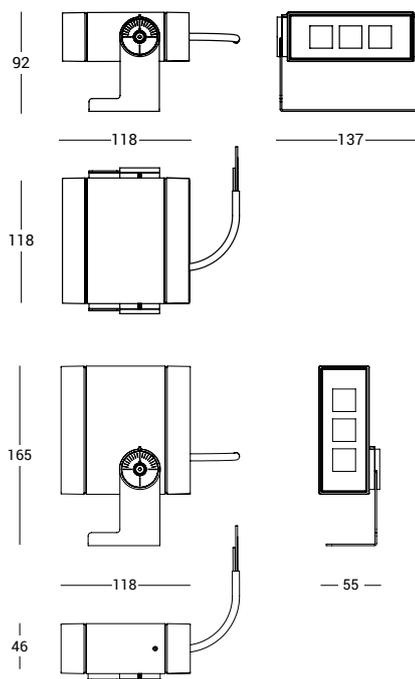

IP 65


IK 07

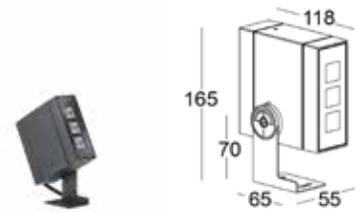

MODULO EMISSIONE VERTICALE**MODULE VERTICAL EMISSION**

CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
610W1/▲P70NB	STRETTO/12° <i>NARROW/12°</i>	8W	790 lm	662 lm	220-240Vac 50/60Hz	I	65	07	>80
610W1/▲P70MB	MEDIO/28° <i>MEDIUM/28°</i>	8W	790 lm	656 lm	220-240Vac 50/60Hz	I	65	07	>80
610W1/▲P70WB	LARGO/50° <i>WIDE/50°</i>	8W	790 lm	643 lm	220-240Vac 50/60Hz	I	65	07	>80
610W1/▲P70BB	SINGOLO LAMA DI LUCE/4° <i>SINGLE BLADE OF LIGHT/4°</i>	3.5W	260 lm	237 lm	220-240Vac 50/60Hz	I	65	07	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS
ON/OFF

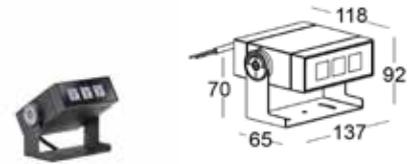MODULO EMISSIONE ORIZZONTALE**MODULE HORIZONTAL EMISSION**

CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
611W1/▲P70NB	STRETTO/12° <i>NARROW/12°</i>	8W	790 lm	662 lm	220-240Vac 50/60Hz	I	65	07	>80
611W1/▲P70MB	MEDIO/28° <i>MEDIUM/28°</i>	8W	790 lm	656 lm	220-240Vac 50/60Hz	I	65	07	>80
611W1/▲P70WB	LARGO/50° <i>WIDE/50°</i>	8W	790 lm	643 lm	220-240Vac 50/60Hz	I	65	07	>80
611W1/▲P70BB	SINGOLO LAMA DI LUCE/4° <i>SINGLE BLADE OF LIGHT/4°</i>	3.5W	260 lm	237 lm	220-240Vac 50/60Hz	I	65	07	>80


VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS
ON/OFF

ACCESSORI**ACCESSORIES**

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM ² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM ²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
-------------------	---	------------------	--

MODULO DALI EMISSIONE VERTICALE

MODULE DALI VERTICAL EMISSION




CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
610W1/▲D70NB	STRETTO/12° <i>NARROW/12°</i>	8W	790 lm	662 lm	220-240Vac 50/60Hz	I	65	07	>80
610W1/▲D70MB	MEDIO/28° <i>MEDIUM/28°</i>	8W	790 lm	656 lm	220-240Vac 50/60Hz	I	65	07	>80
610W1/▲D70WB	LARGO/50° <i>WIDE/50°</i>	8W	790 lm	643 lm	220-240Vac 50/60Hz	I	65	07	>80
610W1/▲D70BB	SINGOLO LAMA DI LUCE/4° <i>SINGLE BLADE OF LIGHT/4°</i>	3.5W	260 lm	237 lm	220-240Vac 50/60Hz	I	65	07	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DALI-2 INTEGRATO - DALI-2 INTEGRATED

MODULO DALI EMISSIONE ORIZZONTALE

MODULE DALI HORIZONTAL EMISSION

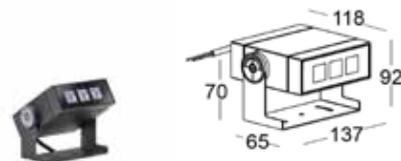

CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
611W1/▲D70NB	STRETTO/12° <i>NARROW/12°</i>	8W	790 lm	662 lm	220-240Vac 50/60Hz	I	65	07	>80
611W1/▲D70MB	MEDIO/28° <i>MEDIUM/28°</i>	8W	790 lm	656 lm	220-240Vac 50/60Hz	I	65	07	>80
611W1/▲D70WB	LARGO/50° <i>WIDE/50°</i>	8W	790 lm	643 lm	220-240Vac 50/60Hz	I	65	07	>80
611W1/▲D70BB	SINGOLO LAMA DI LUCE/4° <i>SINGLE BLADE OF LIGHT/4°</i>	3.5W	260 lm	237 lm	220-240Vac 50/60Hz	I	65	07	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DALI-2 INTEGRATO - DALI-2 INTEGRATED

ACCESSORI

ACCESSORIES

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM ² <i>CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²</i>	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 <i>SURGE PROTECTOR CL I - IP67</i>
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM ² <i>CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²</i>		





KUBO6

Proiettore orientabile
Adjustable floodlight

DESCRIZIONE *DESCRIZIONE*

Proiettore orientabile compatto. Adatto per l'installazione a parete, a soffitto e a terra, disponibile anche versione con picchetto per la sola installazione a terra. Dotato di ottica secondaria per diverse distribuzioni di luce e con un'ampia scelta di accessori utili per il controllo del flusso luminoso e del comfort visivo.

Compact adjustable floodlight. Suitable for wall, ceiling and floor installation, also available spike version for ground installation only. Equipped with secondary optics for different light distributions and with a wide selection of accessories useful for controlling the luminous flux and visual comfort.

INSTALLAZIONE *INSTALLATION*

Installazione a terra, parete o soffitto

Ground, wall or ceiling installation

CORPO *BODY*

Alluminio pressofuso

Die-cast aluminium

SCHERMO *SCREEN*

Vetro extrachiaro trasparente temprato

Extra clear transparent tempered glass

GUARNIZIONI *SEALS*

EPDM

EPDM

VITERIA *SCREWS*

Acciaio inox A2

Stainless steel A2

VERNICIATURA *FINISHING*

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder







**CONFIG.
CODICE**
CODE
CONFIG.


▲ → **H=2700K**
W=3000K
N=4000K

**VERSIONE IN
TENSIONE**
CONSTANT
VOLTAGE


8W CON DRIVER REMOTO 24Vdc
8W REMOTE DRIVER 24Vdc

**VERSIONE
220-240V**
220-240V
VERSION

ALIMENTAZIONE DIRETTA
DIRECT AC




— 69 —



87

— 67 —



KUBO6-S**PROIETTORE ORIENTABILE****24VDC****ADJUSTABLE FLOODLIGHT****24VDC**

CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
2107W/▲CRCNB	STRETTO/10° NARROW/10°	8W	860 lm	720 lm	24Vdc	III	66	07	>80
2107W/▲CRCMB	MEDIO/26° MEDIUM/26°	8W	860 lm	720 lm	24Vdc	III	66	07	>80
2107W/▲CRCWB	LARGO/56° WIDE/56°	8W	860 lm	720 lm	24Vdc	III	66	07	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

ON/OFF

ACCESSORI

ACCESSORIES

KIT.022	KIT PICCHETTO PER PROIETTORE FLOODLIGHT SPIKE KIT	E.TRA.631 1 DRIVER FOR 1-2 LAMPS	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20
AC2106	VISIERA ANTIABBAGLIAMENTO PER KUBO6 ANTI-GLARE VISOR FOR KUBO6	E.TRA.632 1 DRIVER FOR 1-10 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20
KIT.036	BRACCIO PER ESTENSIONE A PARETE EXTENSION ARM FOR WALL	E.TRA.577 1 DRIVER FOR 1-3 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM ² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM ²	E.TRA.579 1 DRIVER FOR 4-14 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM ² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM ²	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM ² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM ²		

PROIETTORE ORIENTABILE
LED DIRECT AC
ADJUSTABLE FLOODLIGHT
LED DIRECT AC



CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
2107W/WCACNB	STRETTO/20° <i>NARROW/20°</i>	7W	680 lm	476 lm	220-240Vac 50/60Hz	I	66	07	>80
2107W/WCACWB	LARGO/40° <i>WIDE/40°</i>	7W	680 lm	476 lm	220-240Vac 50/60Hz	I	66	07	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

ON/OFF

ACCESSORI

ACCESSORIES

KIT.022	KIT PICCHETTO PER PROIETTORE <i>FLOODLIGHT SPIKE KIT</i>	MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² <i>CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²</i>
AC2106	VISIERA ANTIABBAGLIAMENTO PER KUBO6 <i>ANTI-GLARE VISOR FOR KUBO6</i>	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² <i>CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²</i>
KIT.036	BRACCIO PER ESTENSIONE A PARETE <i>EXTENSION ARM FOR WALL</i>	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 <i>SURGE PROTECTOR CL I - IP67</i>
MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2,5 MM² <i>CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²</i>		

ACCESSORI

ACCESSORIES

CONNETTORI

CONNECTORS



MOR682P/2V

Connettore IP68 2Poli/2Vie 2 x 1 mm²
 Connector IP68 2Poles/2Ways 2 x 1 mm²
 L 72 x Ø 22



MOR683P/2V

Connettore IP68 3Poli/2Vie 3 x 2.5 mm²
 Connector IP68 3Poles/2Ways 3 x 2.5 mm²
 L 95 x Ø 31



MOR685P/3VS

Scatola di connessione IP68 5Poli/3Vie 5 x 4 mm²
 Connection Box IP68 5Poles/3Ways 5 x 4 mm²
 L 127 x W 93 x H 35



MOR685P/4VS

Scatola di connessione IP68 5Poli/4Vie 5 x 4 mm²
 Connection Box IP68 5Poles/4Ways 5 x 4 mm²
 L 113 x W 93 x H 35

FISSAGGIO

FIXING



KIT.022

Kit picchetto per proiettore
 Floodlight Spike Kit
 L 40 x W 30 x H 235



KIT.036

Braccio per estensione a parete
 Extension arm for wall
 L 500

VISIERE

VISORS



AC2106

Visiera antiabbagliamento per Kubo6
 Anti-glare visor for Kubo6
 L 65 x H 65

PROTEZIONE ALLE SOVRATENSIONI

SURGE PROTECTOR




E.TRA.580

Limitatore di sovratensione CL I - IP67
 Surge protector CL I - IP67
 L 37 x W 30 x H 30

ALIMENTATORI 24Vdc

DRIVER 24Vdc

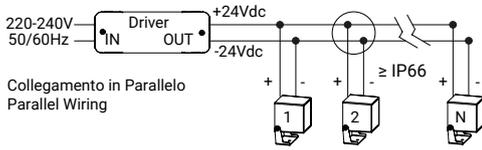

E.TRA.577

1 Driver for 1-3 Lamps

Alimentatore ON/OFF 25W 24Vdc IP67

Driver ON/OFF 25W 24Vdc IP67

L 148 x W 40 x H 32



E.TRA.579

1 Driver for 4-14 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67

Driver ON/OFF 100W 24Vdc IP67

L 140 x W 63 x H 32



E.TRA.631

1 Driver for 1-2 Lamps

Alimentatore ON/OFF 15W 24Vdc IP20

Driver ON/OFF 15W 24Vdc IP20

L 106 x W 33 x H 22



E.TRA.632

1 Driver for 1-10 Lamps

Alimentatore ON/OFF 70W 24Vdc IP20

Driver ON/OFF 70W 24Vdc IP20

L 124 x W 80 x H 22

HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA 24Vdc

HUB - READY TO CONNECT SYSTEM 24Vdc




HUB.24V.001.ND

1 Hub for 1-8 Lamps

Hub 70W 24Vdc IP66 ON/OFF

Hub 70W 24Vdc IP66 ON/OFF

L 235 x W 200 x H 92







KUBO12

Proiettore orientabile
Adjustable floodlight

DESCRIZIONE *DESCRIZIONE*

Proiettore orientabile compatto. Adatto per l'installazione a parete, a soffitto e a terra, disponibile anche versione con picchetto per la sola installazione a terra. Dotato di ottica secondaria per diverse distribuzioni di luce e con un'ampia scelta di accessori utili per il controllo del flusso luminoso e del comfort visivo. Disponibile anche la versione RGBW.

Compact adjustable floodlight. Suitable for wall, ceiling and floor installation, also available spike version for ground installation only. Equipped with secondary optics for different light distributions and with a wide selection of accessories useful for controlling the luminous flux and visual comfort. RGBW version also available.

INSTALLAZIONE *INSTALLATION*

Installazione a terra, parete o soffitto

Ground, wall or ceiling installation

CORPO *BODY*

Alluminio pressofuso

Die-cast aluminium

SCHERMO *SCREEN*

Vetro extrachiaro trasparente temperato

Extra clear transparent tempered glass

GUARNIZIONI *SEALS*

EPDM

EPDM

VITERIA *SCREWS*


Acciaio inox A2

Stainless steel A2

VERNICIATURA *FINISHING*

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder

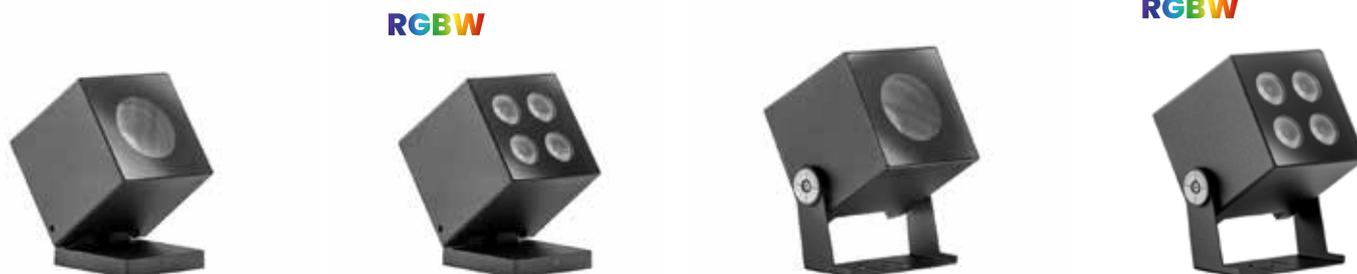







**CONFIG.
CODICE
CODE
CONFIG.**

▲ → **H=2700K
W=3000K
N=4000K**


ALIMENTAZIONE
INPUT SUPPLY

220-240VAC 50/60HZ
220-240VAC 50/60HZ

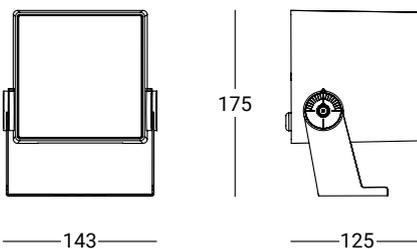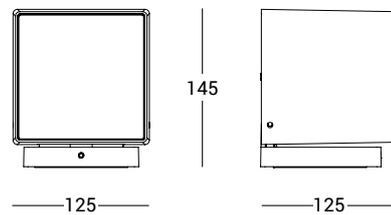

KUBO12-B

PROIETTORE ORIENTABILE
DRIVER INCORPORATO
ADJUSTABLE FLOODLIGHT
BUILT-IN DRIVER




CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
2112W/▲C35.NB	STRETTO/10° <i>NARROW/10°</i>	14W	1700 lm	1270 lm	220-240Vac 50/60Hz	I	66	07	>80
2112W/▲C35.MB	MEDIO/38° <i>MEDIUM/38°</i>	14W	1700 lm	1340 lm	220-240Vac 50/60Hz	I	66	07	>80
2112W/▲C35.WB	LARGO/56° <i>WIDE/56°</i>	14W	1700 lm	1400 lm	220-240Vac 50/60Hz	I	66	07	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS
 ON/OFF

ACCESSORI*ACCESSORIES*

AC2112	VISIERA ANTIABBAGLIAMENTO PER KUBO12 <i>ANTI-GLARE VISOR FOR KUBO12</i>	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL1- IP67 <i>SURGE PROTECTOR CL1- IP67</i>
KIT.036	BRACCIO PER ESTENSIONE A PARETE <i>EXTENSION ARM FOR WALL</i>		

PROIETTORE ORIENTABILE DALI
DRIVER INCORPORATO
ADJUSTABLE FLOODLIGHT DALI
BUILT-IN DRIVER



CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
2112W/▲D35.NB	 STRETTO/10° <i>NARROW/10°</i>	14W	1700 lm	1340 lm	220-240Vac 50/60Hz	I	66	07	>80
2112W/▲D35.MB	 MEDIO/38° <i>MEDIUM/38°</i>	14W	1700 lm	1270 lm	220-240Vac 50/60Hz	I	66	07	>80
2112W/▲D35.WB	 LARGO/56° <i>WIDE/56°</i>	14W	1700 lm	1400 lm	220-240Vac 50/60Hz	I	66	07	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DALI-2 INTEGRATO - DALI-2 INTEGRATED


ACCESSORI

ACCESSORIES

AC2112	VISIERA ANTIABBAGLIAMENTO PER KUBO12 <i>ANTI-GLARE VISOR FOR KUBO12</i>	MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM ² <i>CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²</i>
KIT.036	BRACCIO PER ESTENSIONE A PARETE <i>EXTENSION ARM FOR WALL</i>	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 <i>SURGE PROTECTOR CL I - IP67</i>
MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM ² <i>CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²</i>		

KUBO12-B RGBW

RGBW

PROIETTORE ORIENTABILE RGBW**24VDC***ADJUSTABLE FLOODLIGHT RGBW***24VDC**

CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
2112W/RCRC.NB	 STRETTO/10° <i>NARROW/10°</i>	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	66	07	RGBW
2112W/RCRC.MB	 MEDIO/20° <i>MEDIUM/20°</i>	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	66	07	RGBW
2112W/RCRC.WB	 LARGO/30° <i>WIDE/30°</i>	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	66	07	RGBW
2112W/RCRC.SW	 MOLTO LARGO/60° <i>SUPER WIDE/60°</i>	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	66	07	RGBW

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DIMMERABILE - DIMMABLE

ACCESSORI*ACCESSORIES*

AC2112	VISIERA ANTIABBAGLIAMENTO PER KUBO12 <i>ANTI-GLARE VISOR FOR KUBO12</i>	E.CNT.001	TASTIERA RGBW 16DMX CH.12-24VDC <i>RGBW CONTROLLER 16DMX CH.12-24VDC</i>
KIT.036	BRACCIO PER ESTENSIONE A PARETE <i>EXTENSION ARM FOR WALL</i>	E.CNT.002	TASTIERA RGBW 1024DMX CH.5-15VDC <i>RGBW CONTROLLER 1024DMX CH.5-15VDC</i>
E.TRA.579 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 <i>DRIVER ON/OFF 100W 24VDC IP67</i>	E.TRA.594	SPLITTER DMX-RDM 2 CANALI <i>SPLITTER DMX-RDM 2 CHANNELS</i>
E.TRA.592 1 DRIVER FOR 5-9 LAMPS	ALIMENTATORE ON/OFF ELG 240W 24VDC IP67 <i>DRIVER ON/OFF ELG 240W 24VDC IP67</i>		

ACCESSORI ACCESSORIES

FISSAGGIO

FIXING



KIT.036

Braccio per estensione a parete

Extension arm for wall

L 500

VISIERE

VISORS



AC2112

Visiera antiabbagliamento per Kubo12

Anti-glare visor for Kubo12

L 125 x H 125

ALIMENTATORI 24Vdc

DRIVER 24Vdc



E.TRA.579

Alimentatore ON/OFF 100W 24Vdc IP67

1 Driver for 1-4 Lamps

Driver ON/OFF 100W 24Vdc IP67

L 140 x W 63 x H 32



E.TRA.592

Alimentatore ON/OFF ELG 240W 24Vdc IP67

1 Driver for 5-9 Lamps

Driver ON/OFF ELG 240W 24Vdc IP67

L 244 x W 71 x H 38

CENTRALINE RGBW

RGBW CONTROL UNITS



E.TRA.594

Splitter DMX-RDM 2 Canali

Splitter DMX-RDM 2 Channels

L 88 x W 54 x H 26

CONTROLLER TOUCH

TOUCH CONTROLLER



E.CNT.001

Tastiera RGBW 16DMX Ch.12-24Vdc

RGBW Controller 16DMX Ch.12-24Vdc

L 75 x W 29.5 x H 120




E.CNT.002

Tastiera RGBW 1024DMX Ch.5-15Vdc


RGBW Controller 1024DMX Ch.5-15Vdc

L 146 x W 10 x H 106

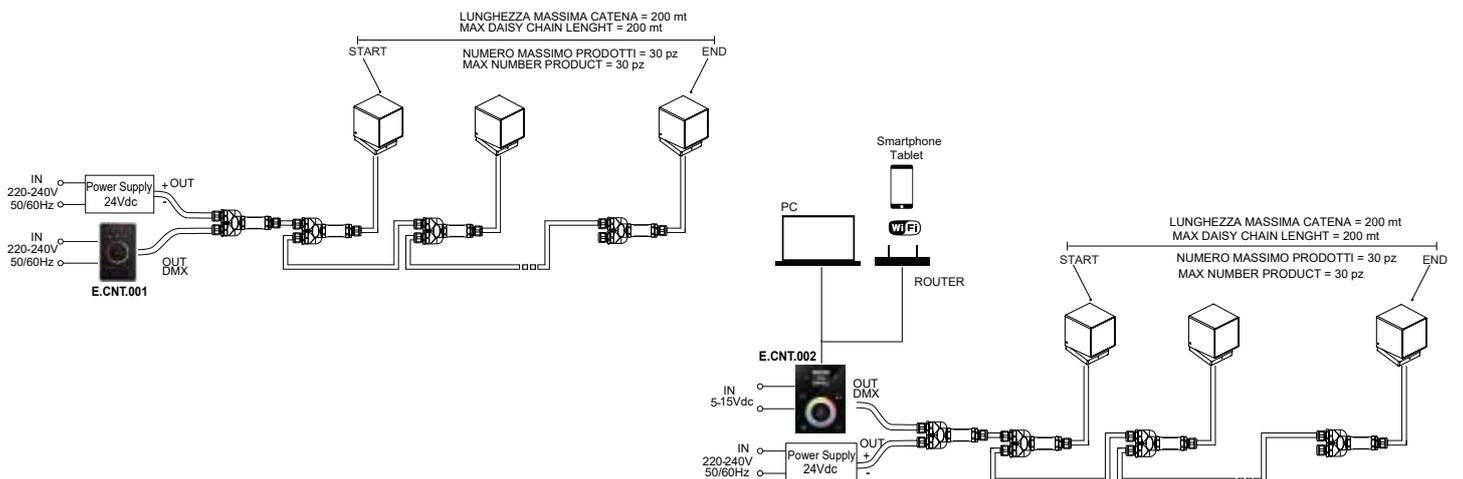

KUBO12-S

PROIETTORE ORIENTABILE
DRIVER INCORPORATO
ADJUSTABLE FLOODLIGHT
BUILT-IN DRIVER




CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
2113W/▲C35NB	STRETTO/10° <i>NARROW/10°</i>	14W	1700 lm	1270 lm	220-240Vac 50/60Hz	I	66	07	>80
2113W/▲C35MB	MEDIO/38° <i>MEDIUM/38°</i>	14W	1700 lm	1340 lm	220-240Vac 50/60Hz	I	66	07	>80
2113W/▲C35WB	LARGO/56° <i>WIDE/56°</i>	14W	1700 lm	1400 lm	220-240Vac 50/60Hz	I	66	07	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS
 ON/OFF

ACCESSORI*ACCESSORIES*

KIT.032	KIT PICCHETTO PER PROIETTORE <i>FLOODLIGHT SPIKE KIT</i>	MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² <i>CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²</i>
AC2112	VISIERA ANTIABBAGLIAMENTO PER KUBO12 <i>ANTI-GLARE VISOR FOR KUBO12</i>	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² <i>CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²</i>
KIT.036	BRACCIO PER ESTENSIONE A PARETE <i>EXTENSION ARM FOR WALL</i>	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 <i>SURGE PROTECTOR CL I - IP67</i>
MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2,5 MM² <i>CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²</i>		

PROIETTORE ORIENTABILE DALI
DRIVER INCORPORATO
ADJUSTABLE FLOODLIGHT DALI
BUILT-IN DRIVER



CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
2113W/▲D35NB	STRETTO/10° <i>NARROW/10°</i>	14W	1700 lm	1270 lm	220-240Vac 50/60Hz	I	66	07	>80
2113W/▲D35MB	MEDIO/38° <i>MEDIUM/38°</i>	14W	1700 lm	1340 lm	220-240Vac 50/60Hz	I	66	07	>80
2113W/▲D35WB	LARGO/56° <i>WIDE/56°</i>	14W	1700 lm	1400 lm	220-240Vac 50/60Hz	I	66	07	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DALI-2 INTEGRATO - DALI-2 INTEGRATED


ACCESSORI

ACCESSORIES

KIT.032	KIT PICCHETTO PER PROIETTORE <i>FLOODLIGHT SPIKE KIT</i>	MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² <i>CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²</i>
AC2112	VISIERA ANTIABBAGLIAMENTO PER KUBO12 <i>ANTI-GLARE VISOR FOR KUBO12</i>	MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² <i>CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²</i>
KIT.036	BRACCIO PER ESTENSIONE A PARETE <i>EXTENSION ARM FOR WALL</i>	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² <i>CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²</i>
MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² <i>CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²</i>	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 <i>SURGE PROTECTOR CL I - IP67</i>

KUBO12-S HP

PROIETTORE ORIENTABILE HP
DRIVER INCORPORATO
ADJUSTABLE FLOODLIGHT HP
BUILT-IN DRIVER



CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
2123W/▲C50NB	STRETTO/15° <i>NARROW/15°</i>	20W	2700 lm	1900 lm	220-240Vac 50/60Hz	I	66	07	>80
2123W/▲C50MB	MEDIO/25° <i>MEDIUM/25°</i>	20W	2700 lm	1940 lm	220-240Vac 50/60Hz	I	66	07	>80
2123W/▲C50WB	LARGO/36° <i>WIDE/36°</i>	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	I	66	07	>80


VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS
 ON/OFF

ACCESSORI

ACCESSORIES

AC2112	VISIERA ANTIABBAGLIAMENTO PER KUBO12 <i>ANTI-GLARE VISOR FOR KUBO12</i>	MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM ² <i>CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²</i>
KIT.036	BRACCIO PER ESTENSIONE A PARETE <i>EXTENSION ARM FOR WALL</i>	MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM ² <i>CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²</i>
KIT.032	KIT PICCHETTO PER PROIETTORE <i>FLOODLIGHT SPIKE KIT</i>	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM ² <i>CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²</i>
MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM ² <i>CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM²</i>	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 <i>SURGE PROTECTOR CL I - IP67</i>

PROIETTORE ORIENTABILE HP DALI
DRIVER INCORPORATO
ADJUSTABLE FLOODLIGHT HP DALI
BUILT-IN DRIVER



CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
2123W/▲D50NB	 STRETTO/15° <i>NARROW/15°</i>	20W	2700 lm	1900 lm	220-240Vac 50/60Hz	I	66	07	>80
2123W/▲D50MB	 MEDIO/25° <i>MEDIUM/25°</i>	20W	2700 lm	1940 lm	220-240Vac 50/60Hz	I	66	07	>80
2123W/▲D50WB	 LARGO/36° <i>WIDE/36°</i>	20W	2700 lm	2000 lm	220-240Vac 50/60Hz	I	66	07	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DALI-2 INTEGRATO - DALI-2 INTEGRATED


ACCESSORI

ACCESSORIES

AC2112	VISIERA ANTIABBAGLIAMENTO PER KUBO12 <i>ANTI-GLARE VISOR FOR KUBO12</i>	MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM ² <i>CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²</i>
KIT.036	BRACCIO PER ESTENSIONE A PARETE <i>EXTENSION ARM FOR WALL</i>	MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM ² <i>CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²</i>
KIT.032	KIT PICCHETTO PER PROIETTORE <i>FLOODLIGHT SPIKE KIT</i>	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM ² <i>CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²</i>
MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM ² <i>CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²</i>	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 <i>SURGE PROTECTOR CL I - IP67</i>

KUBO12-S RGBW

RGBW

PROIETTORE ORIENTABILE RGBW**24VDC****ADJUSTABLE FLOODLIGHT RGBW****24VDC**

CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
2113W/RCRCNB	 STRETTO/10° <i>NARROW/10°</i>	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	66	07	RGBW
2113W/RCRCMB	 MEDIO/20° <i>MEDIUM/20°</i>	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	66	07	RGBW
2113W/RCRCWB	 LARGO/30° <i>WIDE/30°</i>	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	66	07	RGBW
2113W/RCRCSW	 MOLTO LARGO/60° <i>SUPER WIDE/60°</i>	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	66	07	RGBW

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

AC2112	VISIERA ANTIABBAGLIAMENTO PER KUBO12 <i>ANTI-GLARE VISOR FOR KUBO12</i>	E.TRA.579 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 <i>DRIVER ON/OFF 100W 24VDC IP67</i>
KIT.036	BRACCIO PER ESTENSIONE A PARETE <i>EXTENSION ARM FOR WALL</i>	E.TRA.592 1 DRIVER FOR 5-9 LAMPS	ALIMENTATORE ON/OFF ELG 240W 24VDC IP67 <i>DRIVER ON/OFF ELG 240W 24VDC IP67</i>
MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² <i>CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²</i>	E.CNT.001	TASTIERA RGBW 16DMX CH.12-24VDC <i>RGBW CONTROLLER 16DMX CH.12-24VDC</i>
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² <i>CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²</i>	E.CNT.002	TASTIERA RGBW 1024DMX CH.5-15VDC <i>RGBW CONTROLLER 1024DMX CH.5-15VDC</i>
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² <i>CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²</i>	E.TRA.594	SPLITTER DMX-RDM 2 CANALI <i>SPLITTER DMX-RDM 2 CHANNELS</i>
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² <i>CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²</i>		

ACCESSORI

ACCESSORIES

CONNETTORI

CONNECTORS



MOR685P/2V

Connettore IP68 5Poli/2Vie 5 x 2.5 mm²
Connector IP68 5Poles/2Ways 5 x 2.5 mm²
L 109 x Ø 31



MOR685P/3V

Connettore a Y IP68 5Poli/3Vie 5 x 2.5 mm²
Connector Y IP68 5Poles/3Ways 5 x 2.5 mm²
L 140 x W 72 x H 33



MOR685P/3VS

Scatola di connessione IP68 5Poli/3Vie 5 x 4 mm²
Connection Box IP68 5Poles/3Ways 5 x 4 mm²
L 127 x W 93 x H 35



MOR685P/4VS

Scatola di connessione IP68 5Poli/4Vie 5 x 4 mm²
Connection Box IP68 5Poles/4Ways 5 x 4 mm²
L 113 x W 93 x H 35

FISSAGGIO

FIXING



KIT.036

Braccio per estensione a parete
Extension arm for wall
L 500

VISIERE

VISORS



AC2112

Visiera antiabbagliamento per Kubo12
Anti-glare visor for Kubo12
L 125 x H 125

ALIMENTATORI 24Vdc

DRIVER 24Vdc



E.TRA.579

1 Driver for 1-4 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
L 140 x W 63 x H 32



E.TRA.592

1 Driver for 5-9 Lamps

Alimentatore ON/OFF ELG 240W 24Vdc IP67
Driver ON/OFF ELG 240W 24Vdc IP67
L 244 x W 71 x H 38

CENTRALINE RGBW

RGBW CONTROL UNITS



E.TRA.594

Splitter DMX-RDM 2 Canali
Splitter DMX-RDM 2 Channels
L 88 x W 54 x H 26

CONTROLLER TOUCH
TOUCH CONTROLLER





E.CNT.001

Tastiera RGBW 16DMX Ch. 12-24Vdc
 RGBW Controller 16DMX Ch. 12-24Vdc
 L 75 x W 29.5 x H 120



E.CNT.002

Tastiera RGBW 1024DMX Ch. 5-15Vdc
 RGBW Controller 1024DMX Ch. 5-15Vdc
 L 146 x W 10 x H 106

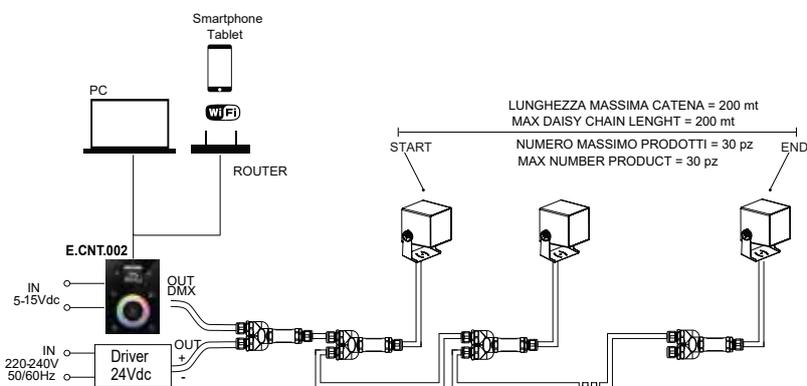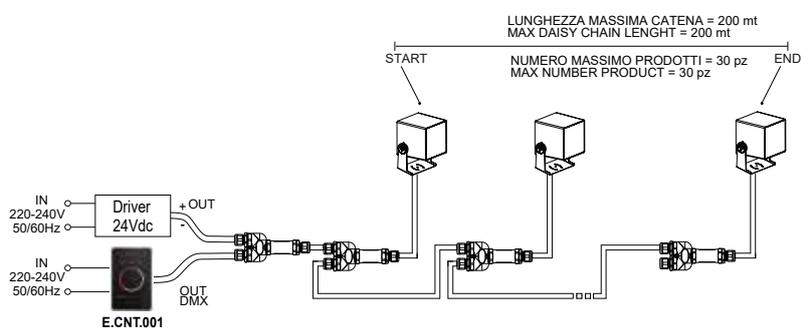



MATRIX MINI

Proiettore orientabile lineare
Adjustable linear floodlight

DESCRIZIONE *DESCRIZIONE*

Apparecchio orientabile lineare, adatto ad essere installato a parete, soffitto o a terra come proiettore stand-alone. Dotato di ottiche secondarie per diverse distribuzioni della luce, questa versione di Matrix è particolarmente adatta all'illuminazione radente su facciate di edifici, per risaltarne la consistenza materica, o per accentuare i dettagli architettonici di un edificio storico.

Adjustable linear floodlight, suitable for wall, ceiling or ground installation as a stand-alone floodlight. Equipped with secondary optics for different types of light distribution, this Matrix version is particularly suited for the oblique illumination of building façades, to highlight their texture or accentuate the architectural details of historical buildings.

INSTALLAZIONE *INSTALLATION*

Installazione a terra, parete o soffitto

Ground, wall or ceiling installation

CORPO *BODY*

Alluminio estruso

Extruded aluminium

SCHERMO *SCREEN*

Vetro extrachiaro temprato

Extra clear tempered glass

VITERIA *SCREWS*

Acciaio inox A2


Stainless steel A2

VERNICIATURA *FINISHING*

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder



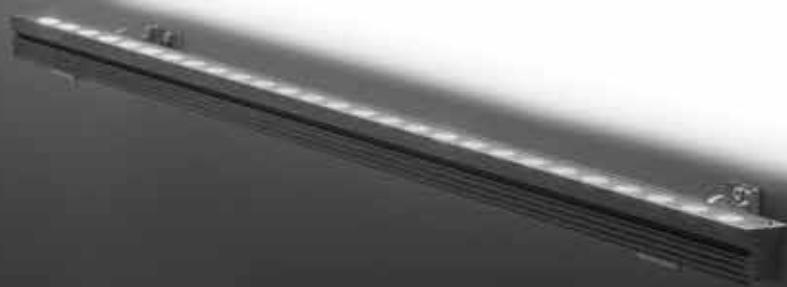







**CONFIG.
CODICE
CODE
CONFIG.**

▲ → **H=2700K
W=3000K
N=4000K**

**VERSIONE IN
TENSIONE
CONSTANT
VOLTAGE**

8W-16W CON DRIVER REMOTO 24Vdc
8W-16W REMOTE DRIVER 24Vdc




IP 67

IK 08



PROIETTORE LINEARE CON LENTI L. 530
24VDC
LINEAR FLOODLIGHT WITH LENS L. 530
24VDC

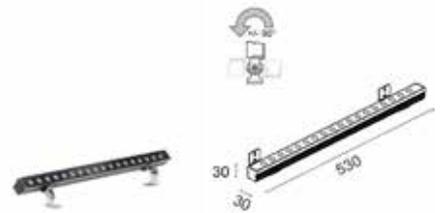

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2811P/▲PRCNB	STRETTO/20° NARROW/20°	8W	900 lm	785 lm	24Vdc	III	67	08	>80
2811P/▲PRCWB	LARGO/45° WIDE/45°	8W	900 lm	785 lm	24Vdc	III	67	08	>80
2811P/▲PRCOB	OVALE/20°X40° OVAL/20°X40°	8W	900 lm	785 lm	24Vdc	III	67	08	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 4 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 4 MM

DIMMERABILE - DIMMABLE

PROIETTORE LINEARE EMISSIONE DIFFUSA L. 530
24VDC
LINEAR FLOODLIGHT DIFFUSE EMISSION L. 530
24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2811P/▲RRCVS	DIFFUSO DIFFUSED	8W	1130 lm	280 lm	24Vdc	III	67	08	>80

VETRO EXTRACHIARO OPALE TEMPRATO 4 MM - EXTRA CLEAR OPAL TEMPERED GLASS 4 MM

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

F.PIA.463.530	VISIERA ANTIABBLAGIAMENTO PER MATRIX MINI ANTI-GLARE VISOR FOR MATRIX MINI	E.TRA.633 1 DRIVER FOR 1-10 LAMPS	ALIMENTATORE DALI 100W 24VDC IP67 DRIVER DALI 100W 24VDC IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.577 1 DRIVER FOR 1-2 LAMPS	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²	E.TRA.579 1 DRIVER FOR 3-10 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²	HUB.24V.001.ND 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF
E.TRA.631 1 DRIVER FOR 1 LAMP	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.DA2 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 DALI-2 HUB 70W 24VDC IP66 DALI-2
E.TRA.632 1 DRIVER FOR 1-8 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20	HUB.24V.001.CA 1 HUB FOR 1-8 LAMPS	HUB 70W 24VDC IP66 CASAMBI HUB 70W 24VDC IP66 CASAMBI

PROIETTORE LINEARE CON LENTI L. 780

24VDC

LINEAR FLOODLIGHT WITH LENS L. 780

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2812P/▲PRCNB	STRETTO/20° NARROW/20°	12W	1350 lm	1180 lm	24Vdc	III	67	08	>80
2812P/▲PRCWB	LARGO/45° WIDE/45°	12W	1350 lm	1180 lm	24Vdc	III	67	08	>80
2812P/▲PRCOB	OVALE/20°X40° OVAL/20°X40°	12W	1350 lm	1180 lm	24Vdc	III	67	08	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 4 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 4 MM

DIMMERABILE - DIMMABLE

PROIETTORE LINEARE EMISSIONE DIFFUSA L. 780

24VDC

LINEAR FLOODLIGHT DIFFUSE EMISSION L. 780

24VDC



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2812P/▲RRCVS	DIFFUSO DIFFUSED	12W	1700 lm	420 lm	24Vdc	III	67	08	>80

VETRO EXTRACHIARO OPALE TEMPRATO 4 MM - EXTRA CLEAR OPAL TEMPERED GLASS 4 MM


DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

F.PIA.463.780	VISIERA ANTIABBAGLIAMENTO PER MATRIX MINI ANTI-GLARE VISOR FOR MATRIX MINI	E.TRA.633 1 DRIVER FOR 1-7 LAMPS	ALIMENTATORE DALI 100W 24VDC IP67 DRIVER DALI 100W 24VDC IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²	E.TRA.577 1 DRIVER FOR 1 LAMP	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²	E.TRA.579 1 DRIVER FOR 2-7 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²	HUB.24V.001.ND 1 HUB FOR 1-5 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF
E.TRA.631 1 DRIVER FOR 1 LAMP	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20	HUB.24V.001.DA2 1 HUB FOR 1-5 LAMPS	HUB 70W 24VDC IP66 DALI-2 HUB 70W 24VDC IP66 DALI-2
E.TRA.632 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20	HUB.24V.001.CA 1 HUB FOR 1-5 LAMPS	HUB 70W 24VDC IP66 CASAMBI HUB 70W 24VDC IP66 CASAMBI

PROIETTORE LINEARE CON LENTI L. 1030
24VDC
LINEAR FLOODLIGHT WITH LENS L. 1030
24VDC

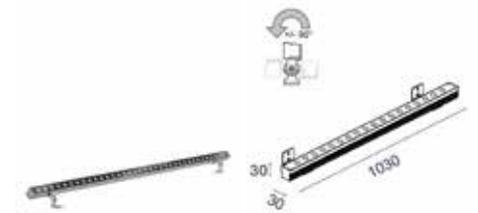


CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2813P/▲PRCNB	STRETTO/20° NARROW/20°	16W	1800 lm	1574 lm	24Vdc	III	67	08	>80
2813P/▲PRCWB	LARGO/45° WIDE/45°	16W	1800 lm	1574 lm	24Vdc	III	67	08	>80
2813P/▲PRCOB	OVALE/20°X40° OVAL/20°X40°	16W	1800 lm	1574 lm	24Vdc	III	67	08	>80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 4 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 4 MM

DIMMERABILE - DIMMABLE

PROIETTORE LINEARE EMISSIONE DIFFUSA L. 1030
24VDC
LINEAR FLOODLIGHT DIFFUSE EMISSION L. 1030
24VDC

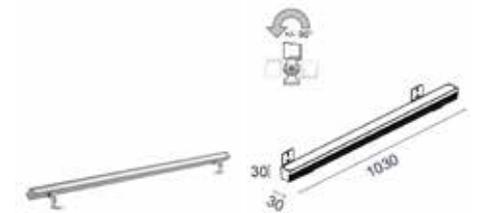

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2813P/▲RRCVS	DIFFUSO DIFFUSED	16W	2260 lm	560 lm	24Vdc	III	67	08	>80

VETRO EXTRACHIARO OPALE TEMPRATO 4 MM - EXTRA CLEAR OPAL TEMPERED GLASS 4 MM

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

F.PIA.463.1030	VISIERA ANTIABBLAGLIAMENTO PER MATRIX MINI ANTI-GLARE VISOR FOR MATRIX MINI		E.TRA.633 1 DRIVER FOR 1-5 LAMPS	ALIMENTATORE DALI 100W 24VDC IP67 DRIVER DALI 100W 24VDC IP67
MOR682P/2V	CONNETTORE IP68 2POLI/2VIE 2 X 1 MM² CONNECTOR IP68 2POLES/2WAYS 2 X 1 MM²		E.TRA.577 1 DRIVER FOR 1 LAMP	ALIMENTATORE ON/OFF 25W 24VDC IP67 DRIVER ON/OFF 25W 24VDC IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²		E.TRA.579 1 DRIVER FOR 2-5 LAMPS	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²		HUB.24V.001.ND 1 HUB FOR 1-4 LAMPS	HUB 70W 24VDC IP66 ON/OFF HUB 70W 24VDC IP66 ON/OFF
E.TRA.631 1 DRIVER FOR 1 LAMP	ALIMENTATORE ON/OFF 15W 24VDC IP20 DRIVER ON/OFF 15W 24VDC IP20		HUB.24V.001.DA2 1 HUB FOR 1-4 LAMPS	HUB 70W 24VDC IP66 DALI-2 HUB 70W 24VDC IP66 DALI-2
E.TRA.632 1 DRIVER FOR 1-4 LAMPS	ALIMENTATORE ON/OFF 70W 24VDC IP20 DRIVER ON/OFF 70W 24VDC IP20		HUB.24V.001.CA 1 HUB FOR 1-4 LAMPS	HUB 70W 24VDC IP66 CASAMBI HUB 70W 24VDC IP66 CASAMBI

ACCESSORI ACCESSORIES

CONNETTORI

CONNECTORS



MOR682P/2V

Connettore IP68 2Poli/2Vie 2 x 1 mm²
Connector IP68 2Poles/2Ways 2 x 1 mm²
L 72 x Ø 22



MOR685P/3VS

Scatola di connessione IP68 5Poli/3Vie 5 x 4 mm²
Connection Box IP68 5Poles/3Ways 5 x 4 mm²
L 127 x W 93 x H 35



MOR685P/4VS

Scatola di connessione IP68 5Poli/4Vie 5 x 4 mm²
Connection Box IP68 5Poles/4Ways 5 x 4 mm²
L 113 x W 93 x H 35

VISIERE

VISORS



F.PIA.463.1030

Visiera antiabbagliamento per Matrix Mini
Anti-glare visor for Matrix Mini
L 1030



F.PIA.463.530

Visiera antiabbagliamento per Matrix Mini
Anti-glare visor for Matrix Mini
L 530




F.PIA.463.780

Visiera antiabbagliamento per Matrix Mini
Anti-glare visor for Matrix Mini
L 780

ALIMENTATORI 24Vdc

DRIVER 24Vdc



E.TRA.577

Cod. 2811P - 1 Driver for 1-2 Lamps
Cod. 2812P - 1 Driver for 1 Lamp
Cod. 2813P - 1 Driver for 1 Lamp

Alimentatore ON/OFF 25W 24Vdc IP67
Driver ON/OFF 25W 24Vdc IP67
L 148 x W 40 x H 32



E.TRA.579

Cod. 2811P - 1 Driver for 3-10 Lamps
Cod. 2812P - 1 Driver for 2-7 Lamps
Cod. 2813P - 1 Driver for 2-5 Lamps

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67
L 140 x W 63 x H 32



E.TRA.631

Cod. 2811P - 1 Driver for 1 Lamp
Cod. 2812P - 1 Driver for 1 Lamp
Cod. 2813P - 1 Driver for 1 Lamp

Alimentatore ON/OFF 15W 24Vdc IP20
Driver ON/OFF 15W 24Vdc IP20
L 106 x W 33 x H 22



E.TRA.632

Cod. 2811P - 1 Driver for 1-8 Lamps
Cod. 2812P - 1 Driver for 1-5 Lamps
Cod. 2813P - 1 Driver for 1-4 Lamps

Alimentatore ON/OFF 70W 24Vdc IP20
Driver ON/OFF 70W 24Vdc IP20
L 124 x W 80 x H 22



E.TRA.633

Cod. 2811P - 1 Driver for 1-10 Lamps
Cod. 2812P - 1 Driver for 1-7 Lamps
Cod. 2813P - 1 Driver for 1-5 Lamps

Alimentatore DALI 100W 24Vdc IP67
Driver DALI 100W 24Vdc IP67
L 175 x W 63 x H 36

HUB - SISTEMI DI CONNESSIONE SEMPLIFICATA 24Vdc*HUB - READY TO CONNECT SYSTEM 24Vdc***HUB.24V.001.ND**

Cod. 2811R - 1 Driver for 1-8 Lamps
 Cod. 2812R - 1 Driver for 1-5 Lamps
 Cod. 2813R - 1 Driver for 1-4 Lamps

Hub 70W 24Vdc IP66 ON/OFF

Hub 70W 24Vdc IP66 ON/OFF

L 235 x W 200 x H 92

**HUB.24V.001.DA2**

Cod. 2811R - 1 Driver for 1-8 Lamps
 Cod. 2812R - 1 Driver for 1-5 Lamps
 Cod. 2813R - 1 Driver for 1-4 Lamps

Hub 70W 24Vdc IP66 DALI-2

Hub 70W 24Vdc IP66 DALI-2

L 235 x W 200 x H 92


**HUB.24V.001.CA**

Cod. 2811R - 1 Driver for 1-8 Lamps
 Cod. 2812R - 1 Driver for 1-5 Lamps
 Cod. 2813R - 1 Driver for 1-4 Lamps

Hub 70W 24Vdc IP66 CASAMBI

Hub 70W 24Vdc IP66 CASAMBI

L 235 x W 200 x H 92

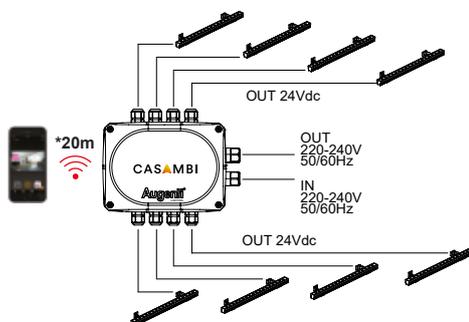



MATRIX

Proiettore orientabile lineare
Adjustable linear floodlight

DESCRIZIONE *DESCRIZIONE*

Apparecchio orientabile lineare, adatto ad essere installato a parete, soffitto o a terra come proiettore stand-alone. Dotato di ottiche secondarie per diverse distribuzioni della luce, questa versione di Matrix è particolarmente adatta all'illuminazione radente su facciate di edifici, per risaltarne la consistenza materica, o per accentuare i dettagli architettonici di un edificio storico. Disponibile anche la versione RGBW.

Adjustable linear floodlight, suitable for wall, ceiling or ground installation as a stand-alone floodlight. Equipped with secondary optics for different types of light distribution, this Matrix version is particularly suited for the oblique illumination of building façades, to highlight their texture or accentuate the architectural details of historical buildings. RGBW version also available.

INSTALLAZIONE *INSTALLATION*

Installazione a terra, parete o soffitto

Ground, wall or ceiling installation

CORPO *BODY*

Alluminio estruso

Extruded aluminium

SCHERMO *SCREEN*

Vetro extrachiaro temprato

Extra clear tempered glass

VITERIA *SCREWS*

Acciaio inox A2

Stainless steel A2

VERNICIATURA *FINISHING*

Polvere poliestere stabilizzata ai raggi UV con trattamento anticorrosione

Anti-corrosive UV stabilized polyester powder











**CONFIG.
CODICE
CODE
CONFIG.**

▲ → **H=2700K
W=3000K
N=4000K**

ALIMENTAZIONE
INPUT SUPPLY

220-240VAC 50/60HZ
220-240VAC 50/60HZ



IP 67


IK 07



MATRIX FLOODLIGHT

PROIETTORE LINEARE CON LENTI L. 306

LINEAR FLOODLIGHT WITH LENS L. 306




CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2800P/▲P50.NB	 STRETTO/12° NARROW/12°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	07	80
2800P/▲P50.MB	 MEDIO/28° MEDIUM/28°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	07	80
2800P/▲P50.WB	 LARGO/50° WIDE/50°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	07	80
2800P/▲P50.OB	 OVALE/42°X12° OVAL/42°X12°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 5 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 5 MM

ON/OFF

PROIETTORE LINEARE EMISSIONE DIFFUSA L. 306

LINEAR FLOODLIGHT DIFFUSE EMISSION L. 306



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2800P/▲R50VS	 DIFFUSO DIFFUSED	8W	870 lm	339 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO OPALE TEMPRATO 5 MM - EXTRA CLEAR OPAL TEMPERED GLASS 5 MM

ON/OFF


ACCESSORI

ACCESSORIES

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM ² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM ²	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM ² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM ²
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM ² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM ²	ETRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM ² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM ²		

PROIETTORE LINEARE DALI CON LENTI L. 306

LINEAR FLOODLIGHT DALI WITH LENS L. 306

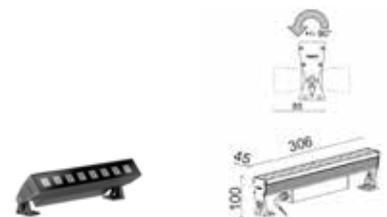


CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2800P/▲D50.NB	STRETTO/12° NARROW/12°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	07	80
2800P/▲D50.MB	MEDIO/28° MEDIUM/28°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	07	80
2800P/▲D50.WB	LARGO/50° WIDE/50°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	07	80
2800P/▲D50.OB	OVALE/42°X12° OVAL/42°X12°	14W	1452 lm	1220 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 5 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 5 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

PROIETTORE LINEARE DALI EMISSIONE DIFFUSA L. 306

LINEAR FLOODLIGHT DALI DIFFUSE EMISSION L. 306

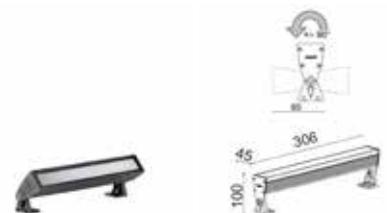

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2800P/▲D50VS	DIFFUSO DIFFUSED	8W	870 lm	339 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO OPALE TEMPRATO 5 MM - EXTRA CLEAR OPAL TEMPERED GLASS 5 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

ACCESSORI

ACCESSORIES


MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM ² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM ²	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM ² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM ²
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM ² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM ²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL1 - IP67 SURGE PROTECTOR CL1 - IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM ² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM ²		

PROIETTORE LINEARE CON LENTI L. 586**LINEAR FLOODLIGHT WITH LENS L. 586**

CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
2801P/▲P50.NB	STRETTO/12° NARROW/12°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	07	80
2801P/▲P50.MB	MEDIO/28° MEDIUM/28°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	07	80
2801P/▲P50.WB	LARGO/50° WIDE/50°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	07	80
2801P/▲P50.OB	OVALE/42°X12° OVAL/42°X12°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 5 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 5 MM

ON/OFF

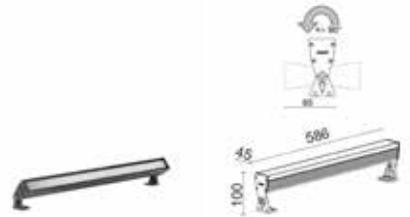PROIETTORE LINEARE EMISSIONE DIFFUSA L. 586**LINEAR FLOODLIGHT DIFFUSE EMISSION L. 586**

CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
2801P/▲R50VS	DIFFUSO DIFFUSED	14W	1740 lm	678 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO OPALE TEMPRATO 5 MM - EXTRA CLEAR OPAL TEMPERED GLASS 5 MM

ON/OFF

ACCESSORI**ACCESSORIES**

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM ² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM ²	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM ² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM ²
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM ² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM ²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM ² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM ²		

PROIETTORE LINEARE DALI CON LENTI L. 586

LINEAR FLOODLIGHT DALI WITH LENS L. 586




CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2801P/▲D50.NB	STRETTO/12° NARROW/12°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	07	80
2801P/▲D50.MB	MEDIO/28° MEDIUM/28°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	07	80
2801P/▲D50.WB	LARGO/50° WIDE/50°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	07	80
2801P/▲D50.OB	OVALE/42°X12° OVAL/42°X12°	26W	2905 lm	2440 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 5 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 5 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

PROIETTORE LINEARE DALI EMISSIONE DIFFUSA L. 586

LINEAR FLOODLIGHT DALI DIFFUSE EMISSION L. 586

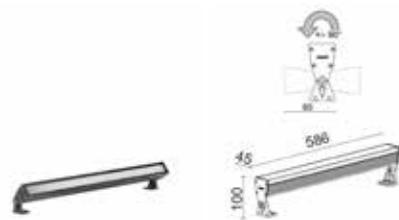

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2801P/▲D50VS	DIFFUSO DIFFUSED	14W	1740 lm	678 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO OPALE TEMPRATO 5 MM - EXTRA CLEAR OPAL TEMPERED GLASS 5 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

ACCESSORI

ACCESSORIES


MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM ² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM ²	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM ² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM ²
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM ² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM ²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM ² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM ²		

PROIETTORE LINEARE CON LENTI L. 866**LINEAR FLOODLIGHT WITH LENS L. 866**

CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
2802P/▲P50.NB	STRETTO/12° <i>NARROW/12°</i>	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	07	80
2802P/▲P50.MB	MEDIO/28° <i>MEDIUM/28°</i>	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	07	80
2802P/▲P50.WB	LARGO/50° <i>WIDE/50°</i>	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	07	80
2802P/▲P50.OB	OVALE/42°X12° <i>OVAL/42°X12°</i>	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 5 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 5 MM

ON/OFF

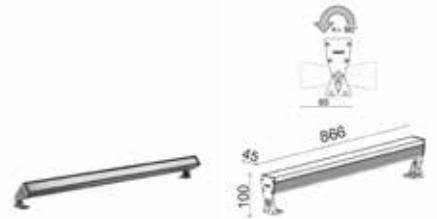PROIETTORE LINEARE EMISSIONE DIFFUSA L. 866**LINEAR FLOODLIGHT DIFFUSE EMISSION L. 866**

CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
2802P/▲R50VS	DIFFUSO <i>DIFFUSED</i>	20W	2610 lm	1020 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO OPALE TEMPRATO 5 MM - EXTRA CLEAR OPAL TEMPERED GLASS 5 MM

ON/OFF

ACCESSORI**ACCESSORIES**

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM ² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM ²	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM ² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM ²
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM ² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM ²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM ² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM ²		

PROIETTORE LINEARE DALI CON LENTI L. 866

LINEAR FLOODLIGHT DALI WITH LENS L. 866




CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
2802P/▲D50.NB	STRETTO/12° <i>NARROW/12°</i>	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	07	80
2802P/▲D50.MB	MEDIO/28° <i>MEDIUM/28°</i>	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	07	80
2802P/▲D50.WB	LARGO/50° <i>WIDE/50°</i>	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	07	80
2802P/▲D50.OB	OVALE/42°X12° <i>OVAL/42°X12°</i>	42W	4357 lm	3660 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 5 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 5 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

PROIETTORE LINEARE DALI EMISSIONE DIFFUSA L. 866

LINEAR FLOODLIGHT DALI DIFFUSE EMISSION L. 866

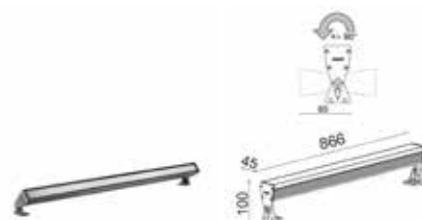

CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
2802P/▲D50VS	DIFFUSO <i>DIFFUSED</i>	20W	2610 lm	1020 lm	220-240Vac 50/60Hz	I	67	07	80


VETRO EXTRACHIARO OPALE TEMPRATO 5 MM - EXTRA CLEAR OPAL TEMPERED GLASS 5 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

ACCESSORI

ACCESSORIES


MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM ² <i>CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²</i>	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM ² <i>CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²</i>
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM ² <i>CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²</i>	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 <i>SURGE PROTECTOR CL I - IP67</i>
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM ² <i>CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²</i>		

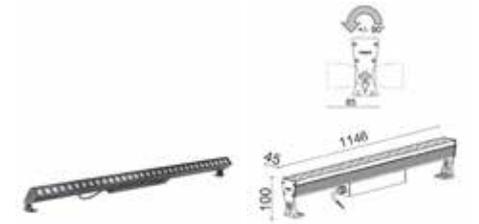PROIETTORE LINEARE CON LENTI L. 1146**LINEAR FLOODLIGHT WITH LENS L. 1146**

CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
2803P/▲P50.NB	STRETTO/12° <i>NARROW/12°</i>	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	07	80
2803P/▲P50.MB	MEDIO/28° <i>MEDIUM/28°</i>	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	07	80
2803P/▲P50.WB	LARGO/50° <i>WIDE/50°</i>	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	07	80
2803P/▲P50.OB	OVALE/42°X12° <i>OVAL/42°X12°</i>	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 5 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 5 MM

ON/OFF

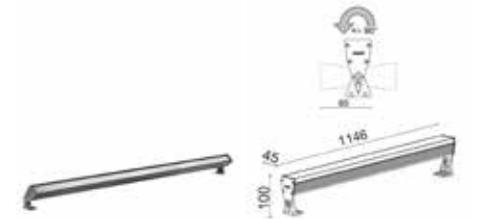PROIETTORE LINEARE EMISSIONE DIFFUSA L. 1146**LINEAR FLOODLIGHT DIFFUSE EMISSION L. 1146**

CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
2803P/▲R50VS	DIFFUSO <i>DIFFUSED</i>	26W	3480 lm	1355 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO OPALE TEMPRATO 5 MM - EXTRA CLEAR OPAL TEMPERED GLASS 5 MM

ON/OFF

ACCESSORI**ACCESSORIES**

MOR683P/2V	CONNETTORE IP68 3POLI/2VIE 3 X 2.5 MM ² CONNECTOR IP68 3POLES/2WAYS 3 X 2.5 MM ²	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM ² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM ²
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM ² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM ²	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 SURGE PROTECTOR CL I - IP67
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM ² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM ²		

PROIETTORE LINEARE DALI CON LENTI L. 1146

LINEAR FLOODLIGHT DALI WITH LENS L. 1146




CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
2803P/▲D50.NB	STRETTO/12° <i>NARROW/12°</i>	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	07	80
2803P/▲D50.MB	MEDIO/28° <i>MEDIUM/28°</i>	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	07	80
2803P/▲D50.WB	LARGO/50° <i>WIDE/50°</i>	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	07	80
2803P/▲D50.OB	OVALE/42°X12° <i>OVAL/42°X12°</i>	54W	5810 lm	4880 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO TRASPARENTE TEMPRATO 5 MM - EXTRA CLEAR TRANSPARENT TEMPERED GLASS 5 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

PROIETTORE LINEARE DALI EMISSIONE DIFFUSA L. 1146

LINEAR FLOODLIGHT DALI DIFFUSE EMISSION L. 1146

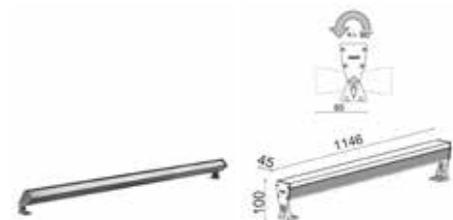

CODICE <i>CODE</i>	FASCIO <i>BEAM</i>	WATT	SORGENTE <i>SOURCE</i>	APPARECCHIO <i>FIXTURE</i>	ALIMENTAZIONE <i>POWER SUPPLY</i>	CL	IP	IK	CRI
2803P/▲D50VS	DIFFUSO <i>DIFFUSED</i>	26W	3480 lm	1355 lm	220-240Vac 50/60Hz	I	67	07	80

VETRO EXTRACHIARO OPALE TEMPRATO 5 MM - EXTRA CLEAR OPAL TEMPERED GLASS 5 MM

DALI-2 INTEGRATO - DALI-2 INTEGRATED

ACCESSORI

ACCESSORIES


MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM ² <i>CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²</i>	MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM ² <i>CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²</i>
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM ² <i>CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²</i>	E.TRA.580	LIMITATORE DI SOVRATENSIONE CL I - IP67 <i>SURGE PROTECTOR CL I - IP67</i>
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM ² <i>CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²</i>		

MATRIX FLOODLIGHT RGBW

PROIETTORE LINEARE RGBW L. 306

LINEAR FLOODLIGHT RGBW L. 306

RGBW



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2800P/RCRC.MB	MEDIO/24° MEDIUM/24°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	67	07	RGBW
2800P/RCRC.WB	LARGO/35° WIDE/35°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	67	07	RGBW
2800P/RCRC.SW	MOLTO LARGO/54° SUPER WIDE/54°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	67	07	RGBW
2800P/RCRC.O4	OVALE/40°X20° OVAL/40°X20°	12W with Algorithm	1650 lm	1420 lm	24Vdc	III	67	07	RGBW


VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DIMMERABILE - DIMMABLE

PROIETTORE LINEARE RGBW L. 586

LINEAR FLOODLIGHT RGBW L. 586

RGBW



CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2801P/RCRC.MB	MEDIO/24° MEDIUM/24°	24W with Algorithm	3300 lm	2840 lm	24Vdc	III	67	07	RGBW
2801P/RCRC.WB	LARGO/35° WIDE/35°	24W with Algorithm	3300 lm	2840 lm	24Vdc	III	67	07	RGBW
2801P/RCRC.SW	MOLTO LARGO/54° SUPER WIDE/54°	24W with Algorithm	3300 lm	2840 lm	24Vdc	III	67	07	RGBW
2801P/RCRC.O4	OVALE/40°X20° OVAL/40°X20°	24W with Algorithm	3300 lm	2840 lm	24Vdc	III	67	07	RGBW

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DIMMERABILE - DIMMABLE


ACCESSORI

ACCESSORIES

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM ² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM ²	E.TRA.592	ALIMENTATORE ON/OFF ELG 240W 24VDC IP67 DRIVER ON/OFF ELG 240W 24VDC IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM ² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM ²	E.CNT.001	TASTIERA RGBW 16DMX CH.12-24VDC RGBW CONTROLLER 16DMX CH.12-24VDC
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM ² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM ²	E.CNT.002	TASTIERA RGBW 1024DMX CH. 5-15VDC RGBW CONTROLLER 1024DMX CH. 5-15VDC
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM ² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM ²	E.TRA.594	SPLITTER DMX-RDM 2 CANALI SPLITTER DMX-RDM 2 CHANNELS
E.TRA.579	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67		

PROIETTORE LINEARE RGBW L. 866

LINEAR FLOODLIGHT RGBW L. 866

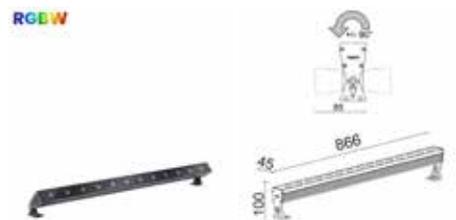


CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2802P/RCRC.MB	MEDIO/24° MEDIUM/24°	36W with Algorithm	4950 lm	4260 lm	24Vdc	III	67	07	RGBW
2802P/RCRC.WB	LARGO/35° WIDE/35°	36W with Algorithm	4950 lm	4260 lm	24Vdc	III	67	07	RGBW
2802P/RCRC.SW	MOLTO LARGO/54° SUPER WIDE/54°	36W with Algorithm	4950 lm	4260 lm	24Vdc	III	67	07	RGBW
2802P/RCRC.O4	OVALE/40°X20° OVAL/40°X20°	36W with Algorithm	4950 lm	4260 lm	24Vdc	III	67	07	RGBW

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DIMMERABILE - DIMMABLE

PROIETTORE LINEARE RGBW L.1146

LINEAR FLOODLIGHT RGBW L.1146

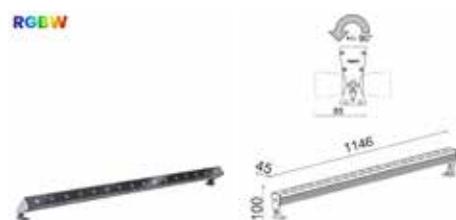

CODICE CODE	FASCIO BEAM	WATT	SORGENTE SOURCE	APPARECCHIO FIXTURE	ALIMENTAZIONE POWER SUPPLY	CL	IP	IK	CRI
2803P/RCRC.MB	MEDIO/24° MEDIUM/24°	48W with Algorithm	6600 lm	5680 lm	24Vdc	III	67	07	RGBW
2803P/RCRC.WB	LARGO/35° WIDE/35°	48W with Algorithm	6600 lm	5680 lm	24Vdc	III	67	07	RGBW
2803P/RCRC.SW	MOLTO LARGO/54° SUPER WIDE/54°	48W with Algorithm	6600 lm	5680 lm	24Vdc	III	67	07	RGBW
2803P/RCRC.O4	OVALE/40°X20° OVAL/40°X20°	48W with Algorithm	6600 lm	5680 lm	24Vdc	III	67	07	RGBW

VETRO EXTRACHIARO TRASPARENTE TEMPRATO - EXTRA CLEAR TRANSPARENT TEMPERED GLASS

DIMMERABILE - DIMMABLE

ACCESSORI

ACCESSORIES

MOR685P/2V	CONNETTORE IP68 5POLI/2VIE 5 X 2.5 MM² CONNECTOR IP68 5POLES/2WAYS 5 X 2.5 MM²	E.TRA.592	ALIMENTATORE ON/OFF ELG 240W 24VDC IP67 DRIVER ON/OFF ELG 240W 24VDC IP67
MOR685P/3V	CONNETTORE A Y IP68 5POLI/3VIE 5 X 2.5 MM² CONNECTOR Y IP68 5POLES/3WAYS 5 X 2.5 MM²	E.CNT.001	TASTIERA RGBW 16DMX CH.12-24VDC RGBW CONTROLLER 16DMX CH.12-24VDC
MOR685P/3VS	SCATOLA DI CONNESSIONE IP68 5POLI/3VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/3WAYS 5 X 4 MM²	E.CNT.002	TASTIERA RGBW 1024DMX CH. 5-15VDC RGBW CONTROLLER 1024DMX CH. 5-15VDC
MOR685P/4VS	SCATOLA DI CONNESSIONE IP68 5POLI/4VIE 5 X 4 MM² CONNECTION BOX IP68 5POLES/4WAYS 5 X 4 MM²	E.TRA.594	SPLITTER DMX-RDM 2 CANALI SPLITTER DMX-RDM 2 CHANNELS
E.TRA.579	ALIMENTATORE ON/OFF 100W 24VDC IP67 DRIVER ON/OFF 100W 24VDC IP67		

ACCESSORI ACCESSORIES

CONNETTORI

CONNECTORS



MOR685P/2V

Connettore IP68 5Poli/2Vie 5 x 2.5 mm²
Connector IP68 5Poles/2Ways 5 x 2.5 mm²
L 109 x Ø 31



MOR685P/3V

Connettore a Y IP68 5Poli/3Vie 5 x 2.5 mm²
Connector Y IP68 5Poles/3Ways 5 x 2.5 mm²
L 140 x W 72 x H 33



MOR685P/3VS

Scatola di connessione IP68 5Poli/3Vie 5 x 4 mm²
Connection Box IP68 5Poles/3Ways 5 x 4 mm²
L 127 x W 93 x H 35



MOR685P/4VS

Scatola di connessione IP68 5Poli/4Vie 5 x 4 mm²
Connection Box IP68 5Poles/4Ways 5 x 4 mm²
L 113 x W 93 x H 35

ALIMENTATORI 24Vdc

DRIVER 24Vdc



E.TRA.579

Cod. 2800P - 1 Driver for 1-4 Lamps
Cod. 2801P - 1 Driver for 1-2 Lamps
Cod. 2802P - 1 Driver for 1 Lamp
Cod. 2803P - 1 Driver for 1 Lamp

Alimentatore ON/OFF 100W 24Vdc IP67
Driver ON/OFF 100W 24Vdc IP67

L 140 x W 63 x H 32



E.TRA.592

Cod. 2800P - 1 Driver for 5-9 Lamps
Cod. 2801P - 1 Driver for 3-5 Lamps
Cod. 2802P - 1 Driver for 2-3 Lamps
Cod. 2803P - 1 Driver for 1 Lamp

Alimentatore ON/OFF ELG 240W 24Vdc IP67

Driver ON/OFF ELG 240W 24Vdc IP67

L 244 x W 71 x H 38

CENTRALINE RGBW

RGBW CONTROL UNITS



E.TRA.594

Splitter DMX-RDM 2 Canali

Splitter DMX-RDM 2 Channels

L 88 x W 54 x H 26

CONTROLLER TOUCH

TOUCH CONTROLLER



E.CNT.001

Tastiera RGBW 16DMX Ch. 12-24Vdc

RGBW Controller 16DMX Ch. 12-24Vdc

L 75 x W 29.5 x H 120



E.CNT.002

Tastiera RGBW 1024DMX Ch. 5-15Vdc

RGBW Controller 1024DMX Ch. 5-15Vdc

L 146 x W 10 x H 106

