

Outdoor Lighting / Éclairage Extérieur  
**Floodlights**  
 Projecteurs



182

**IVO PRI**

100lm/W  
 actual/réels

IP65



184

**IVO PRI**

BL

NE



186

**IVO SENSOR PRIS**



NEW

187

**IVO SOLAR SPRI**



NEW



188

RGB + 3000K - 6500K

**IVO RGB+TW PRIB**

190

**IPROY IPRN**

ECO

BL

NE

IP65

100lm/W  
 actual/réels



OUTDOOR / EXTÉRIEUR

ECO IVO PRI



High brightness LED  
LED haute luminosité

Polycarbonate reflector  
Réflecteur en polycarbonate

Stainless screw  
Boulonnerie en acier inoxydable

Tempered glass  
Verre trempé

SPCC Bracket  
Poignée en acier SPCC



IP65

Made of aluminium alloy ADC12.  
Fabriqué en alliage d'aluminium ADC12.



Anti-condensation valve  
Soupape de dépression anticondensation



Its aluminium body allows a perfect heat management  
Son corps en aluminium permet une dissipation parfaite



ECO IVO SENSOR PRIS



Internal Motion sensor  
Détecteur de mouvement interne

Remote control included  
Commande incluse

ECO IVO SOLAR SPRI



Bracket included  
Poignée incluse



LiFePO4



Replaceable Battery  
Batterie remplaçable

Remote control included  
Commande incluse

ECO IVO RGB+TW PRIB




PRIB  
30 W

RGB + 3000K - 6500K

Remote control included  
Commande incluse

# IVO

ECO PRI010 / PRI020 / PRI030 / PRI050

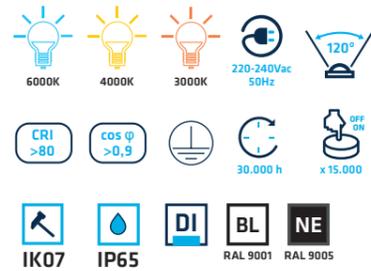

• Material




• Certif.



100 actual lm/W  
100 lm/W réels

	A	B	C
PRI010	125	95	47
PRI020	160	120	49
PRI030	225	160	58
PRI050	250	180	58




Measures (mm).

III III	K	W	Beam	Beam
PRI010601202	6000K	10 W	1100 lm	900 lm
PRI010401202	4000K	10 W	1100 lm	900 lm
PRI010301202	3000K	10 W	1070 lm	850 lm
PRI010401200	4000K	10 W	1100 lm	900 lm
PRI020601202	6000K	20 W	2400 lm	2000 lm
PRI020401202	4000K	20 W	2400 lm	2000 lm
PRI020301202	3000K	20 W	2300 lm	1900 lm
PRI020401200	4000K	20 W	2400 lm	2000 lm
PRI030601202	6000K	30 W	3600 lm	3000 lm
PRI030401202	4000K	30 W	3600 lm	3000 lm
PRI030301202	3000K	30 W	3510 lm	2850 lm
PRI030401200	4000K	30 W	3600 lm	3000 lm
PRI050601202	6000K	50 W	6000 lm	5000 lm
PRI050401202	4000K	50 W	6000 lm	5000 lm
PRI050301202	3000K	50 W	5850 lm	4750 lm
PRI050401200	4000K	50 W	6000 lm	5000 lm

# IVO

ECO PRI100 / PRI150 / PRI200

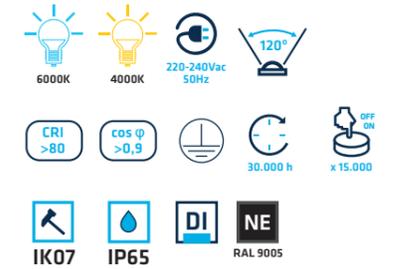

• Material




• Certif.



100 actual lm/W  
100 lm/W réels

	A	B	C
PRI100	295	228	58
PRI150	370	288	58
PRI200	453	358	61

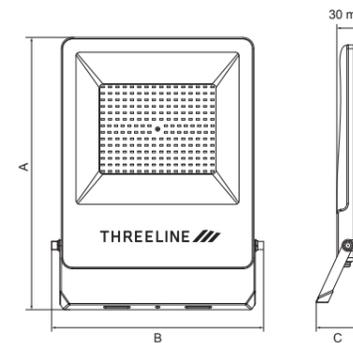

Measures (mm).

III III	K	W	Beam	Beam
PRI100601202	6000K	100 W	12000 lm	10000 lm
PRI100401202	4000K	100 W	12000 lm	10000 lm
PRI150601202	6000K	150 W	18000 lm	15000 lm
PRI150401202	4000K	150 W	18000 lm	15000 lm
PRI200601202	6000K	200 W	28000 lm	24000 lm
PRI200401202	4000K	200 W	28000 lm	24000 lm

## IVO SENSOR

- ECO PRIS
- 6000K 4000K
- 220-240Vac 50Hz
- 120°
- CRI >80
- COS φ >0,9
- 30.000 h x 15.000
- IP65 IK07
- DI NE RAL 9005

• Material

- V AL
- DIFFUSER BODY

• Included


- INTERNAL MOTION SENSOR
- REMOTE CONTROL
- 1m CABLE

• Certif.



INTERNAL MOTION SENSOR  
CAPTEUR DE MOUVEMENT INTERNE

	A	B	C
PRIS20	160	120	49
PRIS30	225	160	58
PRIS50	250	180	58



Measures (mm).

III	K	☑	W	☀	☀
PRIS20401202	6000K	■	20 W	2400 lm	2000 lm
PRIS20601202	4000K	■	20 W	2400 lm	2000 lm
PRIS30401202	6000K	■	30 W	3600 lm	3000 lm
PRIS30601202	4000K	■	30 W	3600 lm	3000 lm
PRIS50401202	6000K	■	50 W	6000 lm	5000 lm
PRIS50601202	4000K	■	50 W	6000 lm	5000 lm

## IVO SOLAR

- ECO SPRI
- 6000K 4000K
- 120°
- LiFePO4
- CRI >80
- 30.000 h x 15.000
- IP65 IK07
- DI NE RAL 9005

• Material

- V AL
- DIFFUSER BODY


• Solar Pan. Mat.

- Si
- SINGLE-CRYSTAL

• Certif.



100 actual lm/W  
100 lm/W réels

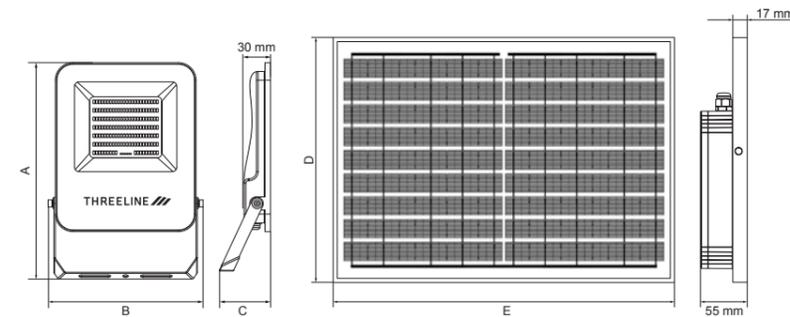

	A	B	C	D	E
SPRI20	160	120	49	209	304
SPRI30	225	160	58	214	344
SPRI50	250	180	58	284	394

Measures (mm).

☀	SOLAR PANEL			
	V	W	Work Time	Charging Time
SPRI20	9	8	7-9 H	6-8 H
SPRI30	9	10	7-9 H	4-6 H
SPRI50	9	15	7-9 H	4-6 H

III	K	☑	W	☀	☀
SPRI20601202	6000K	■	20 W	2400 lm	2000 lm
SPRI20401202	4000K	■	20 W	2400 lm	2000 lm
SPRI30601202	6000K	■	30 W	3600 lm	3000 lm
SPRI30401202	4000K	■	30 W	3600 lm	3000 lm
SPRI50601202	6000K	■	50 W	6000 lm	5000 lm
SPRI50401202	4000K	■	50 W	6000 lm	5000 lm

# IVO RGB+TW

eco **PRIB**

RGB + 3000K - 6500K

220-240Vac 50Hz

120°

CRI >80

COS φ >0,9

30.000 h

x 20.000

IP65

IK07

DI

NE RAL 9005

• Material

V AL



DIFFUSER BODY

• Included

REMOTE CONTROL

1m CABLE

• Certif.

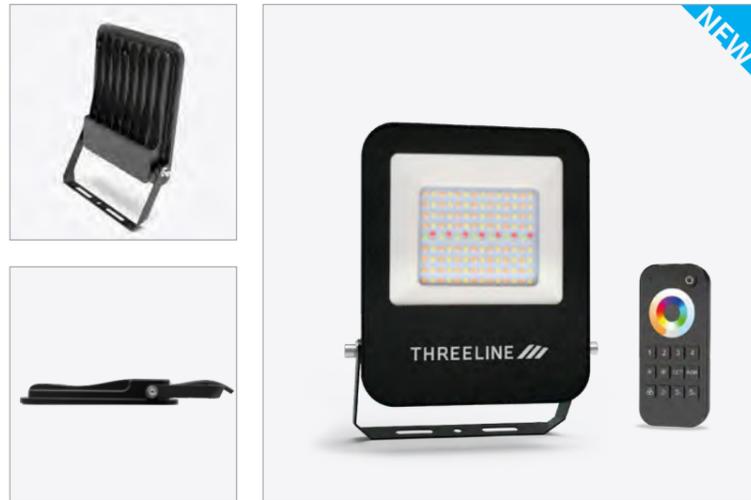

	A	B	C
PRIB30	225	160	58

Measures (mm).

III III	CCT	W	Beam
PRIB30RGB	RGB + 3000K ~ 6000K	30 W	2850 lm ~ 3600 lm / 2400 lm ~ 3000 lm



OUTDOOR / EXTÉRIEUR



# IPROY


ECO IPRN10W / IPRN20W  
IPRN30W / IPRN50W



• Material




• Certif.

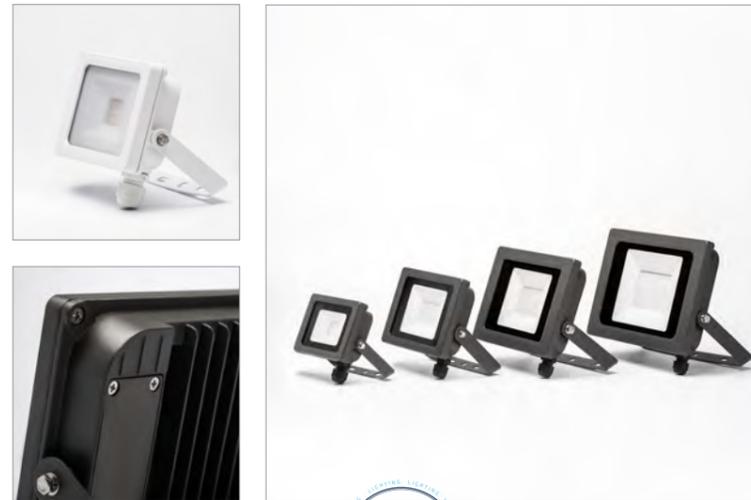

THREELINE  
100 actual lm/W  
100 lm/W réels

	IPRN10W	IPRN20W	IPRN30W	IPRN50W
A	126 mm	161 mm	205 mm	233 mm
B	122,5 mm	156 mm	190 mm	216 mm
C	33,5 mm	33,5 mm	33,5 mm	34,5 mm

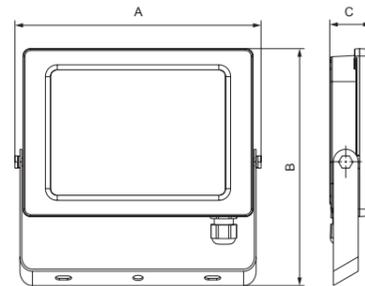

Icon	K	W	Beam	Light
IPRN10WBFNE	6500K	10 W	1300 lm	1000 lm
IPRN10WBNNE	4000K	10 W	1300 lm	1000 lm
IPRN10WBCNE	3000K	10 W	1300 lm	1000 lm
IPRN10WBNBL	4000K	10 W	1300 lm	1000 lm
IPRN20WBFNE	6500K	20 W	2600 lm	2000 lm
IPRN20WBNNE	4000K	20 W	2600 lm	2000 lm
IPRN20WBCNE	3000K	20 W	2600 lm	2000 lm
IPRN20WBNBL	4000K	20 W	2600 lm	2000 lm

Icon	K	W	Beam	Light
IPRN30WBFNE	6500K	30 W	3900 lm	3000 lm
IPRN30WBNNE	4000K	30 W	3900 lm	3000 lm
IPRN30WBCNE	3000K	30 W	3900 lm	3000 lm
IPRN30WBNBL	4000K	30 W	3900 lm	3000 lm
IPRN50WBFNE	6500K	50 W	6500 lm	5000 lm
IPRN50WBNNE	4000K	50 W	6500 lm	5000 lm
IPRN50WBCNE	3000K	50 W	6500 lm	5000 lm
IPRN50WBNBL	4000K	50 W	6500 lm	5000 lm

# IPROY


ECO IPRN100W / IPRN150W  
IPRN200W



• Material




• Certif.

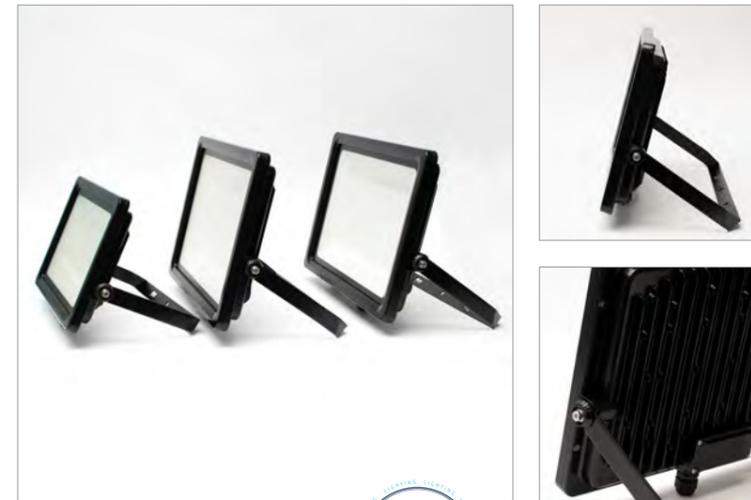

THREELINE  
100 actual lm/W  
100 lm/W réels

	IPRN100W	IPRN150W	IPRN200W
A	330 mm	390 mm	390 mm
B	275 mm	333 mm	333 mm
C	54 mm	59 mm	59 mm

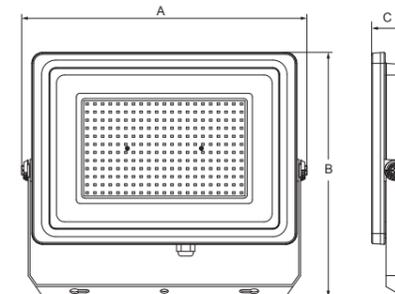

Icon	K	W	Beam	Light
IPRN100WBFNE	6500K	100 W	13000 lm	10000 lm
IPRN100WBNNE	4000K	100 W	13000 lm	10000 lm
IPRN100WBCNE	3000K	100 W	13000 lm	10000 lm
IPRN150WBFNE	6500K	150 W	19500 lm	15000 lm
IPRN150WBNNE	4000K	150 W	19500 lm	15000 lm
IPRN200WBFNE	6500K	200 W	30000 lm	20000 lm
IPRN200WBNNE	4000K	200 W	30000 lm	20000 lm