




CLÍNICA DENTIBELA, Castellón (Spain)
Interior design: www.vitale.es
Photography: www.vitale.es

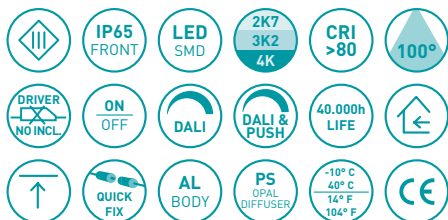

NORWAY gen2

ROUND



3CCT



NORWAY Round 9

	W	mA	K	Real lm	△	ØxH (mm.)	⤵	Kg
○ 1.1110.0118	9	250	2K7-3K2-4K	935-1035-1040	100°	120x50	Ø112x70	0,26

Drivers ON-OFF

4.1069.1101 150-500mA 21W 200-240V

4.3061.1101 EU 250mA 2,5-12W 220-240V

Drivers DALI & PUSH

4.1069.6102 150-1050mA 8-42W 220-240V



NORWAY Round 15

	W	mA	K	Real lm	△	ØxH (mm.)	⤵	Kg
○ 1.1111.0118	15	350	2K7-3K2-4K	1435-1575-1580	100°	155x52	Ø145x72	0,36


Drivers ON-OFF

4.1069.1101 150-500mA 21W 200-240V

4.3061.1103 EU 350mA 3-15W 240V

Drivers DALI & PUSH

4.1069.6102 150-1050mA 8-42W 220-240V



NORWAY Round 20

	W	mA	K	Real lm	△	ØxH (mm.)	⤵	Kg
○ 1.1112.0118	20	500	2K7-3K2-4K	1925-2135-2140	100°	175x55	Ø165x75	0,53

Drivers ON-OFF

4.1069.1101 150-500mA 21W 200-240V

4.3069.1101 EU 125-500mA 5,5-22W 220-240V

Driver DALI & PUSH

4.1069.6102 150-1050mA 8-42W 220-240V

4.3069.6101 EU 300-1050mA 3-38W 220-240V

DETALLES DETAILS DÉTAILS



Switch ajustable de temperatura
Adjustable temperature switch
Régulateur de température




Pieza anti-tirón cable
Cable clamp
Serre-câble




Conector rápido
Quick connector
Connecteur rapide



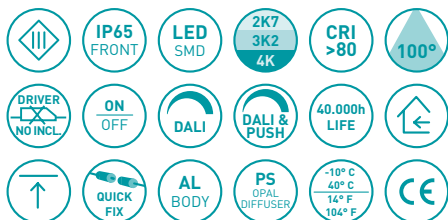

NORWAY^{gen2}

SQUARE



NORWAY Square 9

	W	mA	K	Real lm	△	LxDxH (mm.)	⚡	Kg
○ 1.1115.0118	9	250	2K7-3K2-4K	905-1005-1010	100°	110x110x50	105x105x70	0,30


Drivers ON-OFF

4.1069.1101 150-500mA 21W 200-240V

4.3061.1101 EU 250mA 2,5-12W 220-240V

Drivers DALI & PUSH

4.1069.6102 150-1050mA 8-42W 220-240V



NORWAY Square 15

	W	mA	K	Real lm	△	LxDxH (mm.)	⚡	Kg
○ 1.1116.0118	15	350	2K7-3K2-4K	1335-1490-1495	100°	145x145x55	135x135x75	0,47


Drivers ON-OFF

4.1069.1101 150-500mA 21W 200-240V

4.3061.1103 EU 350mA 3-15W 240V

Drivers DALI & PUSH

4.1069.6102 150-1050mA 8-42W 220-240V



NORWAY Square 20

	W	mA	K	Real lm	△	LxDxH (mm.)	⚡	Kg
○ 1.1117.0118	20	500	2K7-3K2-4K	1940-2165-2170	100°	170x170x55	160x160x75	0,60

Drivers ON-OFF

4.1069.1101 150-500mA 21W 200-240V

4.3069.1101 EU 125-500mA 5,5-22W 220-240V

Driver DALI & PUSH

4.1069.6102 150-1050mA 8-42W 220-240V

4.3069.6101 EU 300-1050mA 3-38W 220-240V

DETALLES DETAILS DÉTAILS



Switch ajustable de temperatura
Adjustable temperature switch
Régulateur de température



Pieza anti-tirón cable
Cable clamp
Serre-câble



Conector rápido
Quick connector
Connecteur rapide