



ITALY

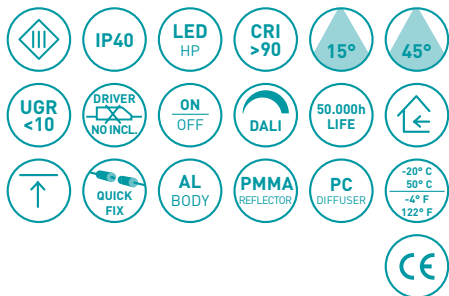

ITALY 2	W	mA	K	Real lm	△	LxDxH (mm.)	⌵	Kg
● 1.1000.0112	2	500 / 600	3000	150	15°	45x45x49	40x37x65	0,06
● 1.1002.0112	2	500 / 600	3000	140	45°	45x45x49	40x37x65	0,06

Drivers ON-OFF

4.1131.1101 600mA 1-3W 100-240V

4.3042.1101 EU 500mA 6W 100-240V


Driver DALI *

4.3049.3102 EU 250-700mA 20W 100-240V

* Instalación driver en techo registrable.

* Driver installation in accessible ceiling.

* Installation du driver dans un plafond accessible.



ITALY 4	W	mA	K	Real lm	△	LxDxH (mm.)	⌵	Kg
● 1.1010.0112	2x2	500 / 600	3000	300	15°	75x45x49	69x37x65	0,11
● 1.1012.0112	2x2	500 / 600	3000	280	45°	75x45x49	69x37x65	0,11

Drivers ON-OFF


4.1022.1101 500mA 3W 100-277V

4.1032.1103 500mA 2,5-5W 200-240V

4.3062.1101 EU 500mA 2,5-22W 200-240V

Driver DALI

4.3049.3102 EU 250-700mA 20W 100-240V



ITALY 10	W	mA	K	Real lm	△	LxDxH (mm.)	⚡	Kg
● 1.1020.0112	5x2	500 / 600	3000	720	15°	147x45x49	139x37x65	0,23
● 1.1022.0112	5x2	500 / 600	3000	700	45°	147x45x49	139x37x65	0,23

Drivers ON-OFF


4.1012.1101 500mA 9W 100-240V

4.1069.1101 150-500mA 21W 200-240V

4.3062.1101 EU 500mA 2,5-22W 200-240V

Driver DALI & PUSH

4.3069.6101 EU 300-1050mA 3-38W 220-240V



ITALY 20	W	mA	K	Real lm	△	LxDxH (mm.)	⚡	Kg
● 1.1030.0112	10x2	500 / 600	3000	1440	15°	280x45x49	273x37x65	0,45
● 1.1032.0112	10x2	500 / 600	3000	1400	45°	280x45x49	273x37x65	0,45

Drivers ON-OFF


4.1069.1101 150-500mA 21W 200-240V

4.3062.1101 EU 500mA 2,5-22W 200-240V

Driver DALI & PUSH

4.3069.6101 EU 300-1050mA 3-38W 220-240V

DETALLES DETAILS DÉTAILS

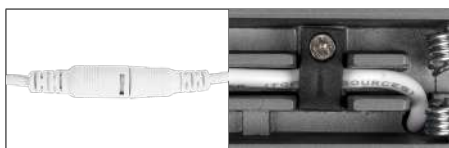

Conector rápido
Quick connector
Connecteur rapide

Pieza anti-tirón cable
Cable clamp
Serre-câble

● Blanco/Negro White/Black Blanc/Noir