





OUTDOOR - IN-GROUND FIXTURES

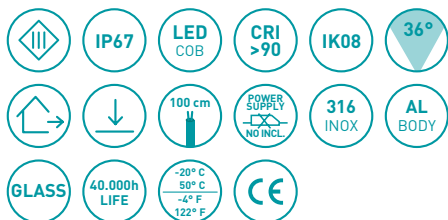

ZÜRICH

STAINLESS STEEL


24V



ZÜRICH 3	W	K	Real lm	▽	V	ØxH (mm.)	concrete	Kg
● 2.4130.0512	3	3000	210	36°	24	63x65	Ø51x90	0,37
● 2.4131.0512 with honeycomb	3	3000	195	36°	24	63x65	Ø51x90	0,37

 Power supply ON-OFF IP67
4.2042.1501 0-20W 24V 100-240V

 Dim Power supply Casambi IP67
4.9101.5002 0-120W 24V 90-305V



ZÜRICH 13	W	K	Real lm	▽	V	ØxH (mm.)	concrete	Kg
● 2.4132.0512	13	3000	910	36°	24	98x98	Ø81x120	0,90
● 2.4133.0512 with honeycomb	13	3000	850	36°	24	98x98	Ø81x120	0,90

 Power supply ON-OFF IP67
4.2042.1502 0-60W 24V 100-240V

 Dim Power supply Casambi IP67
4.9101.5002 0-120W 24V 90-305V

DETALLES DETAILS DÉTAILS



Frontal sin tornillos
Seentless screws cover
Frontal sans vis

Válvula de presión
Pressure equalize valve
Valve de pression

Cajetín empotrar de PVC incluido
PVC Recessed box included
Boîte d'encastrement en PVC incluse

Panel de abeja
Honeycomb
Nid d'abeille

Cable con H2O Stop
Wire with H2O Stop
Câble avec H2O Stop