


HOOP



Hoop è una sospensione realizzata in alluminio verniciato bianco opaco ed equipaggiata con schermo diffondente in PMMA. Si installa a sospensione mediante tre cavi in acciaio rivestiti con guaina trasparente e regolabili in altezza grazie ai tre “grip locks” posizionati sul corpo dell’apparecchio. Grazie a Hoop si ottengono effetti di luce morbida e diffusa adatti ad illuminare gli ambienti in modo confortevole e senza ombre dure. Il driver incluso può essere On/Off o dimmerabile multifunzione con controllo 1...10V, Push, DALI, ed alimenta una sorgente LED SMD ad alta efficienza. Hoop è disponibile nella versione a sospensione in diverse misure e potenze, e si completa con le analoghe versioni a plafone.

Hoop is a pendant made of matt white painted aluminium and equipped with a PMMA diffusing screen. It is suspended with three steel cables covered with transparent sheath and adjustable in height thanks to the three “grip locks” positioned on the body of the appliance. Thanks to Hoop, soft and diffused light effects are obtained, suitable for illuminating indoor ambients comfortably and without harsh shadows. The driver included can be On/Off or dimmable multifunction 1... 10V, Push, DALI controlled, and feeds a high efficiency SMD LED source. Hoop is available in the pendant version in different sizes and powers and is completed with the similar ceiling versions.

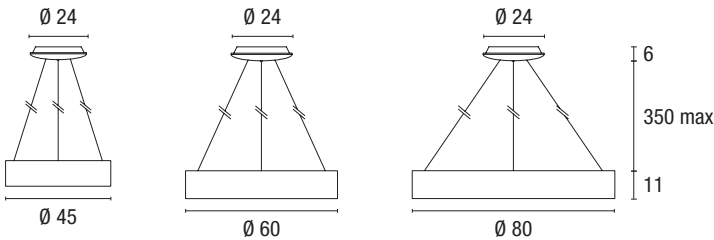

Optical Info p. 535

Description	Colour	Power	Source	Lumen Output	CCT	Weight	Code
Ø 45_ On / Off	White	32 W	SMD LED	1920 lm	3000K	1,6 kg	SOS00113
Ø 60_ On / Off	White	42 W	SMD LED	2520 lm	3000K	2,3 kg	SOS00116
Ø 80_ On / Off	White	62 W	SMD LED	3720 lm	3000K	3,0 kg	SOS00119
Ø 45_ DALI / 1...10 V / Push	White	32 W	SMD LED	1920 lm	3000K	1,6 kg	SOS00113DA
Ø 60_ DALI / 1...10 V / Push	White	42 W	SMD LED	2520 lm	3000K	2,3 kg	SOS00116DA
Ø 80_ DALI / 1...10 V / Push	White	62 W	SMD LED	3720 lm	3000K	3,0 kg	SOS00119DA

 220÷240Vac I IP20 Versioni dimmerabili: regolazione della luminosità 0/1 - 100 % - Dimmable versions: light regulation 0/1 - 100 %